



MHT1-100/200/300

Aluminium alloy 4 wire track




MHT1-C/L or MHT1-C/R

Power adaptor




MHT1-I

Small straight connector




MHT1-IL

Big straight connector




MHT1-A

Adjustable connector




MHT1-L/L or MHT1-L/R

L connector




MHT1-T/L or MHT1-T/R

T connector





MHT1-X

X connector




MHT1-N

End cap




MHT1-H1

Fixture adaptor

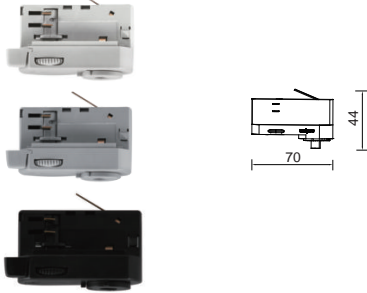


MHT-H3

Fixture adaptor




A70

Fixture adaptor

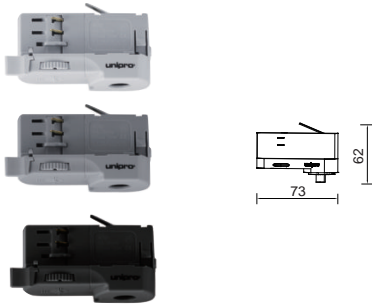


MHT-H12

Fixture adaptor



MHT-H6 Box

Fixture adaptor



MHT-H11 Box

Fixture adaptor



Pendant Light Accessories

MHT1-P15/30/50
(1.5M/3M/5M)



MHT1-P2



MHT1-P1



	Model	Input Voltage	Power factor	Max output power	Output Voltage	Output Current	Eff	Certification	IP	Ta	Tc Max	Wiring	Dim	Type
	KT-LD0301-MS	100-240	0.6	4w	6-10v	300mA	0.75	-	IP20	-10 ~50°C	80°C	Loose wire	31.5*30*21	AD-DC Constant Current
	KEP0301-350B1	100-240	0.65	5w	3-10.5V	320mA	0.75	-	IP20	-10 ~50°C	85°C	Screw Terminal	55*40*20	
	KEP0203-700B1	100-240	0.65	6w	3-7V	650mA	0.75	-	IP20	-10 ~50°C	85°C	Screw Terminal	55*40*20	AD-DC Constant Current
	KEP-LD05W-A1	100-240	0.65	7.5w	3-18V	320mA	0.75	UL	IP20	-10 ~50°C	85°C	Screw Terminal	55*40*20	
	KEP0301-350A1	100-240	0.65	5w	3-10.5V	320mA	0.75	CE	IP20	-10 ~50°C	85°C	Loose wire	47*29*25	
	KEP0401-350A1	100-240	0.65	6w	3-15V	320mA	0.75	-	IP20	-10 ~50°C	85°C	Loose wire	47*29*25	AD-DC Constant Current
	KEP0203-700A1	100-240	0.65	6w	3-7V	650mA	0.75	CE	IP20	-10 ~50°C	85°C	Loose wire	47*29*25	
	KEP0601-350A1	100-240	0.8	8w	9-21V	320mA	0.75	-	IP20	-10 ~50°C	85°C	Loose wire	72*36*23	
	KEP0303-700A1	100-240	0.8	9w	3-11V	650mA	0.75	-	IP20	-10 ~50°C	85°C	Loose wire	72*36*23	AD-DC Constant Current
	KEP-LD09W-B1	100-240	0.85	12w	18-31V	320mA	0.75	UL	IP20	-10 ~50°C	85°C	Loose wire	72*36*23	
	KEP0901-350A1	100-240	0.85	12w	12-31V	320mA	0.75	CE	IP20	-10 ~50°C	85°C	Screw Terminal	92*38*25	AD-DC Constant Current
	KEP0403-700A1	100-240	0.85	10w	3-11V	650mA	0.75	CE	IP20	-10 ~50°C	85°C	Screw Terminal	92*38*25	
	KEP0601-350B1	100-240	0.8	8w	9-21V	320mA	0.75	CE	IP20	-10 ~50°C	85°C	Loose wire	Ø50*22	AD-DC Constant Current
	KEP0303-700B1	100-240	0.8	9w	3-11V	650mA	0.75	CE	IP20	-10 ~50°C	85°C	Loose wire	Ø50*22	
	KEP0901-350B1	100-240	0.85	12w	12-31V	320mA	0.75	CE	IP20	-10 ~50°C	85°C	Screw Terminal	132*38*25	AD-DC Constant Current
	KEP0301-8517	100-240	0.85	4w	3-10V	320mA	0.75	CE	IP20	-10 ~50°C	85°C	Screw Terminal	132*38*25	
	KEP1001-350A1	100-240	0.85	13w	18-35V	320mA	0.78	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
	KEP1501-350A1	100-240	0.85	18.5w	30-53V	320mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
	KEP0603-700A1	100-240	0.85	18w	9-21V	650mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	AD-DC Constant Current
	KEP-LD18W-C1	100-240	0.85	20w	30-56V	320mA	0.8	UL	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
	KEP0902-500A1	100-240	0.85	18w	18-31V	500mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
	KEP1001-350B1	100-240	0.85	13w	18-35V	320mA	0.75	-	IP20	-10 ~50°C	85°C	Loose wire	Ø75*30	AD-DC Constant Current
	KEP1501-350B1	100-240	0.85	18.5w	30-53V	320mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	Ø75*30	

Model	Input Voltage	Power factor	Max output power	Output Voltage	Output Current	Eff	Certification	IP	Ta	Tc Max	Wiring	Dim	Type
KEP0603-700B1	100-240	0.85	18w	9-21V	650mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	Ø75*30	AD-DC Constant Current
KEP-LD18W-D1	100-240	0.85	20w	30-56V	320mA	0.8	UL	IP20	-10 ~50°C	85°C	Loose wire	Ø75*30	
 KEP0902-500B1	100-240	0.85	18w	18-31V	500mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	Ø75*30	
AK30W-350-D9	100-240	0.95	30w	45-76V	320mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	122*38*25	
AK30W-400-D9	100-240	0.95	30w	24-53V	400mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	122*38*25	
AK30W-500-D9	100-240	0.95	30w	24-50V	500mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	122*38*25	
AK30W-700-D6	100-240	0.95	30w	18-36V	650mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	122*38*25	
 KEP36W-5370A1	100-240	0.95	36w	25-43V	650mA	0.8	CE, CB, SAA	IP20	-10 ~50°C	85°C	Screw Terminal	145*48*31	AD-DC Constant Current
KEP40W-4310A1	100-240	0.95	40w	25-43V	1000mA	0.8	CE, CB, SAA	IP20	-10 ~50°C	85°C	Screw Terminal	145*48*31	
KEP50W-4312A1	100-240	0.95	50w	25-35V	1200mA	0.8	CE, CB, SAA	IP20	-10 ~50°C	85°C	Screw Terminal	145*48*31	
 KEP-LD18W-E1	100-240	0.85	20w	30-56V	320mA	0.8	UL	IP65	-10 ~50°C	85°C	Loose wire	128*43*32	AD-DC Constant Current
 KEP30W-4310A2	100-240	0.95	30w	25-43V	1000mA	0.8	-	IP65	-10 ~50°C	85°C	Loose wire	147*49*42	AD-DC Constant Current
KEP50W-4315A2	100-240	0.95	50w	25-35V	1200mA	0.8	-	IP65	-10 ~50°C	85°C	Loose wire	147*49*42	
 KEP-DIM20W-36500-D6	200-240	0.6	22w	30-53V	320mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	AD-DC Constant Current Dimmable
KEP-DIM10W-36350-D6	200-240	0.6	12w	18-35V	320mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
TRIAC KEP-DIM20W-60350-D6	200-240	0.6	20w	18-35V	500mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
 AK-10W-36330-D5	100-240	0.6	12w	18-35V	330mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	92*38*25	AD-DC Constant Current
AK-10W-24500-D5	100-240	0.6	13w	15-24V	500mA	0.83	CE	IP20	-10 ~50°C	85°C	Screw Terminal	92*38*25	
AK-16W-60330-D6	100-240	0.6	20w	30-53V	330mA	0.83	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	AD-DC Constant Current
 AK30W-350-D6	100-240	0.95	30w	45-76V	320mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
AKP30W-400-D6	100-240	0.95	30w	24-53V	400mA	0.8	-	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
AK30W-500-D6	100-240	0.95	30w	24-50V	500mA	0.8	-	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
KEP30W-700-D6	100-240	0.95	30w	18-36V	650mA	0.8	-	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
 KEP-55W-BFAN	100-240	0.95	50w	25-35V	1800mA	0.8	-	IP20	-10 ~50°C	85°C	Screw Terminal	124*80*33	