

OUTDOOR LIGHT



LED  220-240 V  IP54  SMD  LIFUD

	W	LUM	CCT	BEAM	CRI
WL622	3	48	3000K	/	80

PLUTO FAMILY- WALL LIGHT


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION /

DRIVER OPTION /

TECH. DRAWING size in mm



LED  220-240 V  IP54  SMD  LIFUD

	W	LUM	CCT	BEAM	CRI
WL623	3	42	3000K	/	80

PLUTO FAMILY- WALL LIGHT


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION /

DRIVER OPTION /

TECH. DRAWING size in mm





PLUTO FAMILY- WALL LIGHT

OPTIONS

- Color RAL 9016 RAL 9006 RAL 9005
- CCT 2700K 3000K 4000K
- CRI 80 90


SOURCE OPTION /

DRIVER OPTION /

LED  220-240 V  IP54  SMD  LIFUD

	W	LUM	CCT	BEAM	CRI
WL624	10	640	3000K	/	80

TECH. DRAWING size in mm

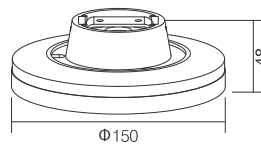

PLUTO FAMILY- WALL LIGHT

OPTIONS

- Color RAL 9016 RAL 9006 RAL 9005
- CCT 2700K 3000K 4000K
- CRI 80 90


SOURCE OPTION /

DRIVER OPTION /

LED  220-240 V  IP54  SMD  LIFUD

	W	LUM	CCT	BEAM	CRI
WL625	12	696	3000K	/	80

TECH. DRAWING size in mm

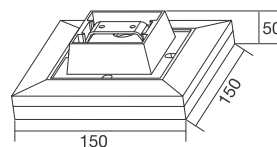


OUTDOOR LIGHT



ECLIPSE FAMILY MOULD WALL LIGHT

TECH. DRAWING

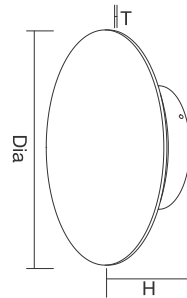

ECLIPSE FAMILY

LED  220-240 V  IP65 EDISON  KEGU

	W	LUM	CCT	BEAM	CRI	DIA	T	H
WL601	10	798	3000K	/	80	Φ200mm	3mm	53mm
WL602	15	1100	3000K	/	80	Φ300mm	3mm	68mm
WL603	20	1200	3000K	/	80	Φ400mm	3mm	88mm

OPTIONS

- IP Rating IP20 IP65
 Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90


SOURCE OPTION


TELEYA

DRIVER OPTION

AREEK


REFERENCE DRAWING

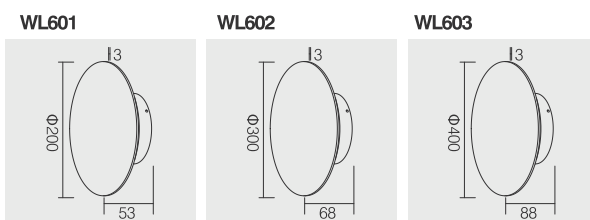

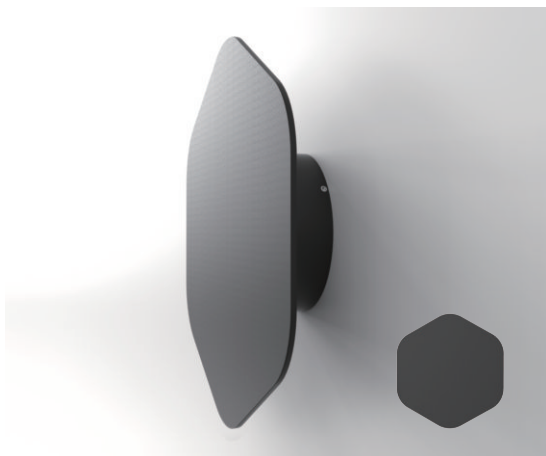

ECLIPSE FAMILY
HAXAGONAL MOULD WALL LIGHT

TECH. DRAWING

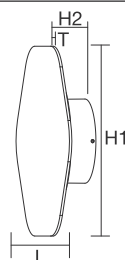

ECLIPSE FAMILY

LED  220-240 V  EDISON 


	W	LUM	CCT	BEAM	CRI	L	H1	T	H2
WL601A	10	798	3000K	/	80	250mm	250mm	3mm	53mm
WL602A	15	1100	3000K	/	80	300mm	300mm	3mm	68mm
WL603A	20	1200	3000K	/	80	350mm	350mm	3mm	88mm

OPTIONS

- IP Rating IP20 IP65
- Color RAL 9016 RAL 9006 RAL 9005
- CCT 2700K 3000K 4000K
- CRI 80 90

SOURCE OPTION	TELEYA
DRIVER OPTION	AREEK

REFERENCE DRAWING

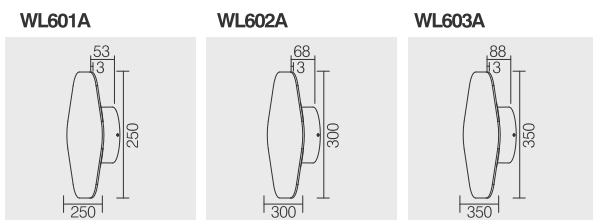


OUTDOOR LIGHT



ECLIPSE FAMILY SQUARE MOULD WALL LIGHT

TECH. DRAWING



ECLIPSE FAMILY

LED  220-240 V  IP65  EDISON  KEGU

	W	LUM	CCT	BEAM	CRI	L	H1	T	H2
WL601B	10	798	3000K	/	80	220mm	220mm	3mm	53mm
WL602B	15	1100	3000K	/	80	280mm	280mm	3mm	68mm
WL603B	20	1200	3000K	/	80	380mm	380mm	3mm	83mm

OPTIONS

- IP Rating IP20 IP65
 Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90


SOURCE OPTION


TELEYA

DRIVER OPTION

AREEK


REFERENCE DRAWING

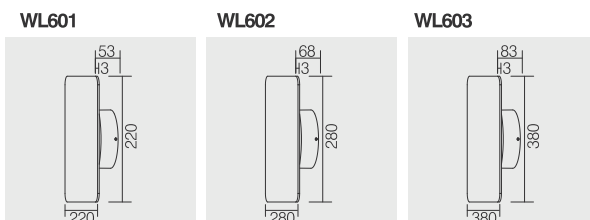

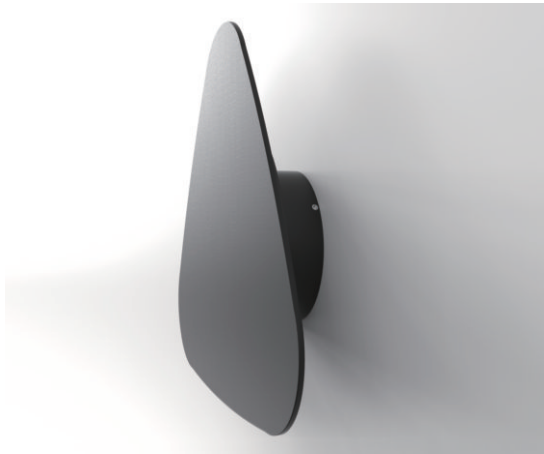

ECLIPSE FAMILY TRIANGULAR MOULD WALL LIGHT

TECH. DRAWING



ECLIPSE FAMILY

LED  220-240 V IP65 EDISON KEGU


	W	LUM	CCT	BEAM	CRI	L	H1	T	H2
WL601C	10	798	3000K	/	80	300mm	300mm	3mm	53mm
WL602C	15	1100	3000K	/	80	350mm	350mm	3mm	68mm
WL603C	20	1200	3000K	/	80	400mm	400mm	3mm	88mm

OPTIONS

- IP Rating IP20 IP65
 Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION	TELEYA
DRIVER OPTION	AREEK

PICTURES

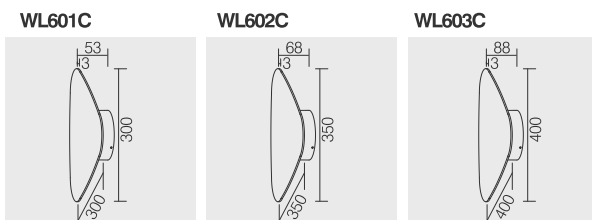

OUTDOOR LIGHT



LED 100-240 V IP65 CREE AREEK

	W	LUM	CCT	BEAM	CRI
FL937	8	480	3000K	4°	80

EXTREM NARROW BEAM ANGLE TILTABLE GARDEN LIGHT


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION /

DRIVER OPTION HEP / KEGU

TECH. DRAWING size in mm



LED 100-240 V IP65 CITIZEN AREEK

	W	LUM	CCT	BEAM	CRI
FL937A	12	607	3000K	25°	80

EXTREM NARROW BEAM ANGLE TILTABLE GARDEN LIGHT


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 15° 25° 38° 60°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION Bridgelux

DRIVER OPTION TRIDONIC / HEP

TECH. DRAWING size in mm



OUTDOOR LIGHT



EXTREM NARROW BEAM ANGLE GROUND LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION

/


DRIVER OPTION

HEP / KEGU

LED  100-240 V IP65 CREE AREEK

	W	LUM	CCT	BEAM	CRI
KT568	8	480	3000K	4°	80

TECH. DRAWING size in mm



EXTREM NARROW BEAM ANGLE GROUND LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION

Bridgelux


DRIVER OPTION

TRIDONIC / HEP

LED  100-240 V IP65 CITIZEN AREEK

	W	LUM	CCT	BEAM	CRI
KT568A	12	607	3000K	25°	80

TECH. DRAWING size in mm



OUTDOOR LIGHT



LED  AC 220-240 V IP65 SMD

	W	LUM	CCT	BEAM	CRI
WL569	12	569	3000K	/	80

LACUNA FAMILY- IP65 WALL LIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005


CCT 2700K 3000K 4000K


CRI 80 90

SOURCE OPTION /

DRIVER OPTION /

TECH. DRAWING size in mm



LED  AC 220-240 V IP65 SMD

	W	LUM	CCT	BEAM	CRI
WL576	16	860	3000K	/	80

LACUNA FAMILY- IP65 WALL LIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005


CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION /

DRIVER OPTION /

TECH. DRAWING size in mm

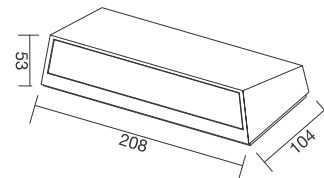



LACUNA FAMILY- IP65 WALL LIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION /

DRIVER OPTION /

LED  AC 220-240 V IP65 SMD

	W	LUM	CCT	BEAM	CRI
WL577	20	1000	3000K	/	80

TECH. DRAWING size in mm

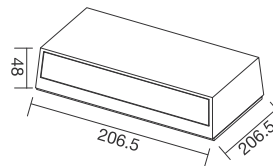

LACUNA FAMILY- IP65 WALL LIGHT

OPTIONS


Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION /

DRIVER OPTION /

LED  AC 220-240 V IP65 SMD

	W	LUM	CCT	BEAM	CRI
WL558	8	223	3000K	/	80

TECH. DRAWING size in mm

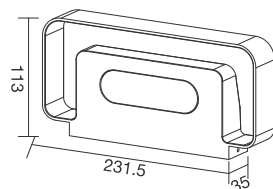


OUTDOOR LIGHT



CERTUS FAMILY FIXED WALL LIGHT

TECH. DRAWING



CERTUS FAMILY

LED  AC 220-240 V IP65 ZOM

	W	LUM	CCT	BEAM	CRI	DIA	W	H
WL581	2x6	2x420	3000K	30°	80	Φ65mm	56mm	90mm
WL582	2x8	2x560	3000K	30°	80	Φ91mm	91mm	125mm
WL583	2x15	2x1050	3000K	40°	80	Φ120mm	150mm	152mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION


EDISON

DRIVER OPTION


/

REFERENCE DRAWING


WL581



WL582




WL583





**CERTUS FAMILY
FIXED WALL LIGHT**

TECH. DRAWING



CERTUS FAMILY

LED  AC 220-240 V IP65 ZOM

	W	LUM	CCT	BEAM	CRI	L	T	H
WL581A	4x6	4x420	3000K	30°	80	148mm	95mm	90mm
WL582A	4x8	4x560	3000K	30°	80	203mm	126mm	92mm
WL583A	4x15	4x1050	3000K	40°	80	270mm	150mm	150mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION


EDISON

DRIVER OPTION


/

REFERENCE DRAWING


WL581A



WL582A



WL583A




OUTDOOR LIGHT



CERTUS FAMILY FIXED WALL LIGHT

TECH. DRAWING



CERTUS FAMILY

LED  AC 220-240 V IP65 ZOM

	W	LUM	CCT	BEAM	CRI	DIA	W	H
WL581B	8	540	3000K	30°	80	Φ65mm	56mm	90mm
WL582B	10	770	3000K	30°	80	Φ91mm	91mm	125mm
WL583B	20	1800	3000K	40°	80	Φ120mm	150mm	151mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION


EDISON

DRIVER OPTION


/

REFERENCE DRAWING

WL581B



WL582B



WL583B

