


RECESSED DOWNLIGHT



OLSO FAMILY TILTABLE & ROTATABLE DOWNLIGHT

TECH. DRAWING



OLSO FAMILY

LED  AC 220-240 V IP20 ZMO


	W	LUM	CCT	BEAM	CRI	DIA	H	T	CUTOUT
KT6793	10	650	3000K	30°	80	Φ90mm	130mm	30mm	Φ98mm
KT6794	15	950	3000K	30°	80	Φ105mm	145mm	32mm	Φ98mm
KT6795	20	1200	3000K	30°	80	Φ120mm	160mm	33mm	Φ98mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 10° 20° 30°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION	LUMENS
DRIVER OPTION	/

REFERENCE DRAWING

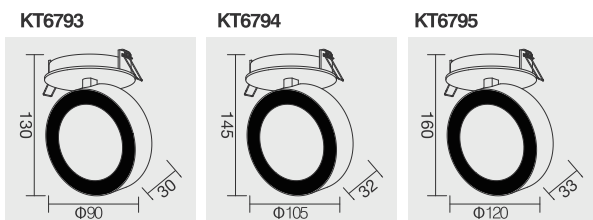


RECESSED DOWNLIGHT



ZOOMER FAMILY TILTABLE ZOOMER DOWNLIGHT

TECH. DRAWING



ZOOMER FAMILY

LED  100-240 V IP20 **KT6985** Bridgelux **KT6985-1** CITIZEN **AREEK**

	W	LUM	CCT	BEAM	CRI	DIA	H	CUTOUT
KT6985	15	360-530	3000K	8-45°	80	Φ96mm	135mm	Φ81mm
KT6985-1	30	1150-2250	3000K	18-55°	80	Φ110mm	139mm	Φ92mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

KT6985 SOURCE OPTION

CITIZEN

KT6985-1 SOURCE OPTION


Bridgelux

DRIVER OPTION


OSRAM / TCI / TRIDONIC / LIFUD

REFERENCE DRAWING

KT6985



KT6985-1



RECESSED DOWNLIGHT



LED  100-240 V IP20 CREE AREEK

	W	LUM	CCT	BEAM	CRI
KT6989	8	640	3000K	4°	80

EXTREM NARROW BEAM ANGLE TILTABLE RECESSED DOWNLIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90


SOURCE OPTION

/

DRIVER OPTION

HEP / KEGU

TECH. DRAWING size in mm



LED  100-240 V IP20 CITIZEN AREEK

	W	LUM	CCT	BEAM	CRI
KT6989A	12	994	3000K	25°	80

EXTREM NARROW BEAM ANGLE TILTABLE RECESSED DOWNLIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 15° 25° 38° 60°
 CCT 2700K 3000K 4000K
 CRI 80 90


SOURCE OPTION

Bridgelux

DRIVER OPTION

TRIDONIC / HEP / LIFUD / KEGU

TECH. DRAWING size in mm



RECESSED DOWNLIGHT



LED  100-240 V IP20 CREE AREEK

	W	LUM	CCT	BEAM	CRI
KT6990	8	370	3000K	4°	80

EXTREM NARROW BEAM ANGLE TILTABLE & ROTATABLE DOWNLIGHT

OPTIONS



Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION /

DRIVER OPTION

HEP / KEGU

TECH. DRAWING size in mm

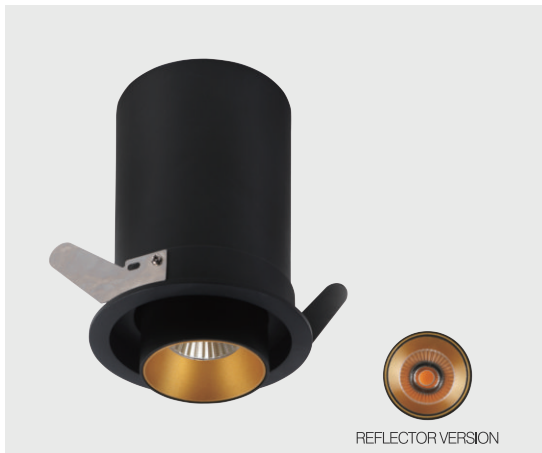

LED  100-240 V IP20 CITIZEN AREEK

	W	LUM	CCT	BEAM	CRI
KT6990A	12	994	3000K	25°	80

EXTREM NARROW BEAM ANGLE TILTABLE & ROTATABLE DOWNLIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 15° 25° 38° 60°
 CCT 2700K 3000K 4000K
 CRI 80 90


SOURCE OPTION

Bridgelux

DRIVER OPTION

TRIDONIC / HEP / LIFUD / KEGU

TECH. DRAWING size in mm




RECESSED DOWNLIGHT



LESS FAMILY TILTABLE RECESSED DOWNLIGHT

TECH. DRAWING



LESS FAMILY

LED  220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI	DIA	H	CUTOUT
KT6955	20	1400	3000K	38°	80	Φ121mm	86mm	Φ117mm
KT6956	30	2100	3000K	30°	80	Φ131mm	93mm	Φ126mm

OPTIONS

- Color RAL 9016 RAL 9006 RAL 9005
- Beam Angle KT6955 15° 24° 38°
- Beam Angle KT6956 18° 30°
- CCT 2700K 3000K 4000K
- CRI 80 90

SOURCE OPTION


EVERCORE / Bridgelux

DRIVER OPTION


TRIDONIC / LIFUD / AREEK / KEGU

REFERENCE DRAWING

KT6955



KT6956




RECESSED DOWNLIGHT



LESS FAMILY FIXED RECESSED DOWNLIGHT

TECH. DRAWING



LESS FAMILY

LED  220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI	DIA	H	CUTOUT
KT6957	20	1400	3000K	38°	80	Φ105mm	86mm	Φ93mm
KT6958	30	2100	3000K	30°	80	Φ115mm	93mm	Φ103mm

OPTIONS

- Color RAL 9016 RAL 9006 RAL 9005
- Beam Angle ^{KT6957} 15° 24° 38°
- Beam Angle ^{KT6958} 18° 30°
- CCT 2700K 3000K 4000K
- CRI 80 90

SOURCE OPTION


EVERCORE / Bridgelux

DRIVER OPTION


TRIDONIC / LIFUD / AREEK / KEGU

REFERENCE DRAWING

KT6957



KT6958



RECESSED DOWNLIGHT



LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
KT6967	8	800	3000K	38°	80

IBIS FAMILY - 360° GIMBAL


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38° <input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **Bridgelux**

DRIVER OPTION **AREEK / AcTEC / HEP / TRIDONIC**

TECH. DRAWING size in mm



LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
KT6967-2	2x8	2x800	3000K	38°	80

IBIS FAMILY - 360° GIMBAL


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38° <input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **Bridgelux**

DRIVER OPTION **AREEK / AcTEC / HEP / TRIDONIC**

TECH. DRAWING size in mm

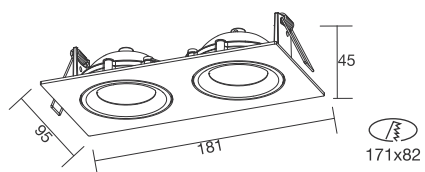

RECESSED DOWNLIGHT

IBIS FAMILY - 360° GIMBAL



OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38° <input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION Bridgelux

DRIVER OPTION AREEK / AcTEC / HEP / TRIDONIC

LED 220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
KT6915	8	800	3000K	38°	80

TECH. DRAWING size in mm



CUP FAMILY - FIXED DOWNLIGHT



OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38° <input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION Bridgelux

DRIVER OPTION TRIDONIC / KEGU / LIFUD

LED 100-240 V IP20 EVERCORE AREEK

	W	LUM	CCT	BEAM	CRI
KT6913	8	660	3000K	24°	80

TECH. DRAWING size in mm



RECESSED DOWNLIGHT



LED  100-240 V IP20 EVERCORE AREEK

	W	LUM	CCT	BEAM	CRI
KT6914	8	660	3000K	24°	80

CUP FAMILY - TILTABLE DOWNLIGHT



OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION **Bridgelux**

DRIVER OPTION **TRIDONIC / KEGU / LIFUD**

TECH. DRAWING size in mm

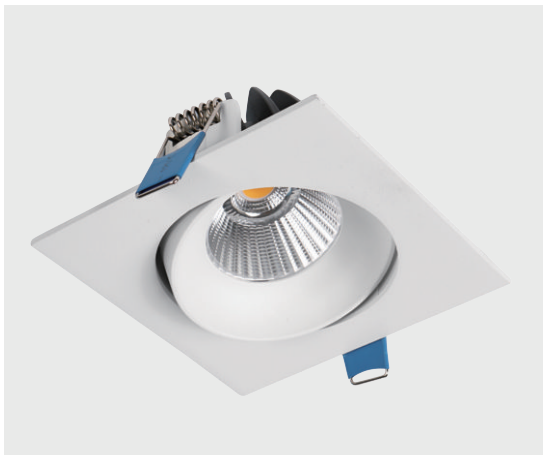

LED  100-240 V IP20 EVERCORE AREEK

	W	LUM	CCT	BEAM	CRI
KT6943	8	660	3000K	24°	80

CUP FAMILY - TILTABLE DOWNLIGHT


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION **Bridgelux**

DRIVER OPTION **TRIDONIC / KEGU / LIFUD**

TECH. DRAWING size in mm



RECESSED DOWNLIGHT



LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
KT6826	16	1100	3000K	25°	80

BOWL FAMILY - TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION **Bridgelux / EVERCORE**

DRIVER OPTION **AREEK / LIFUD / TRIDONIC**

TECH. DRAWING size in mm



LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
KT6827	16	1050	3000K	25°	80

BOWL FAMILY - TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION **Bridgelux / EVERCORE**

DRIVER OPTION **AREEK / LIFUD / TRIDONIC**

TECH. DRAWING size in mm




RECESSED DOWNLIGHT



PORTO FAMILY FIXED DOWNLIGHT

TECH. DRAWING



PORTO FAMILY

LED  220-240 V IP20 Bridgelux OSRAM

	W	LUM	CCT	BEAM	CRI	DIA	H	CUTOUT
KT6756	10	592	3000K	80°	80	Φ85mm	70mm	Φ75mm
KT6757	20	1212	3000K	80°	80	Φ107mm	85mm	Φ95mm
KT6758	36	2016	3000K	80°	80	Φ135mm	98mm	Φ115mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION

CITIZEN

DRIVER OPTION

KEGU / AREEK / LIFUD

REFERENCE DRAWING

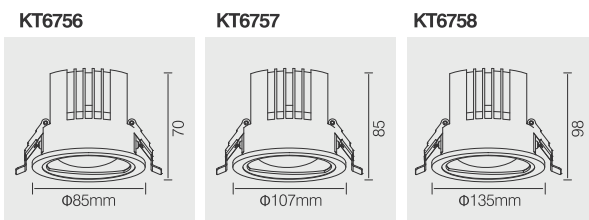


RECESSED DOWNLIGHT



HORN FAMILY FIXED DOWNLIGHT

TECH. DRAWING



HORN FAMILY

LED  220-240 V IP20 Bridgelux OSRAM


	W	LUM	CCT	BEAM	CRI	DIA	H	CUTOUT
KT6756A	10	600	3000K	24°	80	Φ115mm	70mm	Φ77mm
KT6757A	20	1200	3000K	24°	80	Φ138mm	85mm	Φ93mm
KT6758A	36	2520	3000K	24°	80	Φ164mm	98mm	Φ115mm

OPTIONS


- Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 12° 24° 36°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION	CITIZEN
DRIVER OPTION	KEGU / AREEK / LIFUD

REFERENCE DRAWING

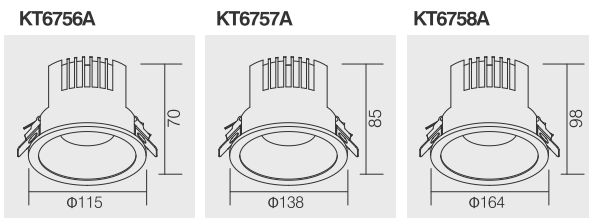


RECESSED DOWNLIGHT

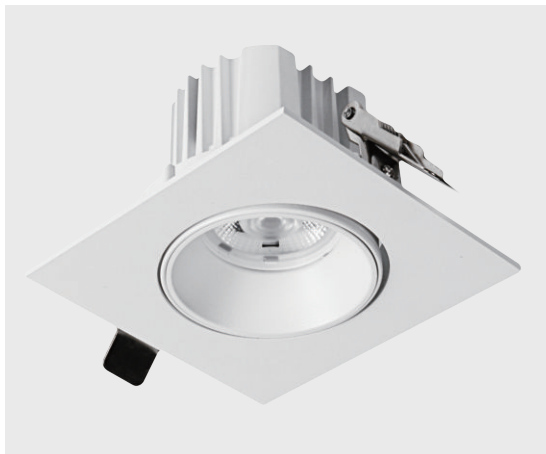

HORN FAMILY TILTABLE DOWNLIGHT

TECH. DRAWING



HORN FAMILY

LED  220-240 V IP20 Bridgelux OSRAM

	W	LUM	CCT	BEAM	CRI	LxT	H	CUTOUT
KT6756B	10	600	3000K	24°	80	115x115mm	70mm	Φ103mm
KT6757B	20	1200	3000K	24°	80	138x138mm	85mm	Φ128mm
KT6758B	36	2520	3000K	24°	80	164x164mm	98mm	Φ155mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 12° 24° 36°
 CCT 2700K 3000K 4000K
 CRI 80 90


SOURCE OPTION

CITIZEN

DRIVER OPTION

KEGU / AREEK / LIFUD

REFERENCE DRAWING

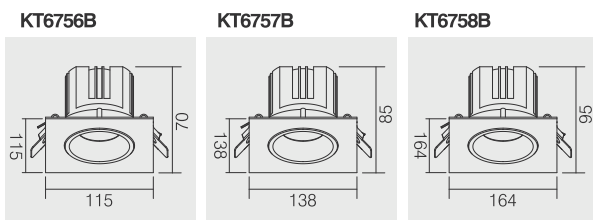


RECESSED DOWNLIGHT



HORN FAMILY TILTABLE DOWNLIGHT

TECH. DRAWING



HORN FAMILY

LED  220-240 V IP20 Bridgelux OSRAM


	W	LUM	CCT	BEAM	CRI	DIA	H	CUTOUT
KT6756C	10	600	3000K	24°	80	Φ115mm	70mm	Φ103mm
KT6757C	20	1200	3000K	24°	80	Φ138mm	85mm	Φ128mm
KT6758C	36	2520	3000K	24°	80	Φ164mm	98mm	Φ155mm

OPTIONS

- Color ○ RAL 9016 ○ RAL 9006 ○ RAL 9005
 Beam Angle ○ 12° ○ 24° ○ 36°
 CCT ○ 2700K ○ 3000K ○ 4000K
 CRI ○ 80 ○ 90

SOURCE OPTION	CITIZEN
DRIVER OPTION	KEGU / AREEK / LIFUD

REFERENCE DRAWING

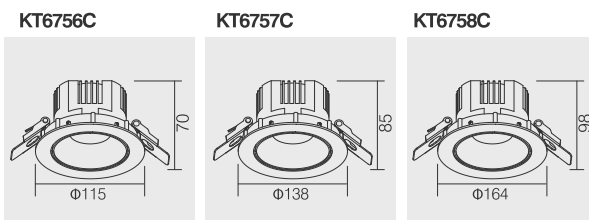


RECESSED DOWNLIGHT



ABRAS FAMILY- FIXED DOWNLIGHT

TECH. DRAWING



ABRAS FAMILY- FIXED DOWNLIGHT

LED  220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI	DIA	H	CUTOUT
KT6759	11	506	3000K	80°	80	Φ115mm	66mm	Φ105mm
KT6761	22	1452	3000K	80°	80	Φ139mm	78mm	Φ125mm
KT6763	30	1620	3000K	80°	80	Φ160mm	85mm	Φ145mm
KT6765	40	2560	3000K	80°	80	Φ195mm	95mm	Φ180mm
KT6767	56	3416	3000K	80°	80	Φ230mm	100mm	Φ215mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION

Bridgelux


DRIVER OPTION

KEGU / AREEK / LIFUD

REFERENCE DRAWING

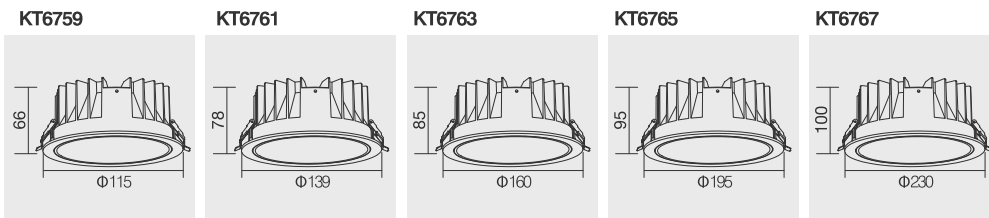


RECESSED DOWNLIGHT

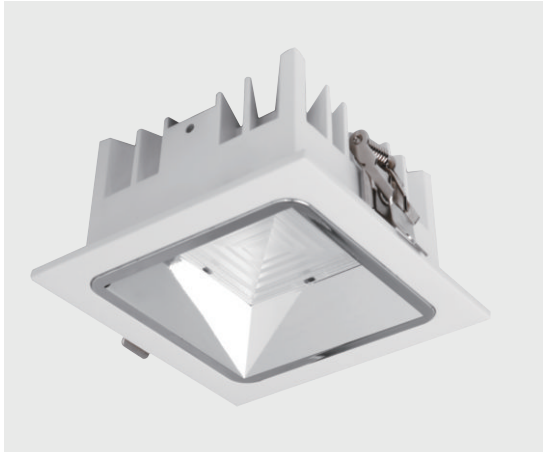

HUZAR FAMILY- FIXED DOWNLIGHT

TECH. DRAWING

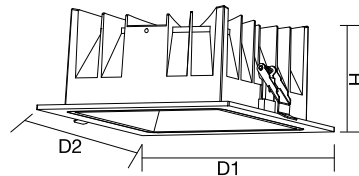

HUZAR FAMILY- FIXED DOWNLIGHT

LED  220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI	L X T	H	CUTOUT
KT6760	11	770	3000K	80°	80	115x115mm	63mm	105x105mm
KT6762	22	1430	3000K	80°	80	140x140mm	75mm	125x125mm
KT6764	30	2220	3000K	80°	80	160x160mm	81mm	145x145mm
KT6766	40	2740	3000K	80°	80	195x195mm	96mm	170x170mm

OPTIONS

Color ○ RAL 9016 ○ RAL 9006 ○ RAL 9005
 CCT ○ 2700K ○ 3000K ○ 4000K
 CRI ○ 80 ○ 90


SOURCE OPTION

Bridgelux

DRIVER OPTION

KEGU / AREEK / LIFUD

REFERENCE DRAWING

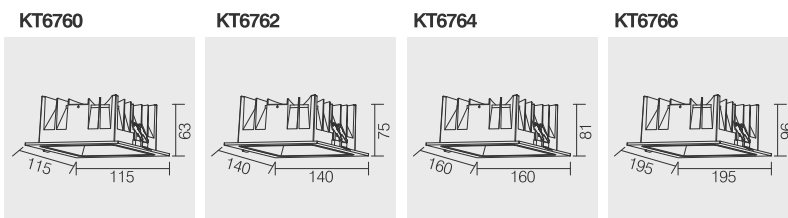


RECESSED DOWNLIGHT



IVORY FAMILY TILTABLE & ROTATABLE DOWNLIGHT

TECH. DRAWING



IVORY FAMILY

LED  220-240 V IP20 Bridgelux LIFUD

	W	LUM	CCT	BEAM	CRI	DIA	H	CUTOUT
KT6775	10	650	3000K	24°	80	Φ85mm	70mm	Φ75mm
KT6776	15	1125	3000K	24°	80	Φ115mm	90mm	Φ100mm
KT6777	25	2000	3000K	24°	80	Φ140mm	110mm	Φ128mm
KT6778	35	2625	3000K	60°	80	Φ165mm	130mm	Φ153mm
KT6779	45	3375	3000K	60°	80	Φ195mm	160mm	Φ175mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 24° 45°
 Beam Angle 15° 24° 38° 60°
 CCT 2700K 3000K 4000K
 CRI 80 90


SOURCE OPTION

CITIZEN / EVERCORE

DRIVER OPTION

OSRAM / KEGU

PICTURES

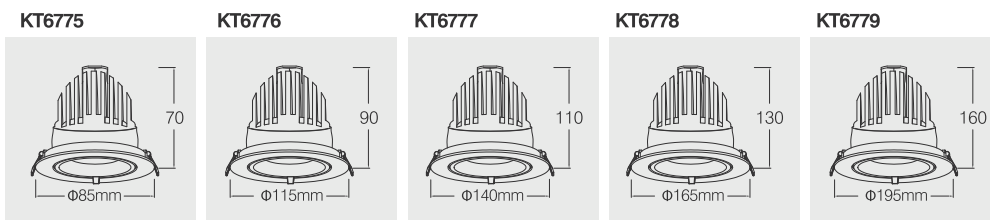

RECESSED DOWNLIGHT

THUNDER FAMILY- TILTABLE



LED  220-240 V IP20 Bridgelux LIFUD

	W	LUM	CCT	BEAM	CRI
KT6781	10	500	3000K	15°	80


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION CITIZEN

DRIVER OPTION OSRAM / KEGU

TECH. DRAWING size in mm



THUNDER FAMILY- TILTABLE



LED  220-240 V IP20 Bridgelux LIFUD

	W	LUM	CCT	BEAM	CRI
KT6782	10	500	3000K	15°	80


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION CITIZEN

DRIVER OPTION OSRAM / KEGU

TECH. DRAWING size in mm



RECESSED DOWNLIGHT



LED  220-240 V IP20 Bridgelux LIFUD

	W	LUM	CCT	BEAM	CRI
KT6787	10	500	3000K	15°	80

CANEO FAMILY-TILTABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION CITIZEN

DRIVER OPTION OSRAM / KEGU

TECH. DRAWING size in mm



LED  220-240 V IP20 Bridgelux LIFUD

	W	LUM	CCT	BEAM	CRI
KT6788	10	500	3000K	15°	80

CANEO FAMILY-TILTABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION CITIZEN

DRIVER OPTION OSRAM / KEGU

TECH. DRAWING size in mm



RECESSED DOWNLIGHT



RETROFIT DOWNLIGHTS FAMILY FIXED DOWNLIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 30°	<input type="radio"/> 60°	
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION **EVERCORE**

DRIVER OPTION **TRIDONIC / OSRAM / KEGU**

LED  220-240 V IP20 Bridgelux LIFUD

	W	LUM	CCT	BEAM	CRI
KT6594	11	810	3000K	30°	80

TECH. DRAWING size in mm



RETROFIT DOWNLIGHTS FAMILY WATERPROOF FIXED DOWNLIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 30°	<input type="radio"/> 60°	
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION **EVERCORE**

DRIVER OPTIONS **TRIDONIC / OSRAM / KEGU**

LED  220-240 V IP65 Bridgelux LIFUD

	W	LUM	CCT	BEAM	CRI
KT6594A	11	810	3000K	30°	80

TECH. DRAWING size in mm



RECESSED DOWNLIGHT



MULTIS SQUARE FAMILY FIXED RECESSED DOWNLIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION OSRAM

DRIVER OPTION AREEK / LIFUD

LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
KT6867	12	1080	3000K	36°	80

TECH. DRAWING size in mm

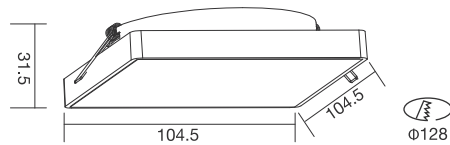

MULTIS ROUND FAMILY FIXED RECESSED DOWNLIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION OSRAM

DRIVER OPTION AREEK / LIFUD

LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
KT6796	12	1080	3000K	36°	80

TECH. DRAWING size in mm

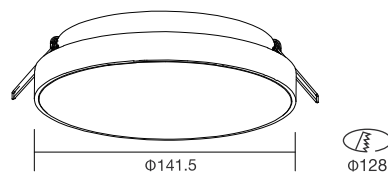

RECESSED DOWNLIGHT



LED  220-240 V  IP20  Bridgelux  KEGU

	W	LUM	CCT	BEAM	CRI
KT6644-1	8	640	3000K	35°	80

KT6644-1- TILTABLE & ROTATABLE


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION **CITIZEN / EVERCORE**

DRIVER OPTION **OSRAM / AREEK / LIFUD / HEP**

TECH. DRAWING size in mm



LED  220-240 V  IP20  Bridgelux  KEGU

	W	LUM	CCT	BEAM	CRI
KT6644-2	2x8	2x640	3000K	35°	80

KT6644-2- TILTABLE & ROTATABLE


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION **CITIZEN / EVERCORE**

DRIVER OPTION **OSRAM / AREEK / LIFUD / HEP**

TECH. DRAWING size in mm

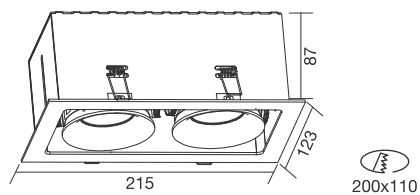

RECESSED DOWNLIGHT



LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
KT6644-2	2x8	2x640	3000K	35°	80

KT6645-2- TILTABLE & ROTATABLE


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION CITIZEN / EVERCORE

DRIVER OPTION OSRAM / AREEK / LIFUD / HEP

TECH. DRAWING size in mm

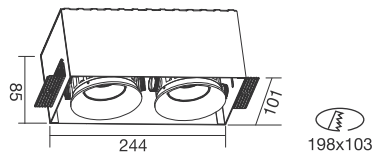

LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
KT6644-3	3x8	3x640	3000K	35°	80

KT6645-3- TILTABLE & ROTATABLE


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION CITIZEN / EVERCORE

DRIVER OPTION OSRAM / AREEK / LIFUD / HEP

TECH. DRAWING size in mm

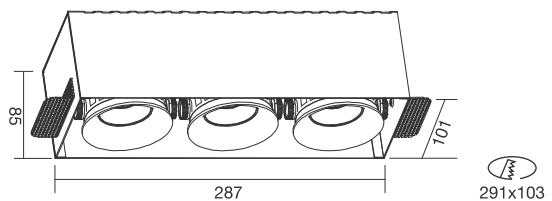

RECESSED DOWNLIGHT



KT6656 - FIXED DOWNLIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION **CITIZEN / EVERCORE**

DRIVER OPTION **OSRAM / AREEK / LIFUD / HEP**

LED 220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
KT6656	8	640	3000K	35°	80

TECH. DRAWING size in mm



KT6657 - TILTABLE DOWNLIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION **CITIZEN / EVERCORE**

DRIVER OPTION **OSRAM / AREEK / LIFUD / HEP**

LED 220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
KT6657	8	640	3000K	35°	80

TECH. DRAWING size in mm

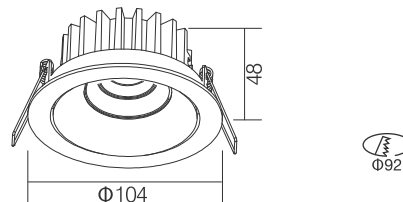

RECESSED DOWNLIGHT



LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
KT6659-1	8	640	3000K	30°	80

SARDINE FAMILY - TILTABLE


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 30° 60°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION **EVERCORE**

DRIVER OPTION **LIFUD / TRIDONIC / OSRAM / AREEK**

TECH. DRAWING size in mm



LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
KT6659-1	2x8	2x640	3000K	30°	80

SARDINE FAMILY - TILTABLE


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 30° 60°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION **EVERCORE**

DRIVER OPTION **LIFUD / TRIDONIC / OSRAM / AREEK**

TECH. DRAWING size in mm

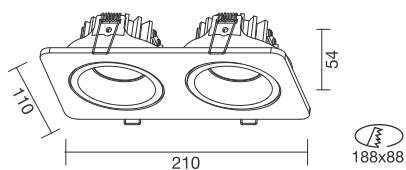

RECESSED DOWNLIGHT



DRUM FAMILY- TILTABLE & ROTATABLE

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 13°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION /


DRIVER OPTION

AREEK / LIFUD

LED  220-240 V IP20 CITIZEN OSRAM

TECH. DRAWING size in mm

	W	LUM	CCT	BEAM	CRI
KT6679-1	47	3400	3000K	36°	80

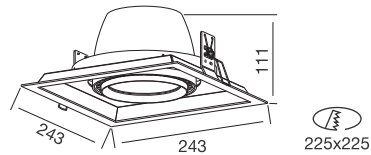

DRUM FAMILY- TILTABLE & ROTATABLE

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 13°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION /


DRIVER OPTION

AREEK / LIFUD

LED  220-240 V IP20 CITIZEN OSRAM

TECH. DRAWING size in mm

	W	LUM	CCT	BEAM	CRI
KT6679-2	2x47	2x3400	3000K	36°	80

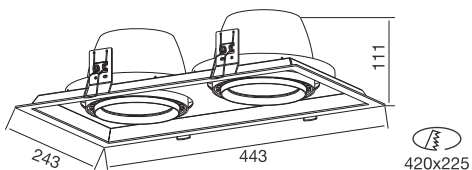

RECESSED DOWNLIGHT



LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
KT6696	40	3200	3000K	25°	80

CONE FAMILY - FIXED DOWNLIGHT


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION OSRAM

DRIVER OPTION OSRAM / LIFUD / TRIDONIC / AREEK

TECH. DRAWING size in mm



LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
KT6697	40	3200	3000K	25°	80

CONE FAMILY - FIXED DOWNLIGHT


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION OSRAM

DRIVER OPTION OSRAM / LIFUD / TRIDONIC / AREEK

TECH. DRAWING size in mm



RECESSED DOWNLIGHT



LED  220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI
KT6986	32	3000	3000K	38°	80

TAURUS FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38° <input type="radio"/> 55°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **Bridgelux / TRIDONIC / EVERCORE**

DRIVER OPTION **TRIDONIC / KEGU / LIFUD**

TECH. DRAWING size in mm



LED  220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI
KT6987	32	3000	3000K	38°	80

TAURUS FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38° <input type="radio"/> 55°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **Bridgelux / TRIDONIC / EVERCORE**

DRIVER OPTIONS **TRIDONIC / KEGU / LIFUD**

TECH. DRAWING size in mm



RECESSED DOWNLIGHT



TAURUS FAMILY- TILTABLE & ROTATABLE

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38°	<input type="radio"/> 55°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION **Bridgelux / TRIDONIC / EVERCORE**

DRIVER OPTION **TRIDONIC / KEGU / LIFUD**

LED  220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI
KT6988	2x32	2x3000	3000K	38°	80

TECH. DRAWING size in mm

