



KT6596A



LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	520 LM
CCT	3000K
CRI	> 80
Beam Angle	30 °/ 60 °

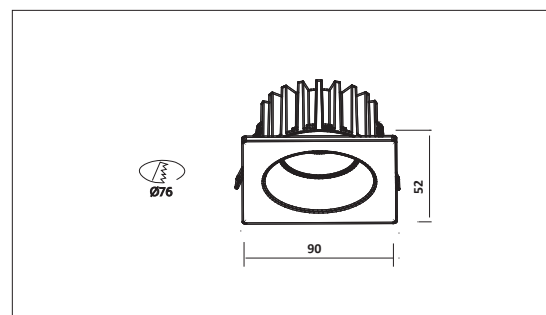

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

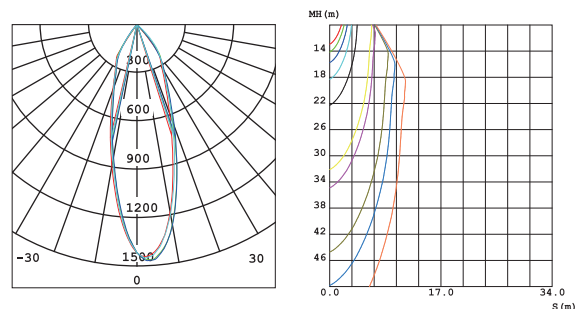

PACKING

Box size:	16.5 x 11.5 x 6 cm
Carton size:	36 x 33 x 26 cm
Pcs per carton:	24 pcs
Each carton :	0.032 m ³




KT6594A

LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	520 LM
CCT	3000K
CRI	> 80
Beam Angle	30 °/ 60 °




Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	16.5 x 11.5 x 6 cm
Carton size:	36 x 33 x 26 cm
Pcs per carton:	24 pcs
Each carton :	0.032 m ³

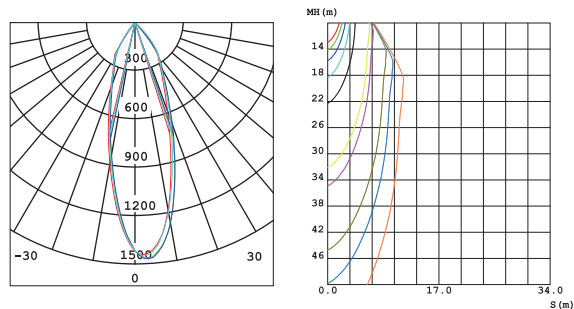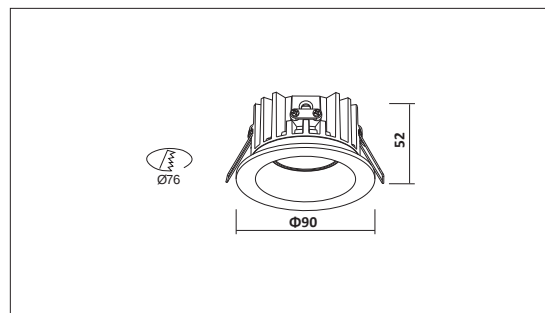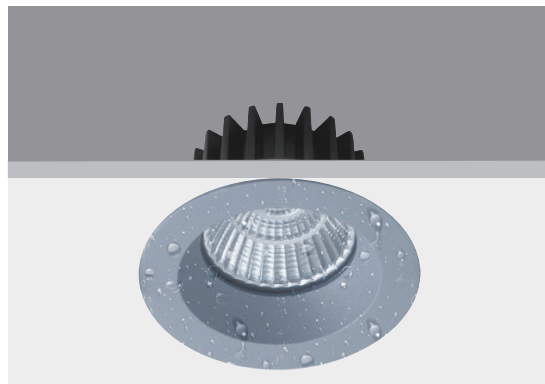

KT6596

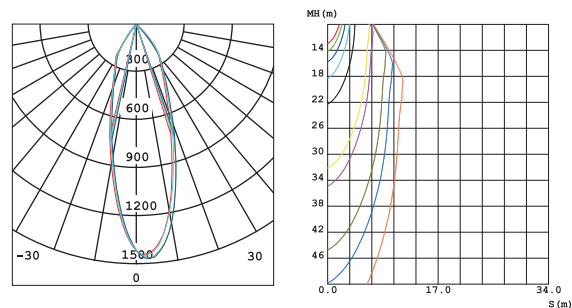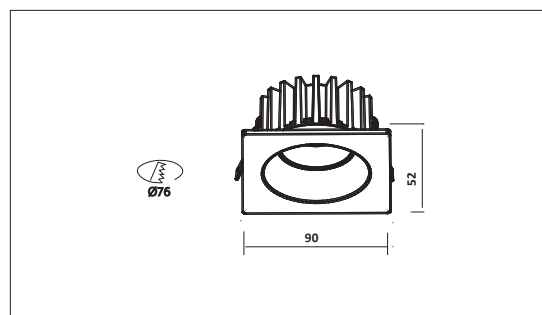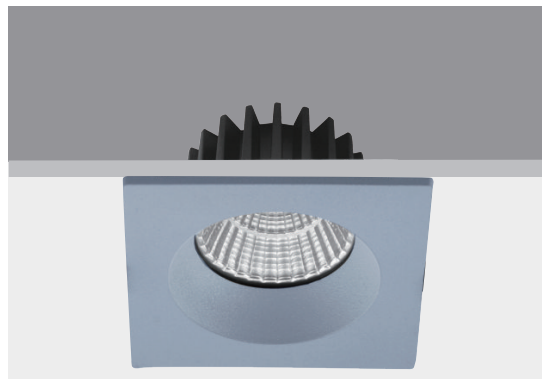


LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	16.5 x 11.5 x 6 cm
Carton size:	36 x 33 x 26 cm
Pcs per carton:	24 pcs
Each carton :	0.032 m ³

KT6594

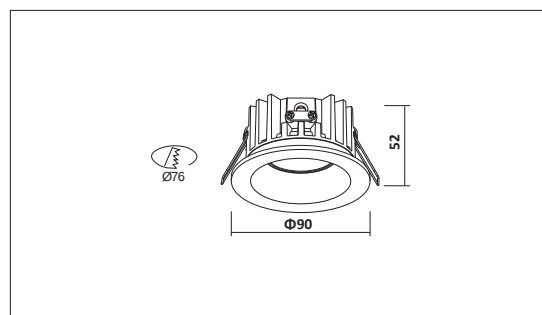


LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	16.5 x 11.5 x 6 cm
Carton size:	36 x 33 x 26 cm
Pcs per carton:	24 pcs
Each carton :	0.032 m ³

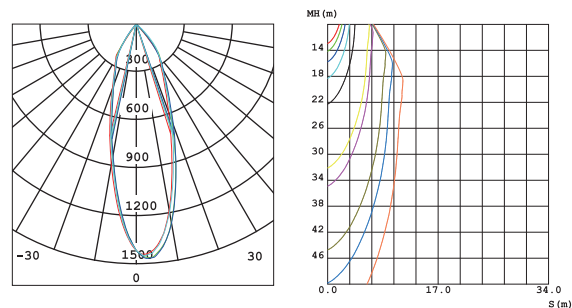

KT6659-1





LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	15 x 14 x 10.5 cm
Carton size:	43.5 x 31.5 x 44 cm
Pcs per carton:	24 pcs
Each carton :	0.06 m ³

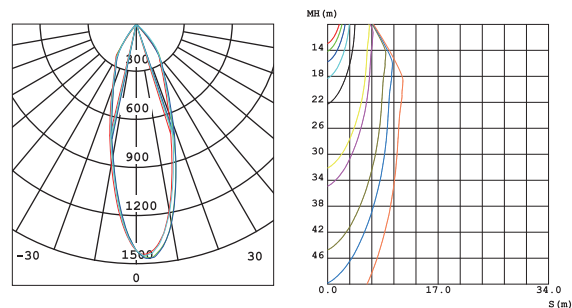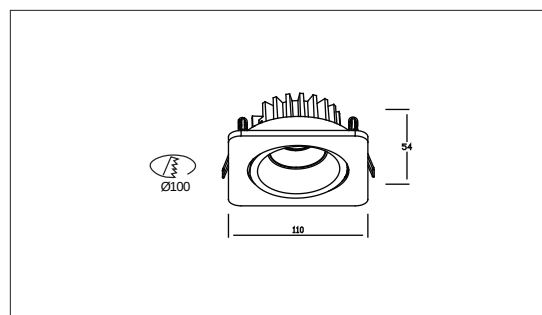

KT6659-2





LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	2 x 6 W
Driver Current	330 mA
Total Power	2 x 7.5 W
Luminous Flux	1130 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	25 x 15 x 9.5 cm
Carton size:	51.5 x 46.5 x 40 cm
Pcs per carton:	24 pcs
Each carton :	0.096 m ³

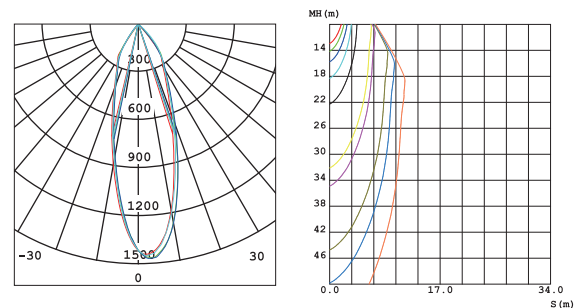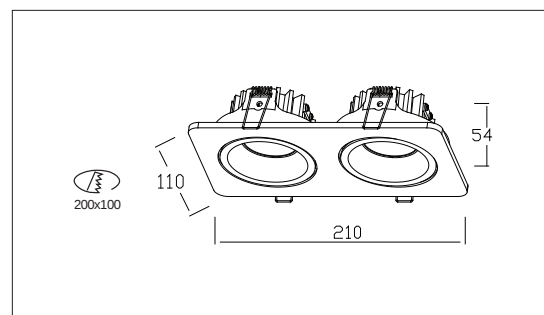

KT6648-1





LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	17x14x8.5 cm
Carton size:	43.5x36.5x36 cm
Pcs per carton:	12 Pcs
Each carton :	0.057 m ³

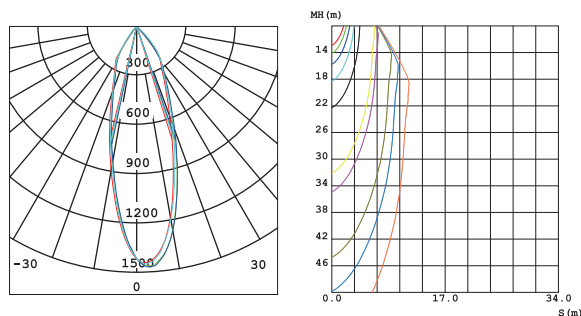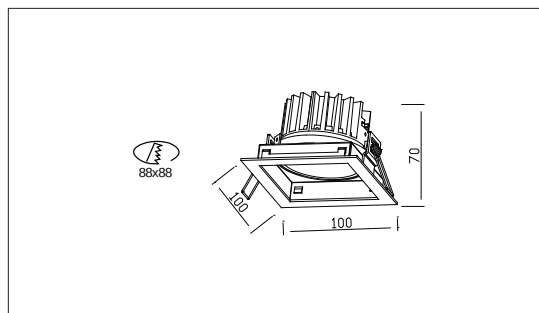

KT6648-2





LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	2 x 6 W
Driver Current	330 mA
Total Power	2x7.5 W
Luminous Flux	1130 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	26.5x12.5x8.5 cm
Carton size:	39x27.5x36.5 cm
Pcs per carton:	12 Pcs
Each carton :	0.039m ³

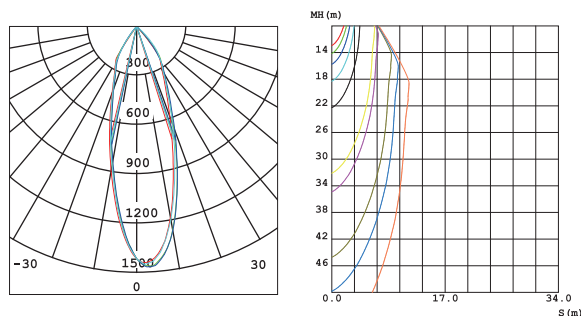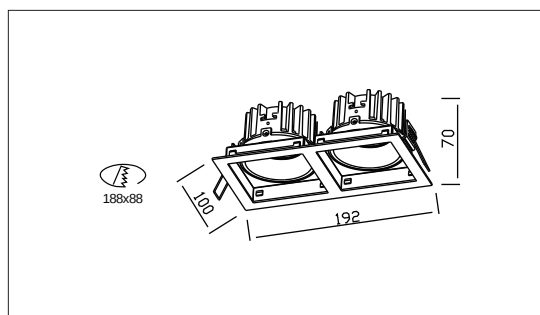

KT6647-1

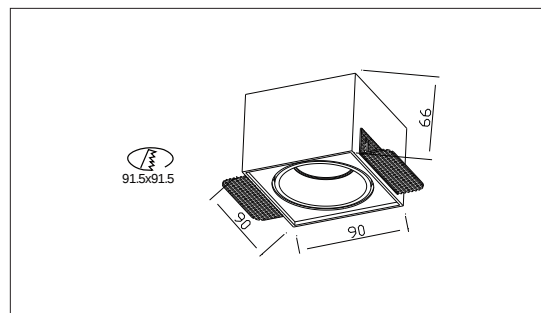

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 6 W

Driver Current 330 mA

Total Power 7.5 W

Luminous Flux 610 LM

CCT 3000 K

CRI > 80

Beam Angle 30 °/ 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium +Steel


Surface Finish: White, Grey, Black powder coating

Adjustable : Gimbal

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

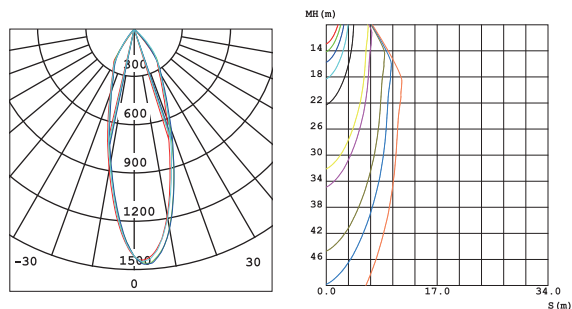

PACKING

Box size: 16.5x14x10.5cm

Carton size: 43.5x34.5x22.5cm

Pcs per carton: 12 pcs

Each carton : 0.034 m³

KT6647-2





LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	2 x 6 W
Driver Current	330mA
Total Power	2 x 7.5 W
Luminous Flux	1130 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °



Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	26 x 14 x 10.5 cm
Carton size:	29.5 x 27 x 44 cm
Pcs per carton:	8 pcs
Each carton :	0.035 m ³

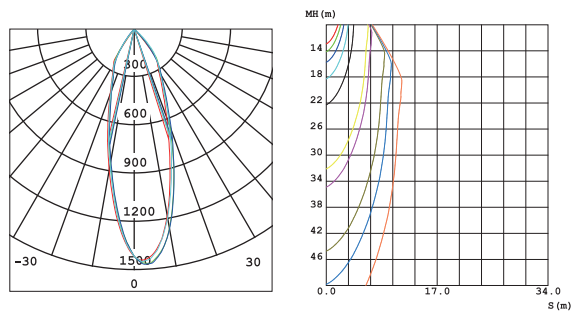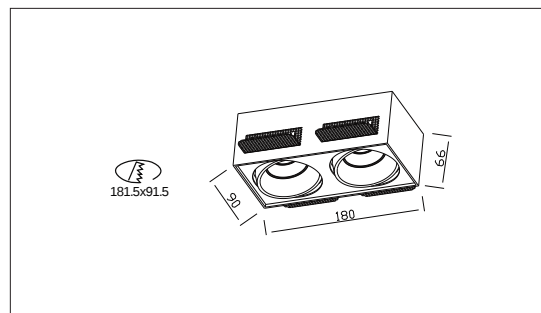

KT16F-LED-1

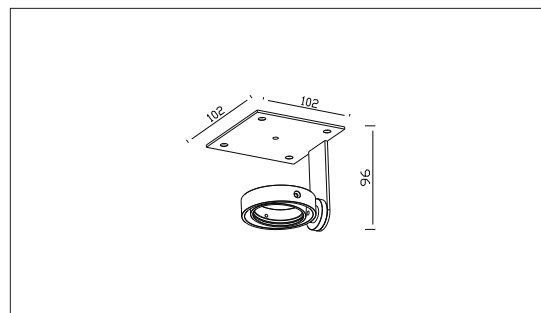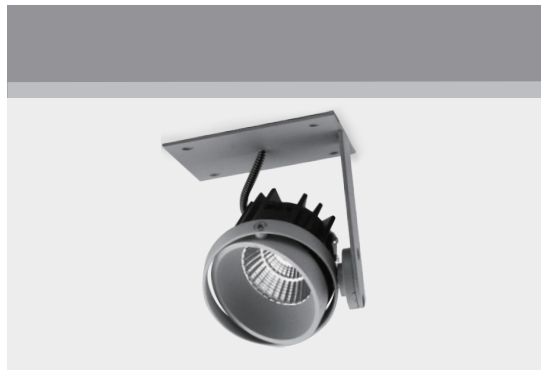


LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °



Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	14x13x14 cm
Carton size:	40.5x29.5x29.5cm
Pcs per carton:	12 pcs
Each carton :	0.035 m3

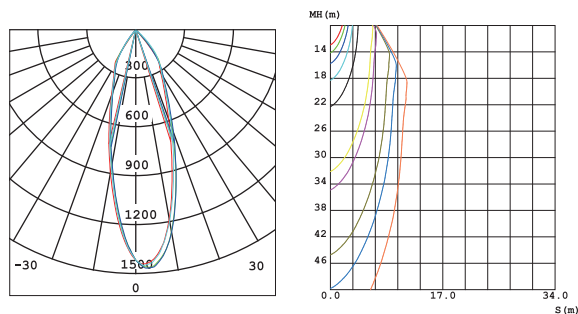

KT16F-LED-2

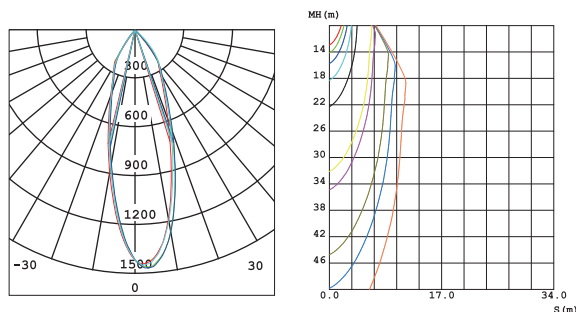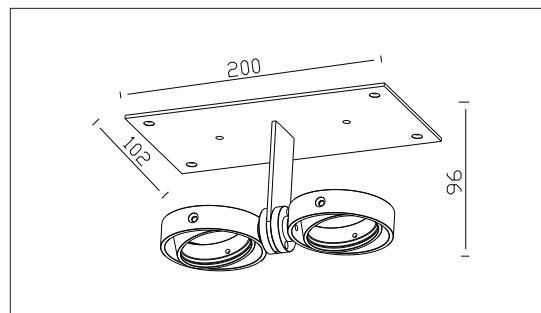


LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	2 x 6 W
Driver Current	330 mA
Total Power	2 x 7.5 W
Luminous Flux	1130 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	23 x 13 x 14 cm
Carton size:	47.5 x 27.5 x 29.5 cm
Pcs per carton:	8 pcs
Each carton :	0.038 m ³

KT16F-LED-3

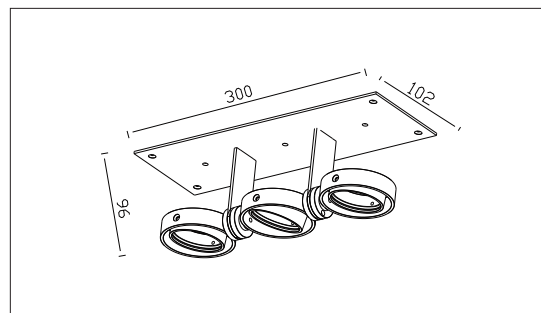


LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	3 x 6 W
Driver Current	330 mA
Total Power	3 x 7.5 W
Luminous Flux	1650 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING



Box size:	33 x 13 x 14 cm
Carton size:	34 x 27.5 x 29.5 cm
Pcs per carton:	4 pcs
Each carton :	0.027 m ³

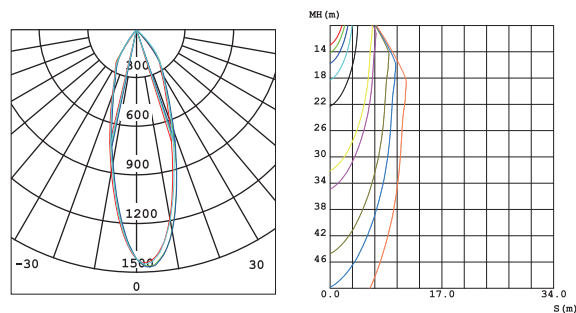

KT6554



LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

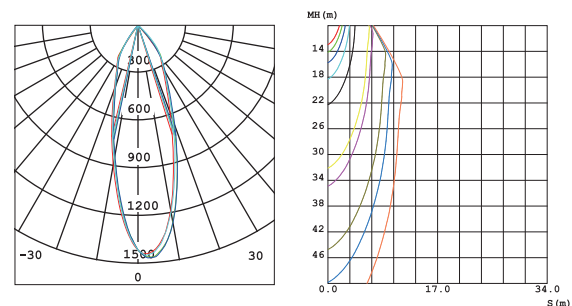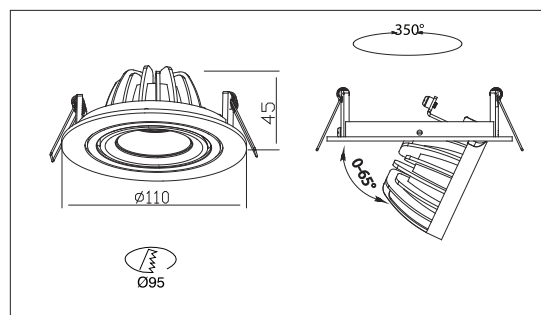

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector


PACKING

Box size:	18 x 13.5 x 5.5 cm
Carton size:	37.5 x 29.5 x 42.5cm
Pcs per carton:	30pcs
Each carton :	0.047m ³


KT6662



LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

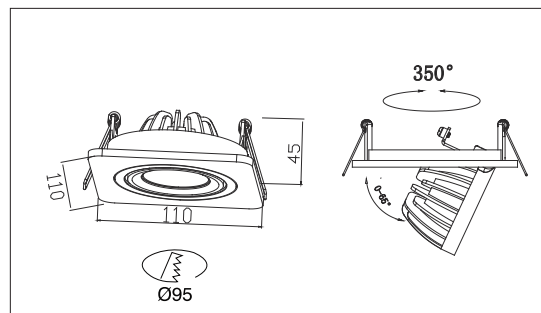


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

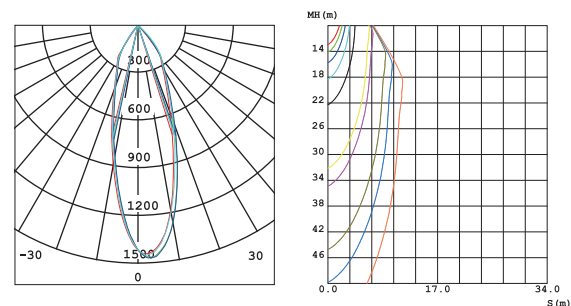

PACKING

Box size:	18 x 13.5 x 5.5 cm
Carton size:	37.5 x 29.5 x 42.5cm
Pcs per carton:	30pcs
Each carton :	0.047m ³

KT6595

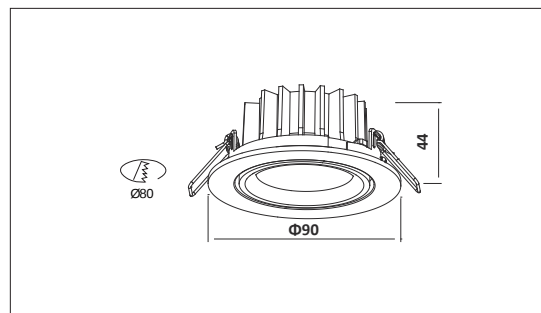


LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	16.5 x 11.5 x 6 cm
Carton size:	36 x 33 x 26 cm
Pcs per carton:	24 pcs
Each carton :	0.032 m ³

KT6814-1

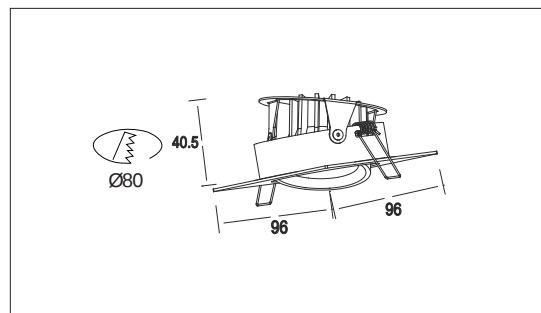


LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	16.5 x 11.5 x 6 cm
Carton size:	36 x 33 x 26 cm
Pcs per carton:	24 pcs
Each carton :	0.032 m ³

KT6595

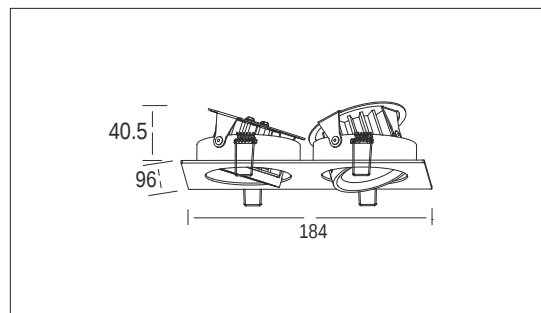

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 2 x 6 W

Driver Current 330 mA

Total Power 2 x 7.5 W

Luminous Flux 1130 LM

CCT 3000 K

CRI > 80

Beam Angle 30 °/ 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium +Steel

Surface Finish: White, Grey, Black powder coating

Adjustable : Gimbal

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

PACKING



Box size: 16.5 x 11.5 x 6 cm

Carton size: 36 x 33 x 26 cm

Pcs per carton: 24 pcs

Each carton : 0.032 m³

KT6550

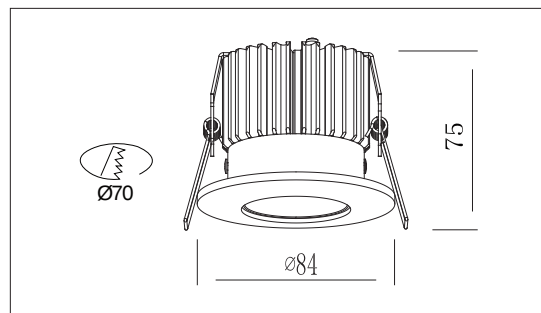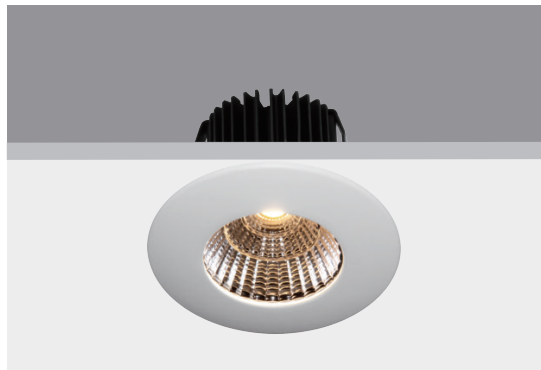

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 6 W

Driver Current 330 mA

Total Power 7.5 W

Luminous Flux 610 LM

CCT 3000 K

CRI > 80

Beam Angle 30 °/ 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating

Adjustable : Fixed

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

PACKING


Box size: 10.5 x 10.5 x 8 cm

Carton size: 33.5 x 22.5 x 43 cm

Pcs per carton: 30 pcs

Each carton : 0.033 m³

KT6551

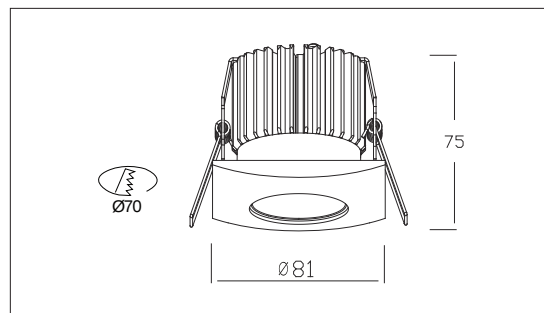

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 6 W

Driver Current 330 mA

Total Power 7.5 W

Luminous Flux 610 LM

CCT 3000 K

CRI > 80

Beam Angle 30 °/ 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating

Adjustable : Fixed

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

PACKING



Box size: 12 x 10 x 8 cm

Carton size: 32 x 25.5 x 43 cm

Pcs per carton: 30 pcs

Each carton : 0.035 m³

KT6553

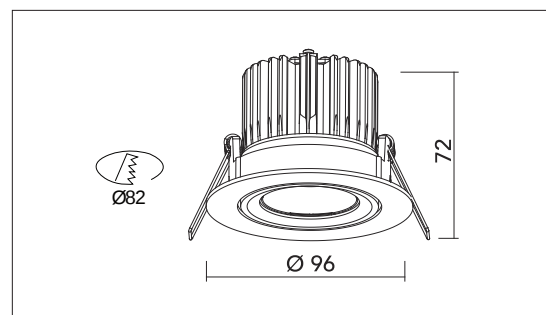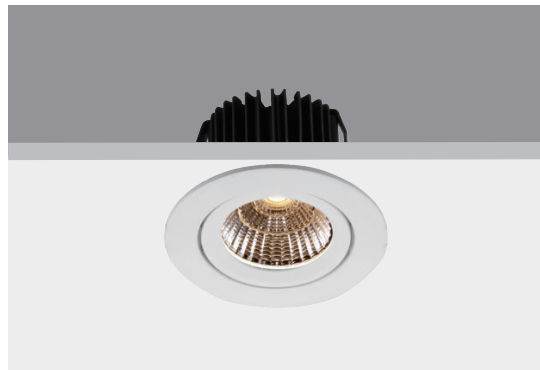



LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	10 x 10 x 11.5 cm
Carton size:	42 x 21.5 x 37.5 cm
Pcs per carton:	30 pcs
Each carton :	0.034 m ³

KT6560-1

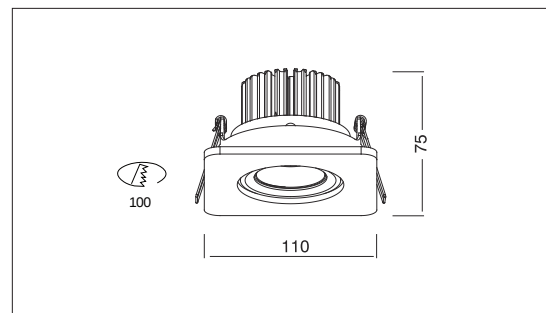
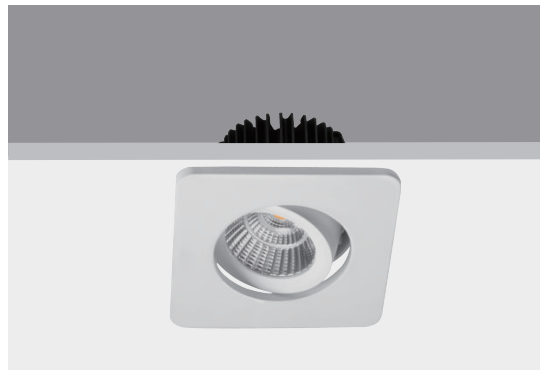


LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	15 x 14 x 10.5 cm
Carton size:	43.5 x 31.5 x 44 cm
Pcs per carton:	24 pcs
Each carton :	0.06 m ³

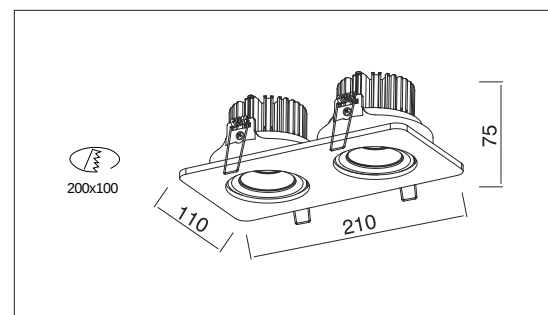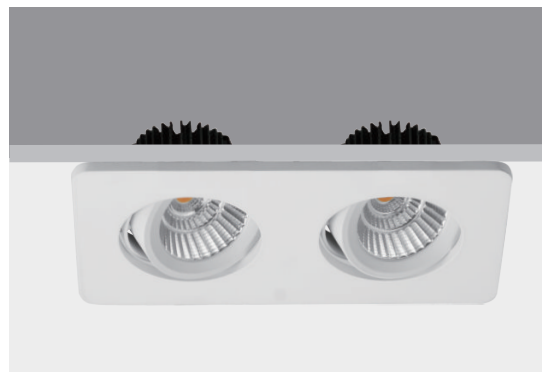



LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	2 x 6 W
Driver Current	330 mA
Total Power	2 x 7.5 W
Luminous Flux	1130 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	26.5 x 15 x 9.5 cm
Carton size:	54.5 x 46.5 x 40 cm
Pcs per carton:	24 pcs
Each carton :	0.1 m ³

KT6577

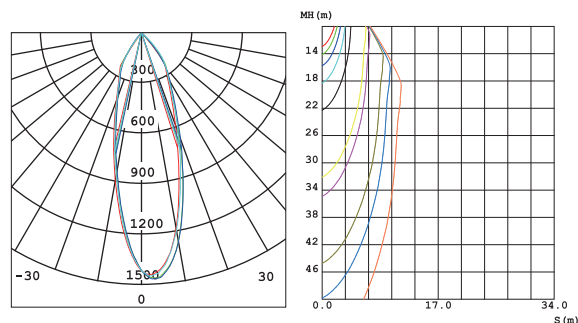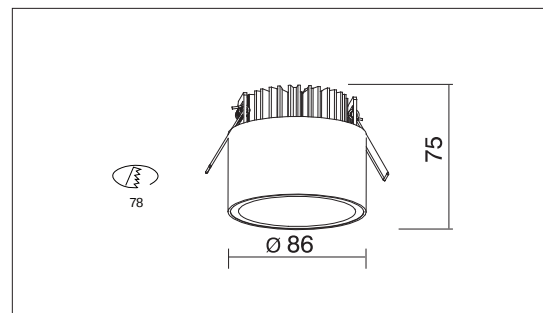

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 6 W

Driver Current 330 mA

Total Power 7.5 W

Luminous Flux 610 LM

CCT 3000 K

CRI > 80

Beam Angle 30 °/ 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating

Adjustable : Fixed

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

PACKING




Box size: 12.5 x 12.5 x 10.5 cm

Carton size: 52.5 x 26.5 x 33.5 cm

Pcs per carton: 24 pcs

Each carton : 0.046 m³

KT6578

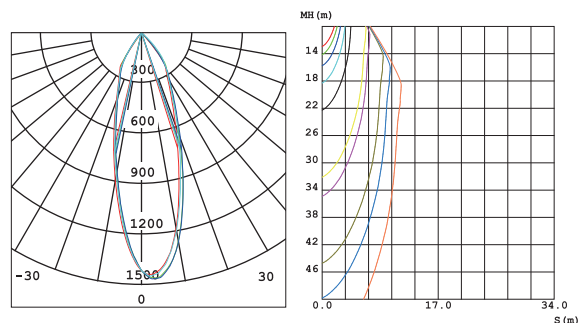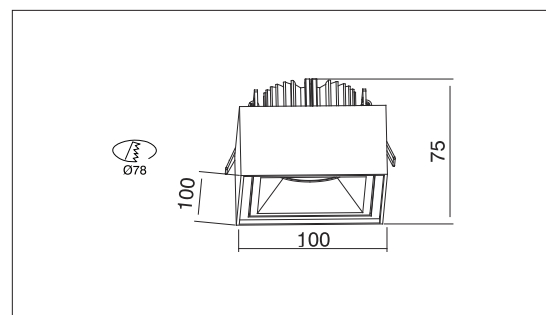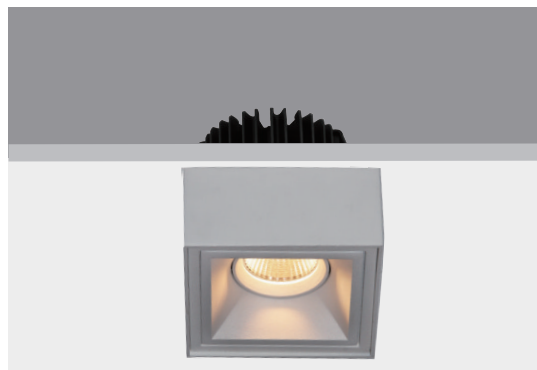

LED Brand: Bridgelux V8 BXRE-30E0800

Driver: AK-10W-36330-D5

LED Power: 6 W

Driver Current: 330 mA

Total Power: 7.5 W

Luminous Flux: 610 LM

CCT: 3000 K

CRI: > 80

Beam Angle: 30 °/ 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating

Adjustable : Fixed

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

PACKING




Box size: 13 x 13 x 10.5 cm

Carton size: 54 x 27.5 x 33.5 cm

Pcs per carton: 24 pcs

Each carton : 0.049 m³

KT6821

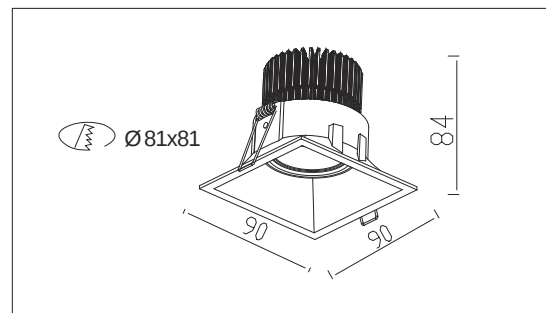

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-24500-D5

LED Power 8 W

Driver Current 500 mA

Total Power 11 W

Luminous Flux 870 LM

CCT 3000 K

CRI > 80

Beam Angle 15 °/ 36 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating

Adjustable : Tiltable

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

MOQ: 216 pcs

PACKING


Box size: 13 x 13 x 10.5 cm

Carton size: 54 x 27.5 x 33.5 cm

Pcs per carton: 24 pcs

Each carton : 0.049 m³

KT6822

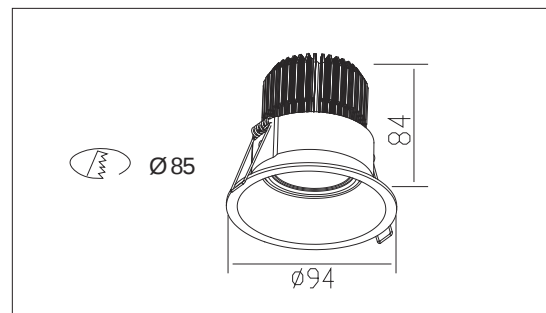

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-24500-D5

LED Power 8 W

Driver Current 500 mA

Total Power 11 W

Luminous Flux 870 LM

CCT 3000 K

CRI > 80

Beam Angle 15 °/ 36 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating



Adjustable : Tilttable

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

MOQ: 216 pcs



PACKING

Box size: 13 x 13 x 10.5 cm


Carton size: 54 x 27.5 x 33.5 cm

Pcs per carton: 24 pcs

Each carton : 0.049 m³

KT6564A

KT6565A



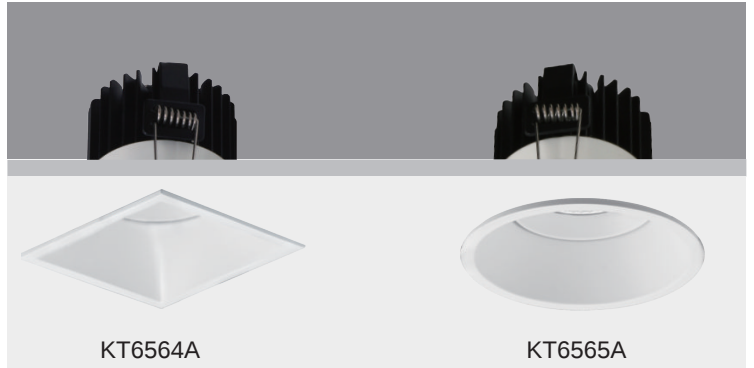


KT6564A

KT6565A

LED Brand	Nichia
LED Power	6 W
Driver	AK-10W-36330-D5
Total Power	8 W
Driver Current	330 mA
Luminous Flux	440 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	84 °
Input:	110-230 V AC 50 Hz

Main Material:	Aluminium + Steel
Surface Finish:	White, Black,Grey
Adjustable :	Fixed
Installation by:	Single Acticon Spring
Wiring:	W/wire
Optics:	Optical diffuser panel

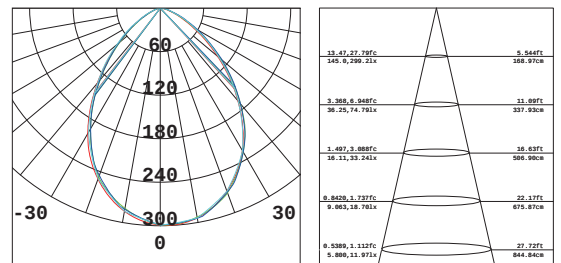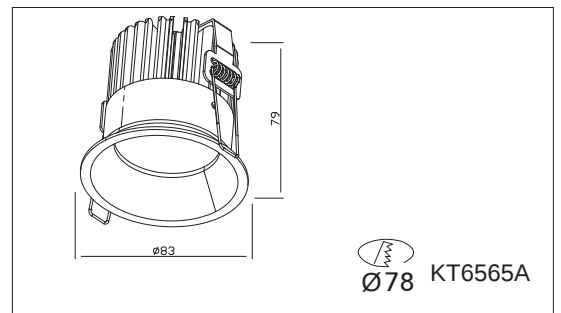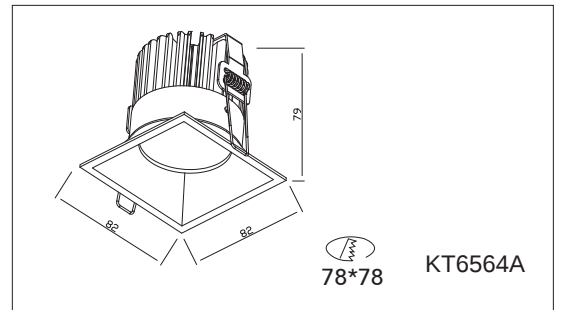


PACKING

Box size:	16 x 11.5 x 9.5 cm
Carton size:	36 x 33.5 x 43 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m³

KT6564

KT6565

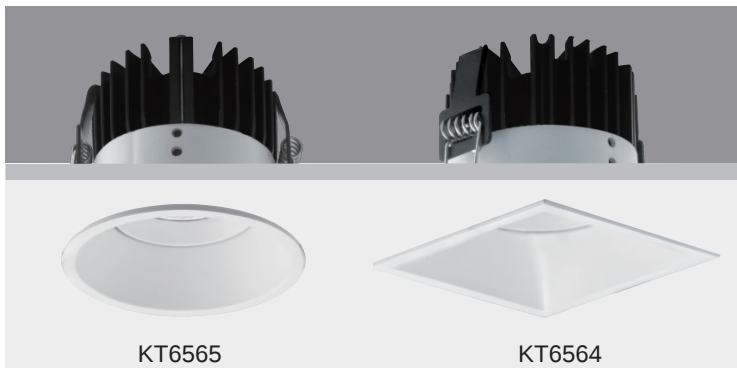

KT6565


KT6564

LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000K
CRI	> 80
Beam Angle	30 °/ 60 °
Input:	110-230V AC 50/60Hz


Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING



Box size:	16 x 11.5 x 9.5 cm
Carton size:	36 x 33.5 x 43 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m ³

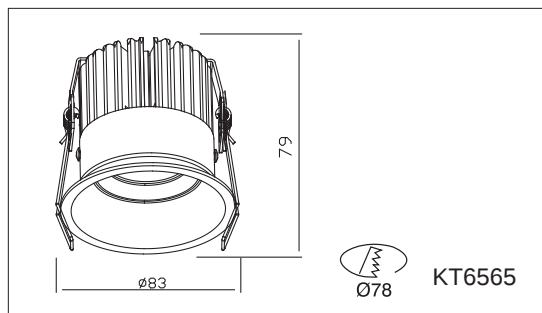


KT6565

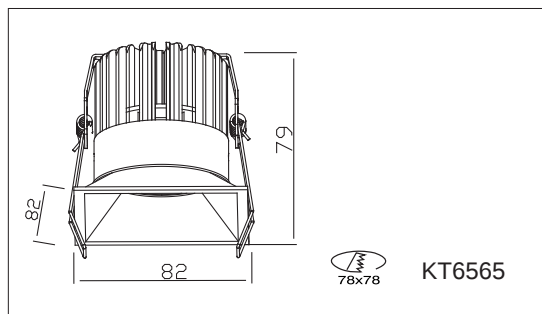

KT6565



KT6657

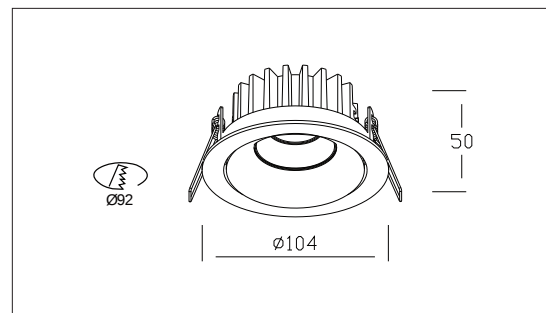

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 6 W

Driver Current 330 mA

Total Power 7.5 W

Luminous Flux 610 LM

CCT 3000 K

CRI > 80

Beam Angle 30 ° / 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating


Adjustable : Gimbal

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

MOQ: 216 pcs

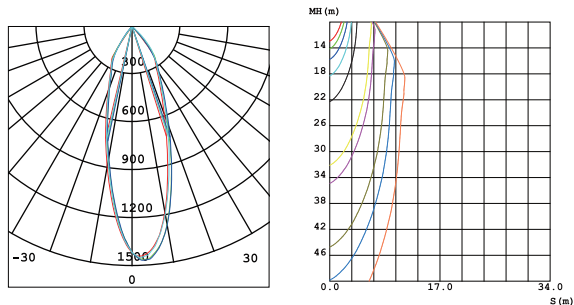

PACKING



Box size: 17 x 12.5 x 6 cm

Carton size: 39 x 35.5 x 26.5 cm

Pcs per carton: 24 pcs

Each carton : 0.037 m³

KT6656

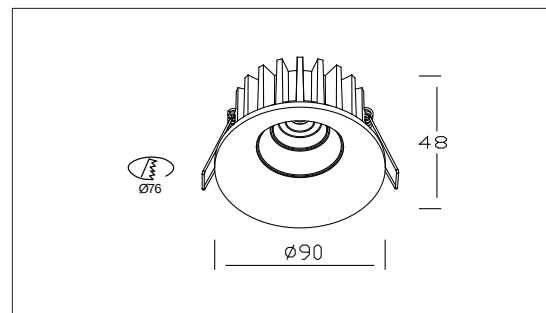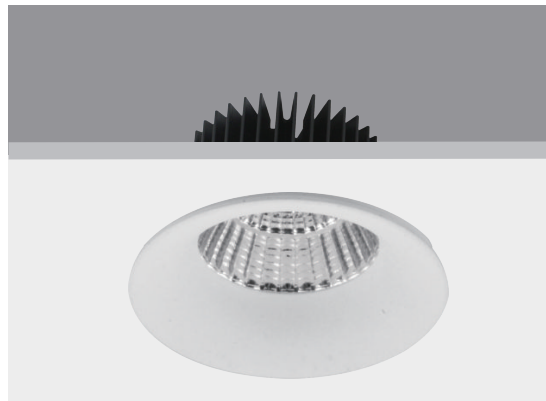

LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 6 W

Driver Current 330 mA

Total Power 7.5 W

Luminous Flux 604 LM

CCT 3000 K

CRI > 80

Beam Angle 30 ° / 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating



Adjustable : Gimbal

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector

MOQ: 216 pcs



PACKING

Box size: 16 x 11.5 x 6 cm

Carton size: 36 x 33.5 x 26.5 cm

Pcs per carton: 24 pcs

Each carton : 0.032 m³

KT6658-1 KT6658-2



LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 6 W 2 x 6 W

Driver Current 330 mA 330 mA

Total Power 7.5 W 2 x 7.5 W

Luminous Flux 610 LM 1130 LM

CCT 3000 K

CRI > 80

Beam Angle 30 °/ 60 °

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating



Adjustable : Gimbal

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector



MOQ: 216 pcs

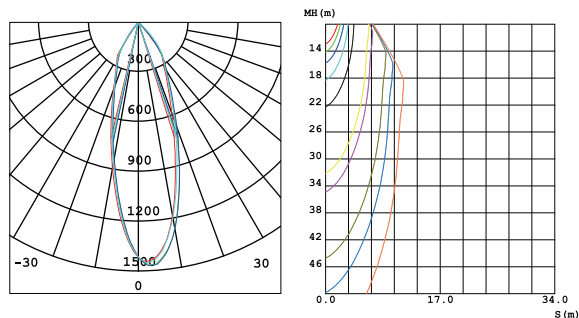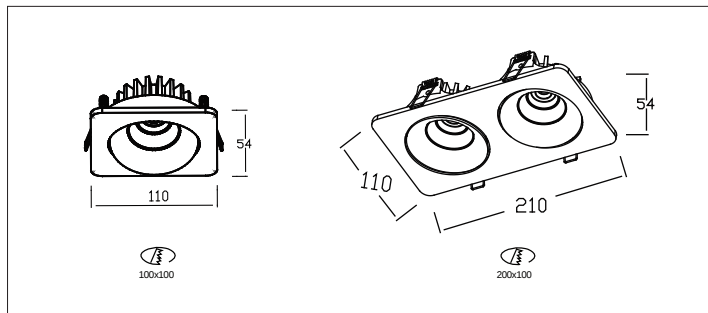

PACKING


	KT6658-1	KT6658-2
Box size:	15 x 14 x 10.5 cm	25 x 15 x 9.5 cm
Carton size:	43.5 x 31.5 x 44 cm	51.5 x 46.5 x 40 cm
Pcs per carton:	24 pcs	24 pcs
Each carton :	0.06 m ³	0.096 m ³

KT6644-3 KT6644-2 KT6644-1

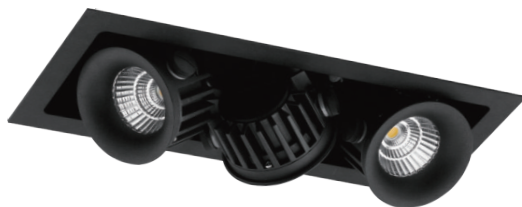


KT6644-3

293x107



KT6644-2

200x107



KT6644-1

107x107



ITEM	KT6644-1	KT6644-2	KT6644-3
LED Brand	Bridgelux V8 BXRE-30E800		
LED Power	6 W	2x6 W	3x6 W
Driver	AK-10W-36330-D5		
Driver Current	350mA		
Total Power	7.5W	2x7.5 W	3x7.5W
Luminous Flux	510 LM	1050 LM	1450 LM
CCT	3000 K		
CRI	> 80		
Beam Angle	30 ° / 60 °		

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs


PACKING

	KT6644-1	KT6644-2	KT6644-3
Box size:	16.5x14x10.5cm	26x14x10.5cm	37x14x10.5cm
Carton size:	43.5x34.5x22.5cm	29.5x27x44cm	38x29.5x33.5cm
Pcs per carton:	12 pcs	8 pcs	6 pcs
Each carton :	0.034 m ³	0.035 m ³	0.038 m ³


Bridgelux V8 6.2 W




KT6645-3 KT6645-2 KT6645-1



KT6645-3



KT6645-2



KT6645-1



ITEM	KT6644-1 KT6644-2 KT6644-3		
LED Brand	Bridgelux V8 BXRE-30E800		
LED Power	6 W	2x6 W	3x6 W
Driver	AK-10W-36330-D5		
Driver Current	350mA		
Total Power	7.5W	2x7.5 W	3x7.5W
Luminous Flux	510 LM	1050 LM	1450 LM
CCT	3000 K		
CRI	> 80		
Beam Angle	30 ° / 60 °		

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs


PACKING

	KT6644-1	KT6644-2	KT6644-3
Box size:	16.5x14x10.5cm	26x14x10.5cm	37x14x10.5cm
Carton size:	43.5x34.5x22.5cm	29.5x27x44cm	38x29.5x33.5cm
Pcs per carton:	12 pcs	8 pcs	6 pcs
Each carton :	0.034 m ³	0.035 m ³	0.038 m ³

Bridgelux V8 6.2 W



KT6309

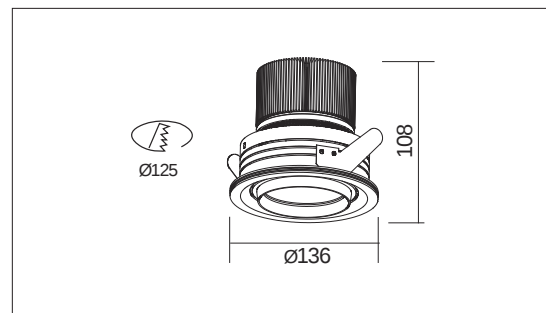



LED Brand	Bridgelux V10 BXRE-30E1000	
Driver	AK-10W-36330-D5	KEP0902-500-D6
LED Power	9.5 W	13.5 W
Driver Current	350 mA	500 mA
Total Power	11.5 W	15.5 W
Luminous Flux	740 LM	1130 LM
CCT	3000 K	
CRI	≥ 80 / 90	
Beam Angle	18 ° / 20 °	

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs



PACKING

Box size:	14.5 x 14.5 x 12 cm
Carton size:	43.5 x 31 x 26.5 cm
Pcs per carton:	12 pcs
Each carton :	0.04 m ³



Bridgelux 9.5W



Bridgelux 13.6W



KT6327

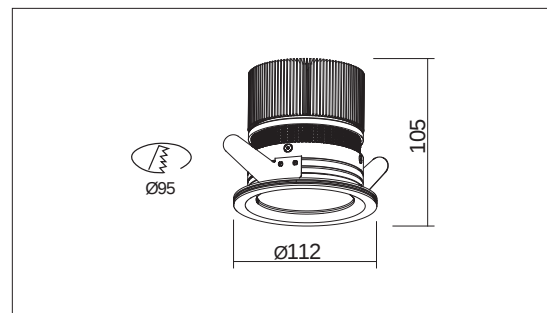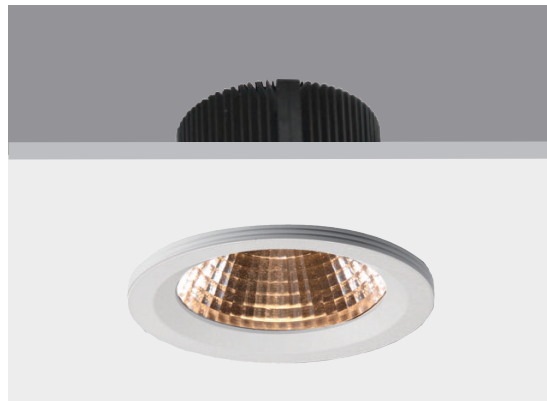


LED Brand	Bridgelux V10 BXRE-30E1000	
Driver	AK-10W-36330-D5	KEP0902-500-D6
LED Power	9.5 W	13.5 W
Driver Current	350 mA	500 mA
Total Power	11.5 W	15.5 W
Luminous Flux	740 LM	1130 LM
CCT	3000 K	
CRI	≥ 80 / 90	
Beam Angle	18 ° / 20 °	

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs

PACKING


Box size:	15 x 15 x 14.5 cm
Carton size:	47 x 31.5 x 45.5 cm
Pcs per carton:	18 pcs
Each carton :	0.067 m ³

Bridgelux 9.5W





E(1x)	h(m)	16.74 °	Ø(cm)
2229	1		29.43
557	2		58.86
247	3		88.29
193	4		117.72
89	5		147.15

Bridgelux 13.6W



E(1x)	h(m)	17.95 °	Ø(cm)
2926	1		31.59
732	2		63.18
325	3		94.77
183	4		126.37
117	5		157.96


KT6574

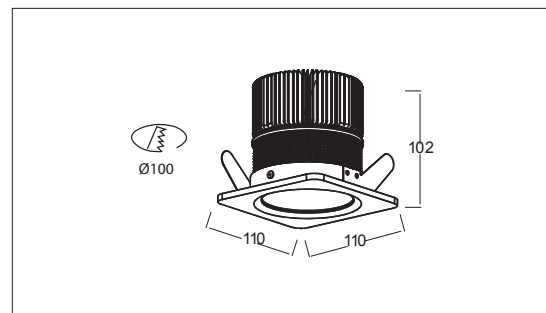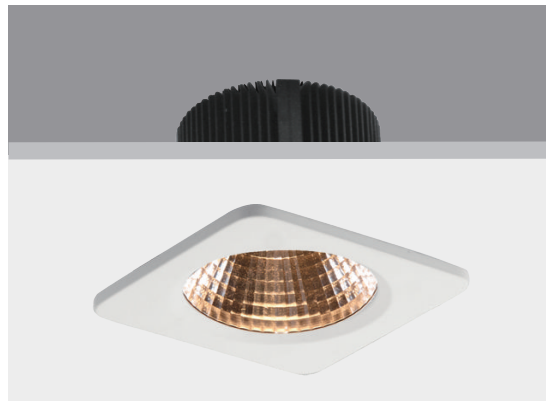

LED Brand	Bridgelux V10 BXRE-30E1000	
Driver	AK-10W-36330-D5	KEP0902-500-D6
LED Power	9.5 W	13.5 W
Driver Current	350 mA	500 mA
Total Power	11.5 W	15.5 W
Luminous Flux	740 LM	1130 LM
CCT	3000 K	
CRI	≥ 80 / 90	
Beam Angle	18 ° / 20 °	


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs

Bridgelux 9.5W



E (lx)	h (m)	16.74 °	Ø (cm)
2229	1		29.43
557	2		58.86
247	3		88.29
193	4		117.72
89	5		147.15

Bridgelux 13.6W




E (lx)	h (m)	17.95 °	Ø (cm)
2926	1		31.59
732	2		63.18
325	3		94.77
183	4		126.37
117	5		157.96

PACKING

Box size:	11.6 x 11.5 x 11 cm
Carton size:	36 x 24.5 x 46 cm
Pcs per carton:	24 pcs
Each carton :	0.041 m ³

KT6580

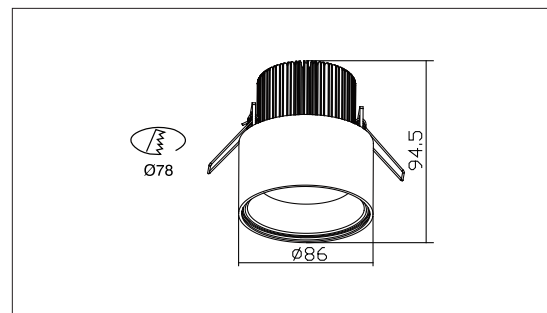


LED Brand	Bridgelux V10 BXRE-30E1000	
Driver	AK-10W-36330-D5	KEP0902-500-D6
LED Power	9.5 W	13.5 W
Driver Current	350 mA	500 mA
Total Power	11.5 W	15.5 W
Luminous Flux	740 LM	1130 LM
CCT	3000 K	
CRI	≥ 80 / 90	
Beam Angle	18 ° / 20 °	

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs

PACKING


Box size:	8.7 x 8.7 x 9.5 cm
Carton size:	35 x 19 x 26.5 cm
Pcs per carton:	24 pcs
Each carton :	0.052 m ³

Bridgelux 9.5W




E (lx)	h (m)	16.74 °	Ø (cm)
2229	1		29.43
557	2		58.86
247	3		88.29
193	4		117.72
89	5		147.15

Bridgelux 13.6W



E (lx)	h (m)	17.95 °	Ø (cm)
2926	1		31.59
732	2		63.18
325	3		94.77
183	4		126.37
117	5		157.96

KT6344-1

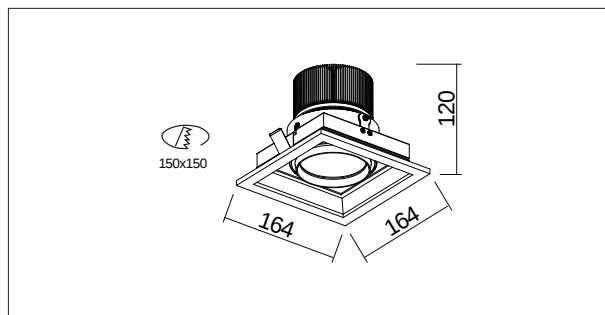


LED Brand	Bridgelux V10 BXRE-30E1000	
Driver	AK-10W-36330-D5	KEP0902-500-D6
LED Power	9.5 W	13.5 W
Driver Current	350 mA	500 mA
Total Power	11.5 W	15.5 W
Luminous Flux	740 LM	1130 LM
CCT	3000 K	
CRI	≥ 80 / 90	
Beam Angle	18 ° / 30 °	

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs

PACKING KT6344-1


Box size:	19.5 x 17 x 13.5 cm
Carton size:	40.5 x 35.5 x 42.5 cm
Pcs per carton:	12 pcs
Each carton :	0.061 m ³

Bridgelux 9.5W




E(1x)	h(m)	16.74 °	Ø(cm)
2229	1		29.43
557	2		58.86
247	3		88.29
193	4		117.72
89	5		147.15

Bridgelux 13.6W



E(1x)	h(m)	17.95 °	Ø(cm)
2926	1		31.59
732	2		63.18
325	3		94.77
183	4		126.37
117	5		157.96

KT6344-2

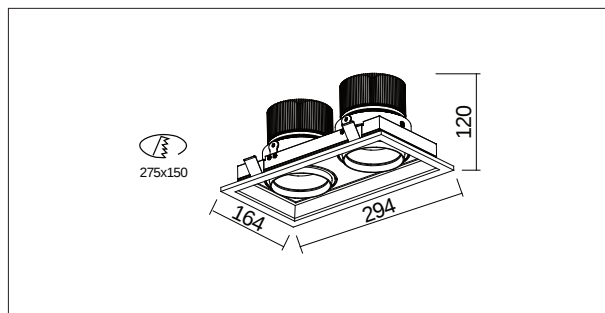


LED Brand	Bridgelux V10 BXRE-30E1000	
Driver	AK-10W-36330-D5	KEP0902-500-D6
LED Power	2 x 9.5 W	3 x 13.5 W
Driver Current	350 mA	500 mA
Total Power	2 x 11.5 W	2 x 15.5 W
Luminous Flux	1480 LM	2250 LM
CCT	3000 K	
CRI	≥ 80	
Beam Angle	18 °/ 30 °	

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs

PACKING KT6344-2


Box size:	30 x 19.5 x 13.5 cm
Carton size:	40.5 x 31.5 x 42.5 cm
Pcs per carton:	6 pcs
Each carton :	0.054 m ³

Bridgelux 9.5W



E(1x)	h(m)	16.74 °	Ø(cm)
2229	1		29.43
557	2		58.86
247	3		88.29
193	4		117.72
89	5		147.15

Bridgelux 13.6W



E(1x)	h(m)	17.95 °	Ø(cm)
2926	1		31.59
732	2		63.18
325	3		94.77
183	4		126.37
117	5		157.96

Change Mouldle




Lock

Change Mouldle


Recessed Downlight

In order to meet the diversified designs, Our series of LED DownLight specially develops multiple light source combination series products, custom-made on your design requirements. You can choose different applications, different light sources for mixed designs.

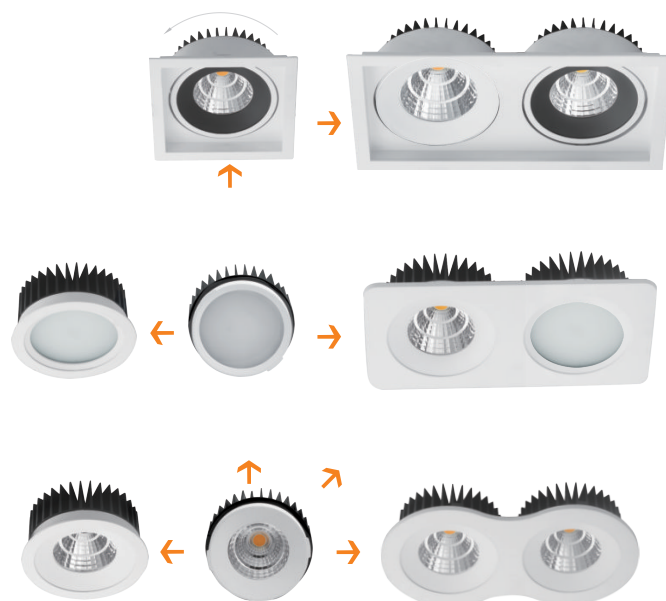


Input:	110-230V AC 50/60Hz
LED Power :	12 W
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	PC Metallized Reflector
MOQ	300 pcs


KT6583-1 KT6583-2

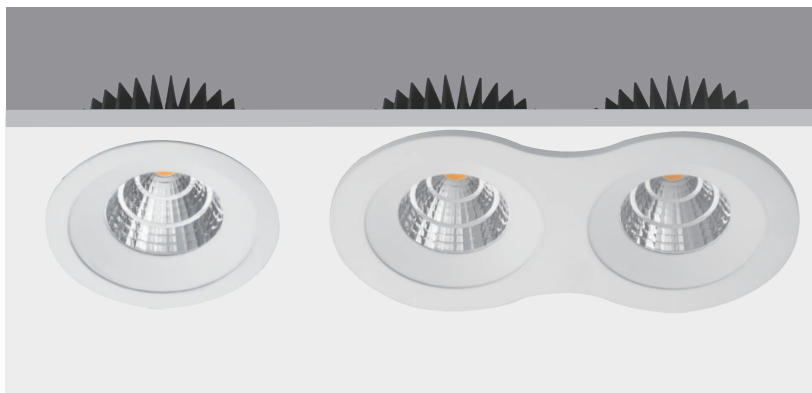

Item	KT6583-1		KT6583-2	
LED Brand	CITIZEN	CITIZEN	CITIZEN	CITIZEN
	CLL032-1205A5	CLU034-1206B8	CLL032-1205A5	CLU034-1206B8
		-303M1A2		-303M1A2
LED Power	12 W	22 W	2x12 W	2x22 W
Driver	AK-16W-60350-D6	LC 25W 600mA		LC 25W 600mA
Total Power	15 W	25 W	2x15 W	2x25 W
Driver Current	350mA	600mA	350mA	1200mA
Luminous Flux	1080 LM	1720 LM	2160 LM	3440 LM
CCT		3000K		
CRI		> 80		
Beam Angle		24 ° (17 ° / 60 °)		

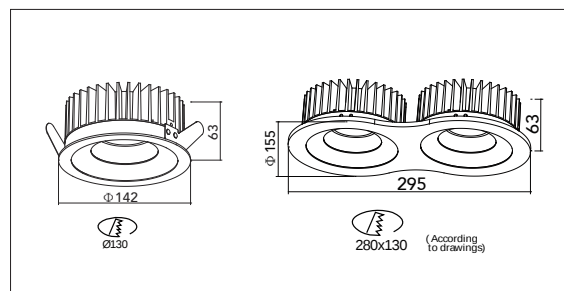

CITIZEN 12.3 W




E (lx)	h (m)	17.95 °	∅ (cm)
2926	1		31.59
732	2		63.18
325	3		94.77
183	4		126.37
117	5		157.96

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Leaf clip
Adjustable:	Fixed
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ:	108 pcs


PACKING

	KT6583-1	KT6583-2
Box size:	17.3 x 8 x 19.5 cm	20.5 x 9 x 35 cm
Carton size:	40.5 x 36.5 x 26 cm	42.5 x 36.5 x 38.5 cm
Pcs per carton:	12 pcs	8 pcs
Each carton :	0.038 m ³	0.06 m ³


KT6584-1 KT6584-2

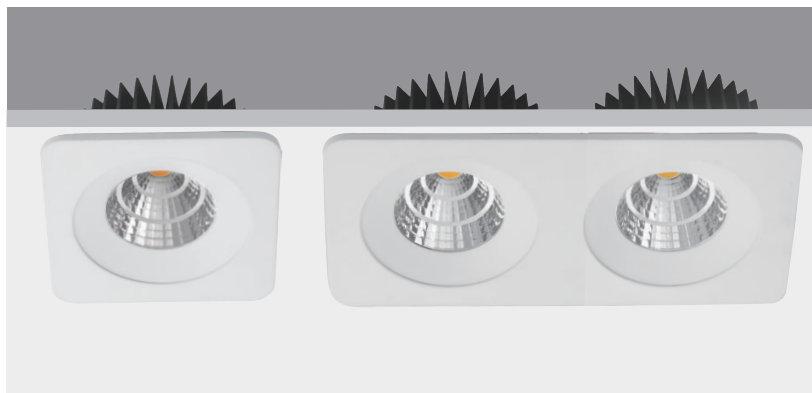

Item	KT6584-1		KT6584-2	
LED Brand	CITIZEN	CITIZEN	CITIZEN	CITIZEN
	CLL032-1205A5	CLU026-1205C	CLL032-1205A5	CLU026-1205C1
		-303M2G2		-303M2G2
LED Power	12 W	22 W	2x12 W	2x22 W
Driver	AK-16W-60350-D6	LC 25W 600mA		LC 25W 600mA
Total Power	15 W	25 W	2x15 W	2x25 W
Driver Current	350mA	600mA	350mA	1200mA
Luminous Flux	1080 LM	1720 LM	2160 LM	3440 LM
CRI		3000K		
CRI		> 80		
Beam Angle		24 ° (17 ° / 60 °)		

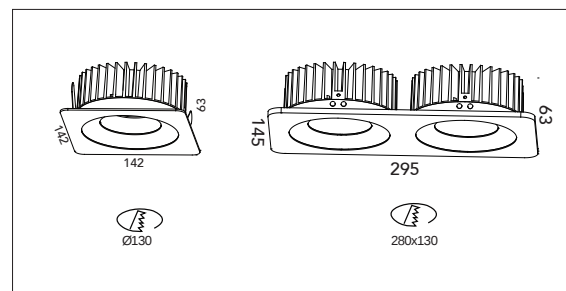

CITIZEN 12.3 W




E (lx)	h (m)	17.95	(cm)
2926	1	31.59	
732	2	63.18	
325	3	94.77	
183	4	126.37	
117	5	157.96	


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	108 pcs

PACKING	KT6584-1	KT6584-2
Box size	17.3 x 8 x 19.5 cm	20.5 x 9 x 35 cm
Carton size	40.5 x 36.5 x 26 cm	42.5 x 36.5 x 38.5 cm
Pcs per carton	12 pcs	8 pcs
Each carton	0,038 m3	0,06 m3


KT6585-1 KT6585-2

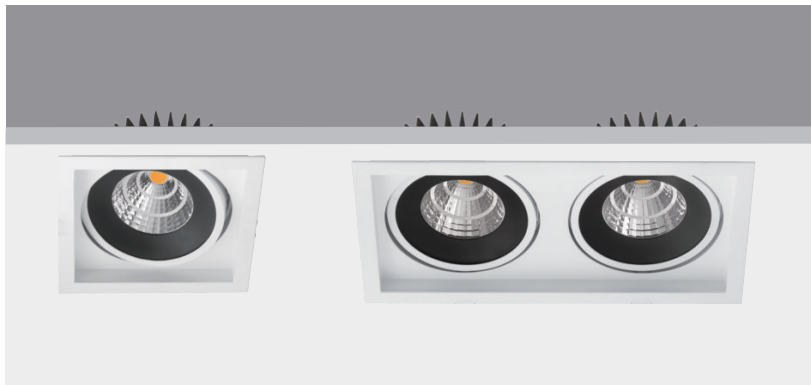

Item	KT6585-1		KT6585-2	
LED Brand	CITIZEN	CITIZEN	CITIZEN	CITIZEN
	CLL032-1205A5	CLU034-1206B8	CLL032-1205A5	CLU034-1206B8
		-303M1A2		-303M1A2
LED Power	12 W	22 W	2x12 W	2x22 W
Driver	AK-16W-60350-D6	LC 25W 600mA		LC 25W 600mA
Total Power	15 W	25 W	2x15 W	2x25 W
Driver Current	350mA	600mA	350mA	1200mA
Luminous Flux	1080 LM	1720 LM	2160 LM	3440 LM
CCT		3000K		
CRI		> 80		
Beam Angle		24 ° (17 ° / 60 °)		

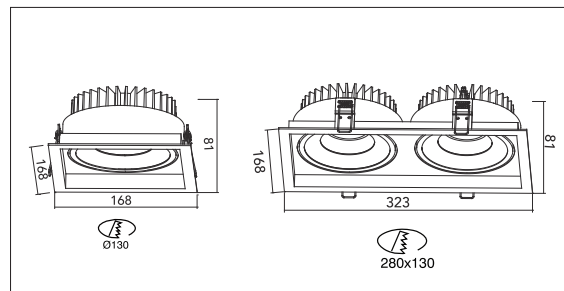

CITIZEN 12.3 W



E (lx)	h (m)	17.95 °	∅ (cm)
2926	1		31.59
732	2		63.18
325	3		94.77
183	4		126.37
117	5		157.96

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Leaf clip
Adjustable:	Fixed
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ:	108 pcs

PACKING

	KT6584-1	KT6584-2
Box size:	17.3 x 8 x 19.5 cm	20.5 x 9 x 35 cm
Carton size:	40.5 x 36.5 x 26 cm	42.5 x 36.5 x 38.5 cm
Pcs per carton:	12 pcs	8 pcs
Each carton :	0.038 m ³	0.06 m ³

KT6379
KT6382
KT6566





KT6379 Gx8.5
GX8.5 HIR111-CE-P
70W

KT6382 AR111
G53 QR111 50W

KT6566

Input	110-230V AC 50/60Hz
LED Brand	Bridgelux Vero13 BXRC-30E2000
LED Power	23 W
Driver	AK-30W-700-D6
Driver Current	700mA
Total Power	26 W
Luminous Flux	1780 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)

Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	V.M. Reflector


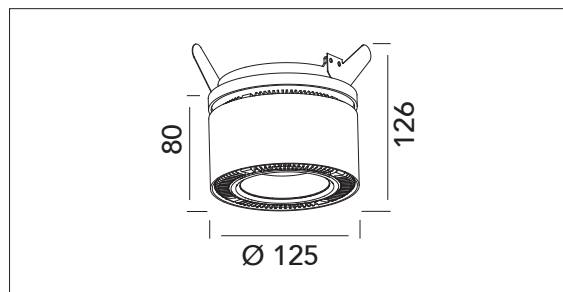


E(1x)	h(m)	20.58 °	Ø(cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94

PACKING


Box size:	15.5 x 15.5 x 16.5 cm
Carton size:	48 x 32.5 x 34.5 cm
Pcs per carton:	12 pcs
Each carton :	0.054 m ³

KT6567-1

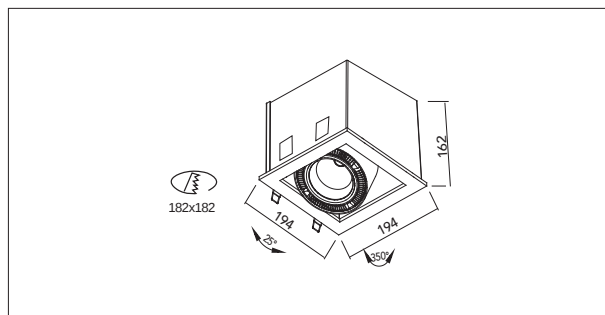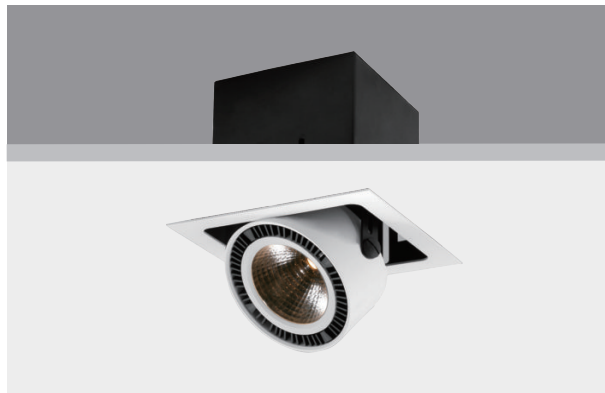

LED Brand	Bridgelux Vero13 BXRC-30E2000
Driver	AK-30W-700-D6
LED Power	23 W
Driver Current	500 mA
Total Power	26 W
Luminous Flux	1780 LM
CCT	3000 K
CRI	> 80
Beam Angle	18 °/ 30 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable:	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs




E (lx)	h (m)	20.58 °	Ø (cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94

PACKING


Box size:	23.5 x 21.5 x 20.5 cm
Carton size:	65 x 24 x 43 cm
Pcs per carton:	6 pcs
Each carton :	0.068 m ³

KT6567-2

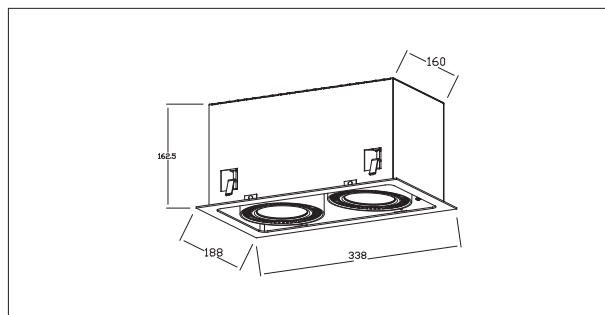

LED Brand	Bridgelux Vero13 BXRC-30E2000
Driver	AK-30W-700-D6
LED Power	2 x 23 W
Driver Current	500 mA
Total Power	2 x 26 W
Luminous Flux	3500 LM
CCT	3000 K
CRI	> 80 / 90
Beam Angle	18 ° / 30 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable:	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs



E (lx)	h (m)	20.58 °	Ø (cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94

PACKING



Box size:	23.5 x 20.5 x 36.5 cm
Carton size:	47.5 x 37.5 x 22 cm
Pcs per carton:	2 pcs
Each carton :	0.039 m ³

KT6347B



LED Brand	Bridgelux Vero13 BXRC-30E2000
Driver	KEP0902-500-D6
LED Power	17 W
Driver Current	500 mA
Total Power	20 W
Luminous Flux	1800 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	22 ° / 18° / 30 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable:	Gimbal
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs

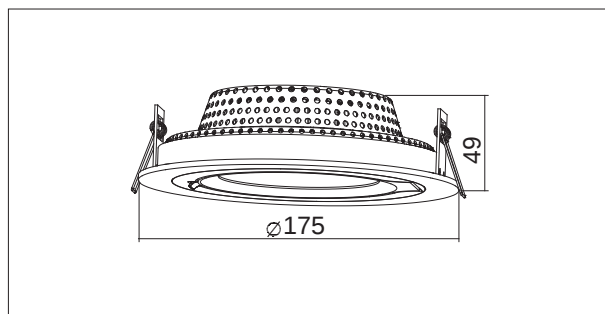

E (lx)	h (m)	22.52 °	Ø (cm)
1556	1		39.82
309	2		75.65
270	3		119.47
97	4		159.30
62	5		199.12

PACKING

Box size:	18.5 x 7.5 x 18.5 cm
Carton size:	39.5 x 38.5 x 39 cm
Pcs per carton:	20 pcs
Each carton :	0.059 m ³




KT6347

KT6347A

KT6347 KT6347A

KT6347A


LED Brand	OSRAM
Driver	PL-CN111-2700-830
Driver	OSRAM OTe 50/220
LED Power	34 W
Driver Current	1050 mA
Total Power	35 W
Luminous Flux	2700 LM
CCT	3000 K
CRI	> 80
Beam Angle	24 ° (45 °)



E (lx)	h (m)	22.09°	Ø (cm)
6044	1		39.04
1511	2		79.09
672	3		117.13
378	4		156.18
242	5		195.22

KT6347

Installation by:	S.A.Spring
Optics:	PMMA lens 45°
LED Brand	Nichia 3030
Driver	AK10W-24500-D5
LED Power	9 W
Driver Current	350 mA
Total Power	11 W
Luminous Flux	400 LM
CCT	3000 K
CRI	> 80
Beam Angle	37°





E (lx)	h (m)	37.38°	Ø (cm)
1011	1		149.91
863	2		299.81
425	3		449.72
44	4		599.63
18	5		749.54

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable:	Gimbal
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	216 pcs

PACKING

Box size:	18.5 x 7.5 x 18.5 cm
Carton size:	39.5 x 38.5 x 39 cm
Pcs per carton:	20 pcs
Each carton :	0.059 m ³

KT6355

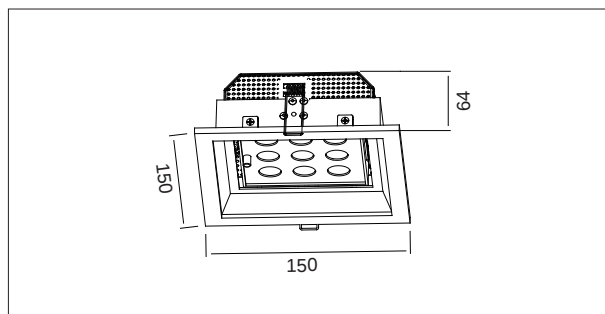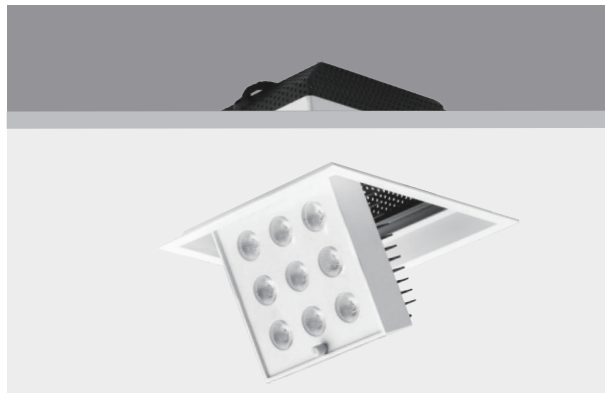


LED Brand	CREE XT-E
Driver	KEP0902-700-D6
LED Power	18 W
Driver Current	700 mA
Total Power	20 W
Luminous Flux	1400 LM
CCT	3000 K
CRI	> 80
Beam Angle	27 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable:	Tilttable
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	PMMA lens 40°
MOQ:	216 pcs

PACKING

Box size:	22.5 x 19.5 x 7.5 cm
Carton size:	46.5 x 40.5 x 32 cm
Pcs per carton:	16 pcs
Each carton :	0.06 m ³

KT6355A

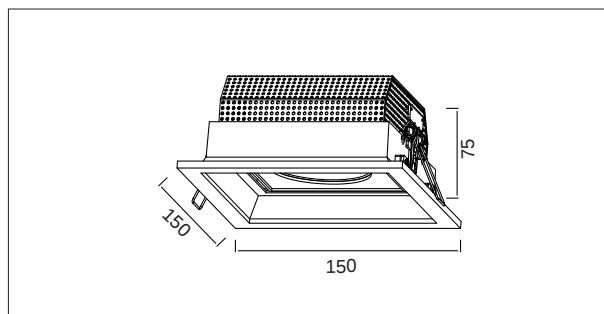

LED Brand	CITIZEN CLL032-1206A5-303M1A2
Driver	AK-30W-500-D6
LED Power	18 W
Driver Current	500 mA
Total Power	20 W
Luminous Flux	1500 LM
CCT	3000 K
CRI	> 80
Beam Angle	15 ° (25 ° / 40 °)

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable:	Tiltable
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	PMMA lens 40°
MOQ:	216 pcs


PACKING

Box size:	22.5 x 19.5 x 7.5 cm
Carton size:	46.5 x 40.5 x 32 cm
Pcs per carton:	16 pcs
Each carton :	0.06 m ³

MH206-LED KT6627



ITEM:	MH206-LED	KT6627
LED Brand	CREE XP-E	Bridgelux 30E 4000F X3
Driver	KEP0902-500A1	KEP40W-4310A1
LED Power	12 W	29 W
Driver Current	500 mA	1000 mA
Total Power	15 W	33 W
Luminous Flux	470 LM	2710 LM
CCT	3000 K	3000 K
CRI	> 80	> 80
Beam Angle	68 °	15° / 24° / 60°

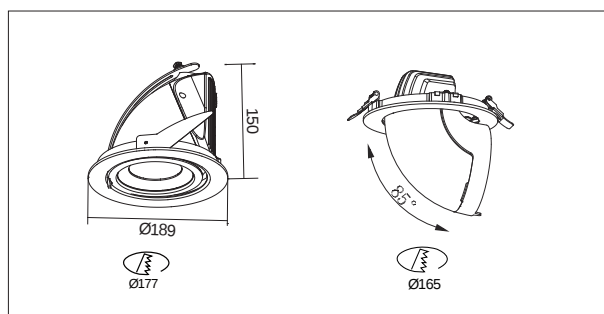


ITEM:	MH206-LED KT6627
Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	PMMA lens 40° PC Metalized Reflector

PACKING	MH206-LED	KT6627
Box size:	21 x 21 x 18 cm	16 x 11.5 x 6 cm
Carton size:	43.5 x 43.5 x 37.5 cm	36 x 33.5 x 26.5 cm
Pcs per carton:	8 pcs	8 pcs
Each carton :	0.071 m ³	0.032 m ³

MH103-LED



LED Brand	Bridgelux 30E 4000F X3
Driver	KEP40W-4310A1
LED Power	29 W
Driver Current	1000 mA
Total Power	33 W
Luminous Flux	2710 LM
CCT	3000 K
CRI	> 80
Beam Angle	15 ° /24 ° /60°

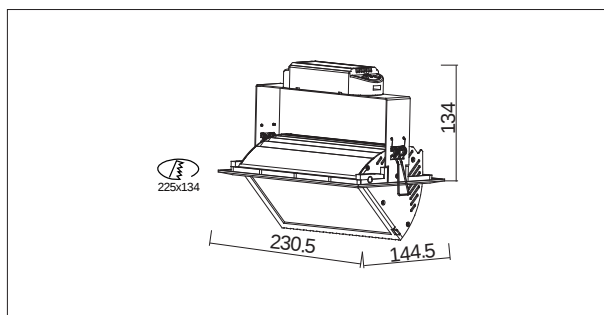

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Tiltable
Installation by:	S.A.Spring
Wiring:	Terminal Block

PACKING

Box size:	22.5 x 19.5 x 7.5 cm
Carton size:	46.5 x 40.5 x 32 cm
Pcs per carton:	16 pcs
Each carton :	0,06 m ³




KT6631



KT6631

LED Brand	Bridgelux V8 BXRC-30E0800
Driver	AK-10W-24500-D5
LED Power	9.5 W
Driver Current	500 mA
Total Power	11 W
Luminous Flux	900 LM
CCT	3000 K
CRI	> 80
Beam Angle	28.5 °



PACKING


Box size:	18.5 x 15.5 x 8 cm
Carton size:	48 x 38.5 x 34 cm
Pcs per carton:	24 pcs
Each carton :	0,062 m ³

KT6632



KT6632

LED Brand	CITIZEN CLL032-1205A5-303M1A2
Driver	AK-16W-60350-D6
LED Power	13.5 W
Driver Current	500 mA
Total Power	17.5 W
Luminous Flux	1400 LM
CCT	3000 K
CRI	> 80
Beam Angle	15 °/24 °/38 °/60 °



PACKING


Box size:	20.5 x 17.5 x 9 cm
Carton size:	54 x 42.5 x 29 cm
Pcs per carton:	18 pcs
Each carton :	0,067 m ³

KT6633



KT6633

LED Brand	CITIZEN CLL032-1208A5-303M1A2
Driver	AK-30W-700-D6
LED Power	25 W
Driver Current	500 mA
Total Power	26.5 W
Luminous Flux	1980 LM
CCT	3000 K
CRI	> 80
Beam Angle	15 °/24 °/38 °/60 °



PACKING


Box size:	23.5 x 19.5 x 9.5 cm
Carton size:	48.5 x 40.5 x 30.5 cm
Pcs per carton:	12 pcs
Each carton :	0,060 m ³

KT6634



KT6634

LED Brand	CITIZEN CLL032-1212A5-303M1A2
LED Power	36 W
Driver	KEP40W-4310A1
Total Power	40 W
Driver Current	1000 mA
Luminous Flux	3040 LM
CCT	3000 K
CRI	> 80 / 90
Beam Angle	20°



PACKING

Box size:	20.5 X 20.5 X 13 cm
Carton size:	42.5 X 22 X 42 cm
Pcs per carton:	6 pcs
Each carton :	0,039 m ³




KT6664



KT6664

LED Brand	NICHIA 3030LED
LED Power	6 W
Driver	AK-10W-36330-D5
Total Power	7 W
Driver Current	330mA
Luminous Flux	460 LM
CCT	3000 K
CRI	> 80
Beam Angle	84 °



PACKING

Box size:	19.5 x 15 x 8 cm
Carton size:	46.5 x 40.5 x 34 cm
Pcs per carton:	24 pcs
Each carton :	0,064m ³

KT6653



KT6653

LED Brand	Nichia 3030
Driver	AK-16W-60350-D6
LED Power	12 W
Driver Current	500 mA
Total Power	15 W
Luminous Flux	900 LM
CCT	3000 K
CRI	> 80
Beam Angle	86 °



PACKING


Box size:	20.5 x 17.5 x 9 cm
Carton size:	54 x 42.5 x 29 cm
Pcs per carton:	18 pcs
Each carton :	0,067 m ³

KT6654



KT6654

LED Brand	Nichia 3030
Driver	AK-30W-350-D6
LED Power	20 W
Driver Current	350 mA
Total Power	22 W
Luminous Flux	1500 LM
CCT	3000 K
CRI	> 80
Beam Angle	84 °



PACKING


Box size:	23.5 x 19.5 x 9.5 cm
Carton size:	48.5 x 40.5 x 30.5 cm
Pcs per carton:	12 pcs
Each carton :	0,060 m ³

KT6655



KT6655

LED Brand	Nichia 3030
Driver	KEP50W-4312A1
LED Power	40 W
Driver Current	500 mA
Total Power	45 W
Luminous Flux	2580 LM
CCT	3000 K
CRI	> 80
Beam Angle	89 °






PACKING

Box size:	28.5 x 24.5 x 10.5 cm
Carton size:	49.5 x 29.5 x 33.5 cm
Pcs per carton:	6 pcs
Each carton :	0,048 m ³



KT6613

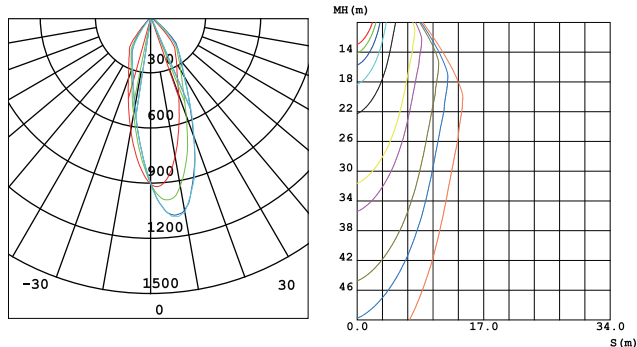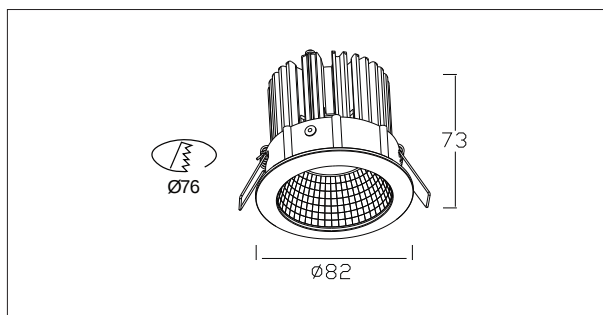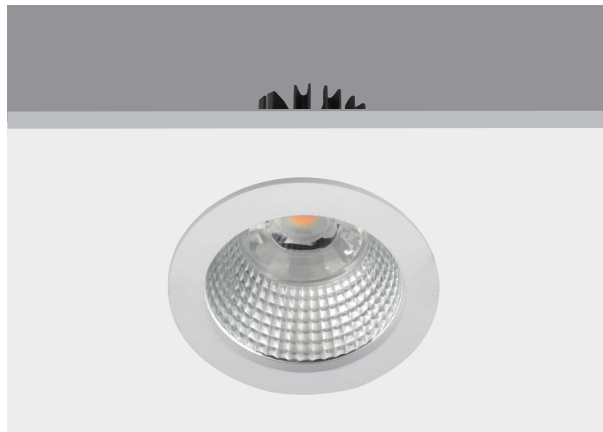



LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000K
CRI	> 80
Beam Angle	31 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed / Gimbal
Installation by:	S.A.Spring
Wiring:	Flexible Wire / Striped End
Optics:	V.M. Reflector

PACKING

Box size:	41 x 21 x 25.5 cm
Carton size:	10 x 10 x 8 cm
Pcs per carton:	24 pcs
Each carton :	0.022 m ³

KT6614

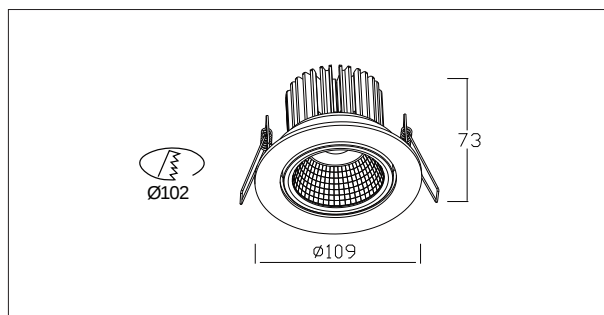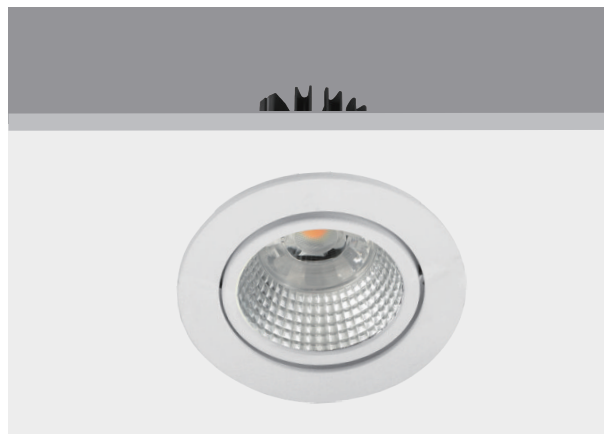


LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000K
CRI	> 80
Beam Angle	31 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed / Gimbal
Installation by:	S.A.Spring
Wiring:	Flexible Wire / Striped End
Optics:	V.M. Reflector



PACKING

Box size:	41 x 21 x 25.5 cm
Carton size:	10 x 10 x 8 cm
Pcs per carton:	24 pcs
Each carton :	0.022 m ³

KT6598 KT6599

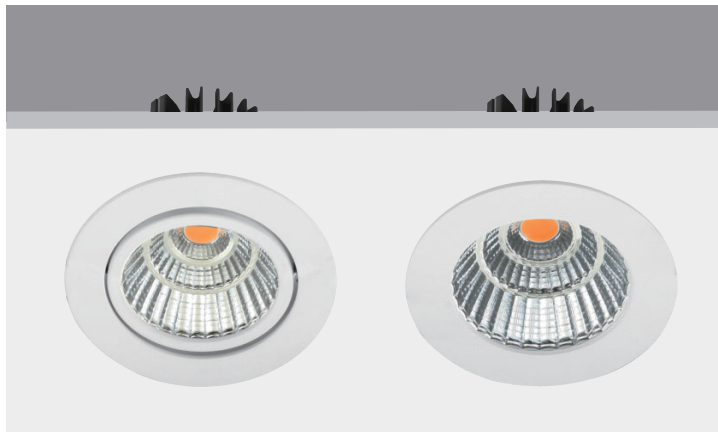

LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000K
CRI	> 80
Beam Angle	31 °

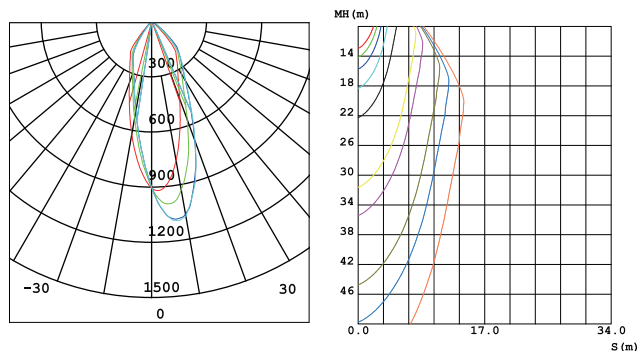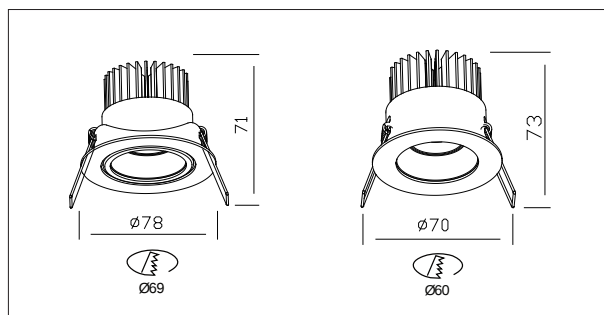

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed / Gimbal
Installation by:	S.A.Spring
Wiring:	Flexible Wire / Striped End
Optics:	V.M. Reflector


PACKING

Box size:	9.5 x 9.5 x 8 cm
Carton size:	40 x 40 x 18 cm
Pcs per carton:	24 pcs
Each carton :	0.033 m ³



KT6811



LED Brand	Nichia 3030
LED Power	8 W
Driver	AK-10W-24500-D5
Total Power	9 W
Driver Current	330 mA
Luminous Flux	700 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	40°

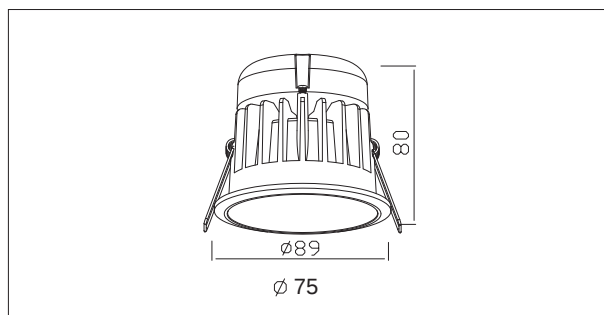


Input:	100-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	204 pcs



PACKING





Box size:	12 x 12 x 9 cm
Carton size:	37.5 x 25.5 x 38 cm
Pcs per carton:	24 pcs
Each carton :	0,037 m ³

KT6666



OSRAM S High Voltage Modules

LED Brand	OSRAM
	PrevaLED LEP-CUB-AC-2000-830-G1
LED Power :	28 W
Luminous Flux	2000 LM
CCT	3000 K
CRI	> 80
Beam Angle	55 °

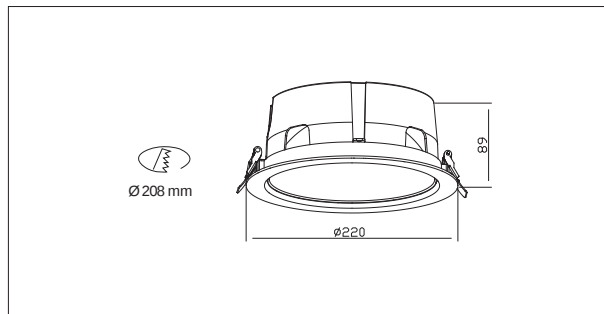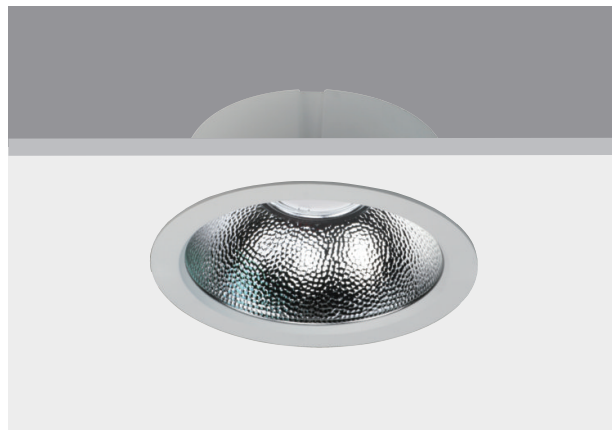


Input:	220-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	204 pcs



PACKING

Box size:	20.5 x 20.5 x 16.5 cm
Carton size:	42.5 x 42.5 x 51.5 cm
Pcs per carton:	12 pcs
Each carton :	0,093 m ³

KT6562 KT6673

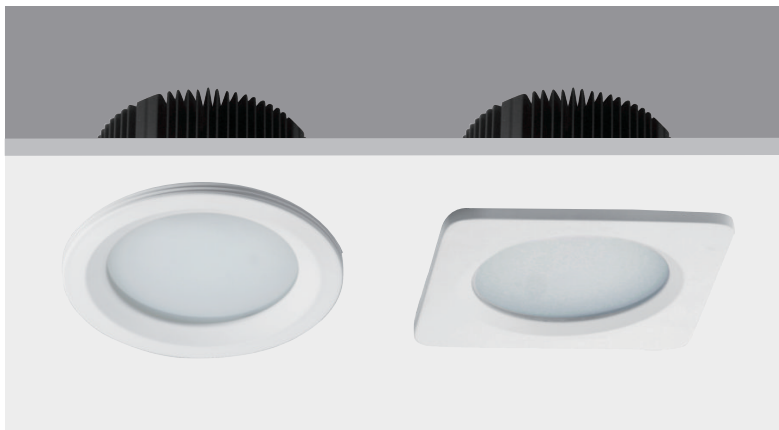

LED Brand	Nichia NF2L757DR-E
LED Power	11 W
Driver	KEP1501-350A1
Total Power	13 W
Driver Current	350 mA
Luminous Flux	800 LM
CCT	3000 K
CRI	> 80
Beam Angle	100 °

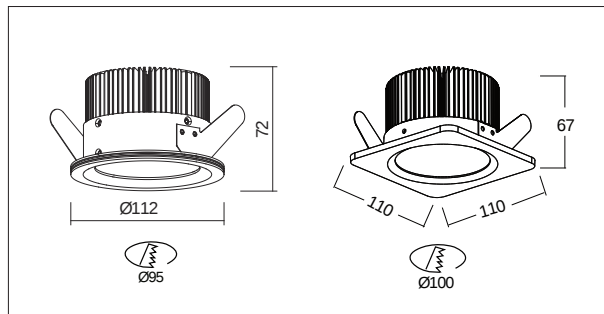


E (lx)	h (m)	98.72 °	Ø (cm)
1121	1		233.02
280	2		466.04
125	3		699.06
70	4		932.09
45	5		1165.11

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	108 pcs


PACKING

Box size:	11.5 x 11.5 x 7.5 cm
Carton size:	36 x 24.5 x 32 cm
Pcs per carton:	24 pcs
Each carton :	0,029 m ³


KT6561 KT6663

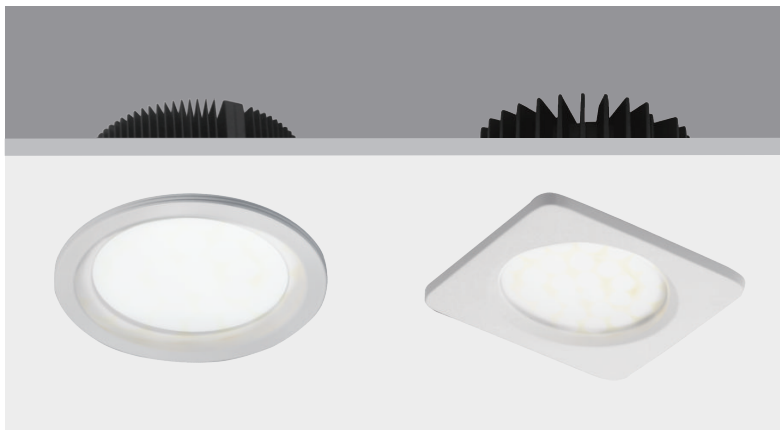

LED Brand	Nichia NF2L757DR-E
LED Power	22 W
Driver	AK-30W-700-D6
Total Power	25 W
Driver Current	700 mA
Luminous Flux	1600 LM
CCT	3000 K
CRI	> 80
Beam Angle	100°

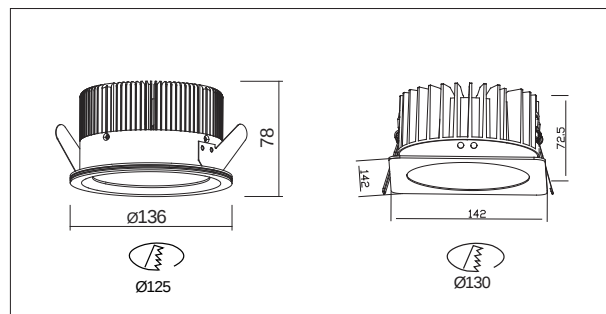

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	108 pcs




E(1x)	h(m)	100.19°	Ø(cm)
2320	1		239.16
580	2		478.32
258	3		717.48
145	4		956.64
93	5		1195.80

PACKING

Box size:	16.5 x 15 x 9 cm
Carton size:	34.5 x 31.5 x 30 cm
Pcs per carton:	12 pcs
Each carton :	0,033 m ³




KT7125 KT7127

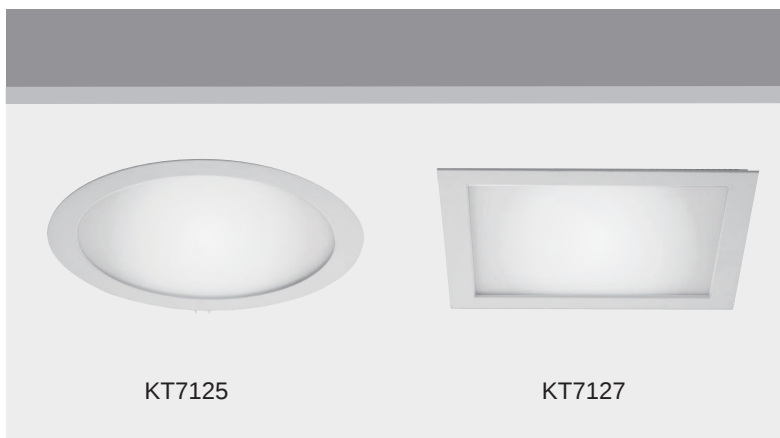

KT7125

KT7127

ITEM NO		
LED Brand	EVERlight SMD2835	
LED Power	17 W	18 W
Driver	AK-30W-350-D6	
Total Power	20 W	22 W
Driver Current	350 mA	
Luminous Flux	1000 LM	1190 LM
CCT	3000 K	
CRI	> 80	
Beam Angle	112 °	

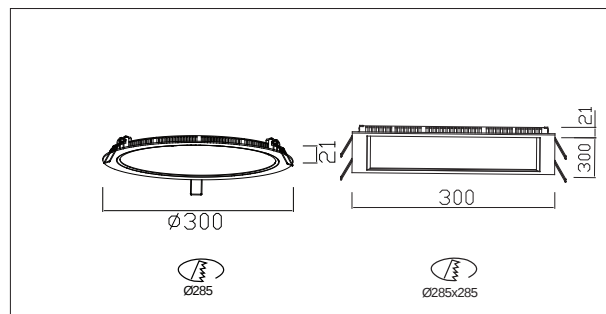

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs

PACKING


Box size:	39 x 6 x 34 cm
Carton size:	51 x 35 x 40.5 cm
Pcs per carton:	16 pcs
Each carton :	0,084 m ³

KT7126

KT7128



ITEM NO	KT7126	
LED Brand	Everlight SMD2835 + Citizen CLL032-1205	Everlight SMD2835 + Bridgelux BXRA-30E0540
LED Power	17 W+13.5 W	18 W+6 W
Driver	AK-30W-350-D6 + AK-16W-60350-D6	AK-30W-350-D6 + AK-10W-36330-D5
Total Power	36 W	30 W
Driver Current	350 mA	
Luminous Flux	2250 LM	1800 LM
CCT	3000K	
CRI	> 80	
Beam Angle	111 °+ 38 °	

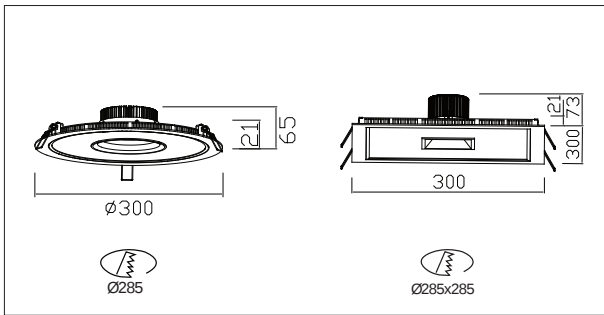

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs

PACKING


	KT7126	KT7128
Box size:	30.5 x 30.5 x 7 cm	30.5 x 30.5 x 8 cm
Carton size:	61.5 x 44 x 32.5 cm	61.5 x 50 x 32.5 cm
Pcs per carton:	8 pcs	12 pcs
Each carton :	0,088 m ³	0,12 m ³



KT6370
KT6348
KT6345



ITEM	KT6345	KT6348	KT6370
LED Brand	Everlight SMD3528		
LED Power	15 W	9 W	6 W
Driver	KEP0902-500B1	AK-10W-36330-D5	AK-8W-30330-D4
Total Power	18 W	11 W	9 W
Driver Current	500 mA	500 mA	330 mA
Luminous Flux	800 LM	500 LM	300 LM
CCT	3000 K	3000 K	3000 K
CRI	> 80	> 80	> 80
Beam Angle	111 °	111 °	111 °

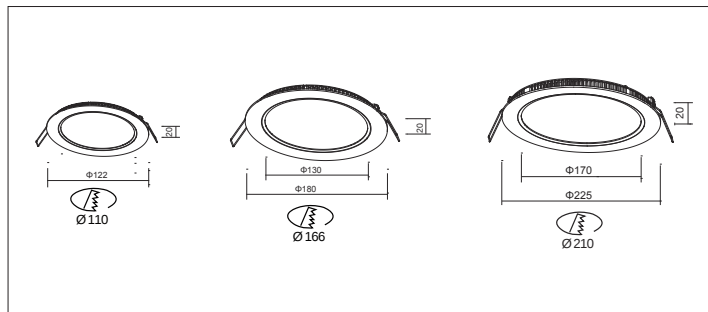

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs


PACKING	KT6345	KT6348	KT6370
Box size:	35.5x5.8x26.5 cm	27x5.3x21.5 cm	19.5x6x15.5 cm
Carton size:	50x37x55.5 cm	46.5x28.5x45.5 cm	40.5x38.5x48.5 cm
Pcs per carton:	16 pcs	16 pcs	36 pcs
Each carton :	0.025 m ³	0.0168 m ³	0,076 m ³



KT6371
KT6369
KT6346



ITEM	KT6371	KT6369	KT6346
LED Brand	Edison 2835		
LED Power	5 W	12 W	18 W
Driver	AK-8W-30330-D4	AK-10W-36330-D5	KEP-LD18W-D1
Total Power	8 W	15 W	21 W
Driver Current	330 mA	330 mA	400 mA
Luminous Flux	250 LM	600 LM	900 LM
CCT	3000 K	3000 K	3000 K
CRI	> 80	> 80	> 80
Beam Angle	111 °	111 °	111 °

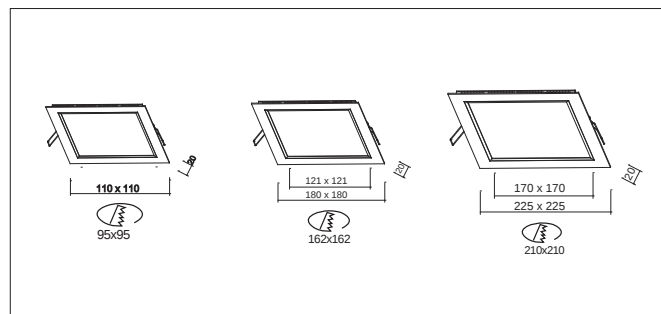


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs


PACKING	KT6371	KT6369	KT6346
Box size:	19.5x6 x15.5 cm	27x6x22 cm	39x6x34 cm
Carton size:	40.5x38.5x48.5 cm	55.5x38.5x46 cm	51x35x40.5 cm
Pcs per carton:	36 pcs	24 pcs	8 pcs
Each carton :	0,076 m ³	0,098 m ³	0,084 m ³



KT6621

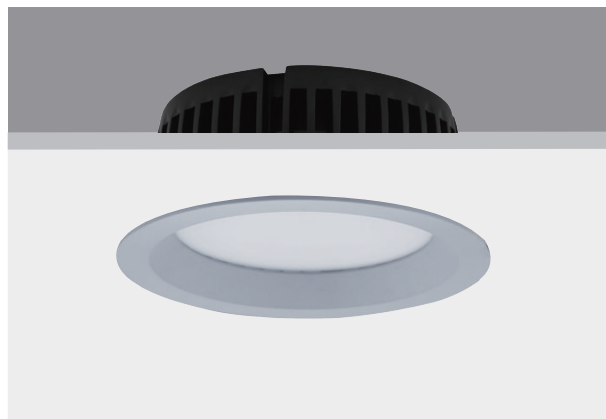

LED Brand	LG 5630		
LED Power	25 W	32 W	41 W
Driver	KEP36W-5307A1		KEP50W-5310A1
Total Power	29 W	38 W	49 W
Driver Current	700 mA	700 mA	1050 mA
Luminous Flux	2250 LM	2860 LM	3460 LM
CCT	4000K		
CRI	> 80		
Beam Angle	97 °		

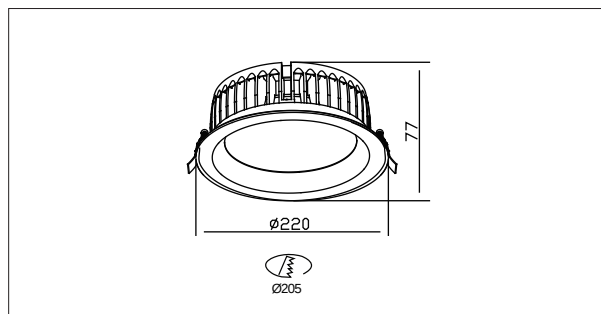


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
MOQ	112 pcs


PACKING

Box size:	28 x 26.5 x 10 cm
Carton size:	54 x 29 x 32 cm
Pcs per carton:	6 pcs
Each carton :	0,071 m ³


MH1097
MH1095

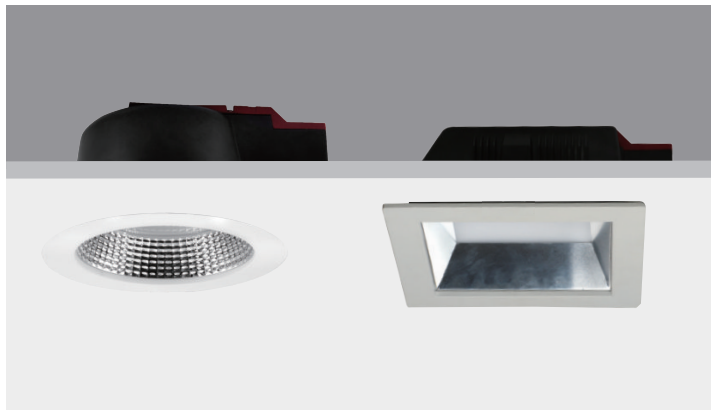

LED Brand	Nichia 3030 LED
LED Power	30 W
Driver	KEP40W-4310A1
Total Power	32.5 W
Driver Current	1000 mA
Luminous Flux	1660 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	73 °

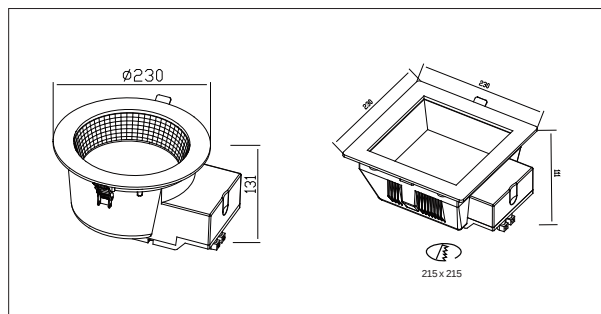

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	200 pcs





$E(1x)$	$h(m)$	84.19°	$\varnothing(cm)$
5204	1		180.70
1301	2		361.39
578	3		542.09
325	4		722.78
208	5		903.48


PACKING	MH1095	MH1097
Box size:	23.5 x 12.5 x 26 cm	23.5x13.5x26 cm
Carton size:	53.5 x 48.5 x 27.5 cm	53.5x48.5x31. 5 cm
Pcs per carton:	8pcs	8 pcs
Each carton :	0,07m ³	0,071 m ³



FT210C FT210

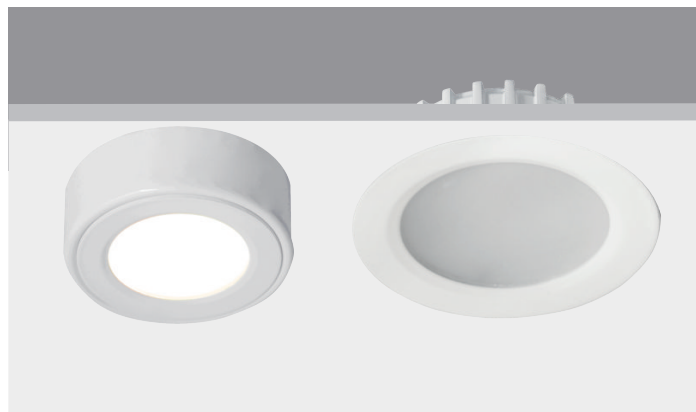

LED Brand	Edison 2835
Driver	KEP0301-350A1
Power	3 W
Driver Current	350 mA
Luminous Flux	120 LM
CCT	3000 K
CRI	> 80
Beam Angle	111 °

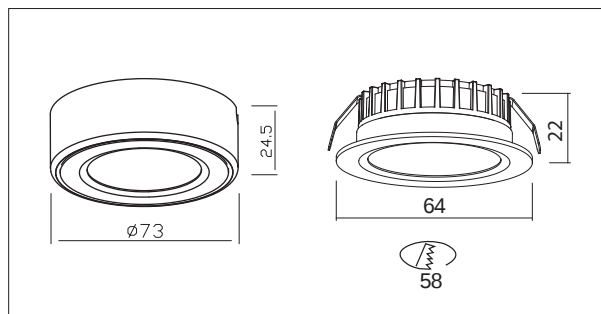

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ	200 pcs



PACKING

Box size:	7 x 7 x 3 cm
Carton size:	58 x 58 x 17 cm
Pcs per carton:	200 pcs
Each carton :	0,057 m ³




FT211C FT211

FT211K3

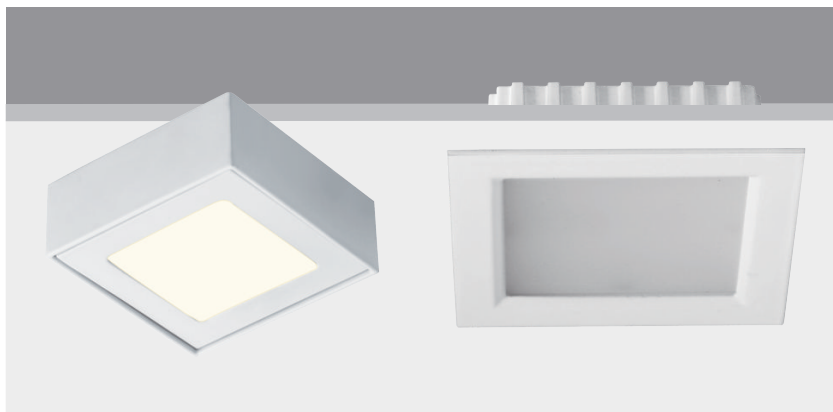

LED Brand	Edison 2835
Driver	KEP0301-350A1
Power	3 W
Driver Current	350 mA
Luminous Flux	120 LM
CCT	3000 K
CRI	> 80
Beam Angle	111 °

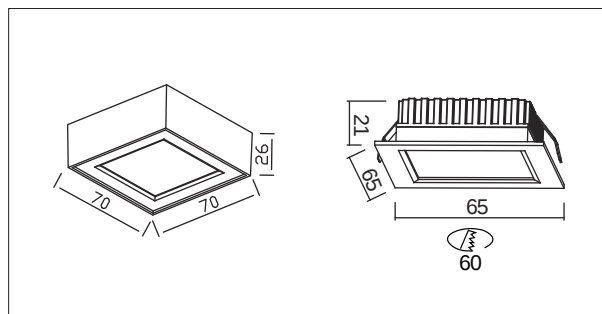

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ	200 pcs

PACKING

Box size:	7 x 7 x 3 cm
Carton size:	58 x 58 x 17 cm
Pcs per carton:	200 pcs
Each carton :	0,057 m ³

Apollo Recessed Downlight

Apollo Series are a newly developed recessed downlight. Provides with high brightness OSRAM, PHILIPS LED light source, power supply from constant current driver. you can select the optimal light for every application.

TECHNICAL DATA

KT6618

KT6617

KT6572

Input:	220-240V AC 50/60Hz		
Main Material:	Aluminium		
Surface Finish:	White, Grey, Black powder coating		
Adjustable :	Fixed		
Installation by:	S.A.Spring		
Wiring:	Terminal Block	Flexible Wire /	Flexible Wire /
Optics:	V.M. Reflector	Striped End	Striped End
MOQ	108 pcs		

LIGHT


LED Brand	OSRAM	PHILIPS
	PrevaLED LEP-CUB-AC-2000-830-G1	DLM-Int 2000lm
LED Power :	28 W	28 W
Driver	Osram OTP33	Integrated
Total Power	32 W	32 W
Driver Current	700 mA	700 mA
Luminous Flux	2000 LM	1700 LM
CCT	3000 K	3000 K
CRI	> 80	> 80
Beam Angle	24 ° (17 ° / 60 °)	100 °

PACKING


Box size:	20.5 x 20.5 x 16.5 cm	18 x 18 x 21 cm	18 x 18 x 21 cm
Carton size:	42.5 x 42.5 x 51.5 cm	56 x 37.5 x 44 cm	56 x 37.5 x 44 cm
Pcs per carton:	12 pcs	12 pcs	12 pcs
Each carton :	0,093 m ³	0,092 m ³	0,092 m ³




KT6618




KT6617




KT6572



Osram 29W

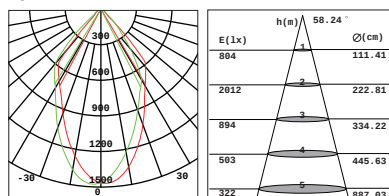

PHILIPS 28W



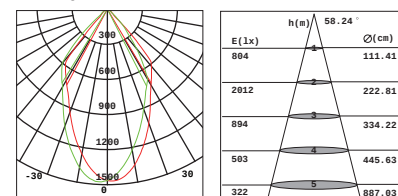




KT6808A



LED Brand	Bridgelux V8 BXRE-30E0800
LED Power	9 W
Driver	AK-10W-24500-D5
Total Power	12 W
Driver Current	500 mA
Luminous Flux	850 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	50° / 30°

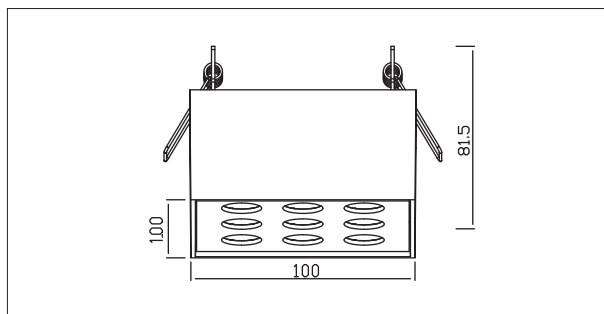




Input:	100-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	216 pcs

PACKING

Box size:	12.5 x 12.5 x 10.5 cm
Carton size:	52 x 26.5 x 33.5 cm
Pcs per carton:	24 pcs
Each carton :	0,046 m ³



KT6808B

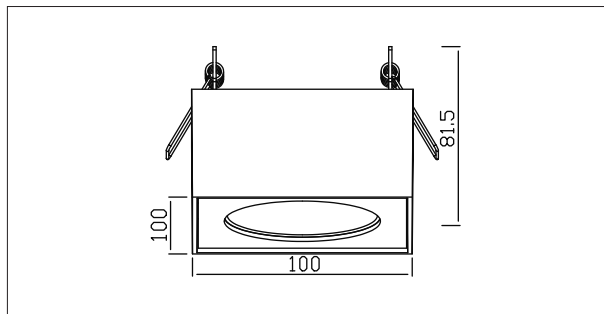

LED Brand	CLL032-1205
LED Power	15 W
Driver	KEP-LD18W-D1
Total Power	16 W
Driver Current	320 mA
Luminous Flux	1190 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	50° / 30°




Input:	100-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	216 pcs

PACKING

Box size:	12.5 x 12.5 x 10.5 cm
Carton size:	52 x 26.5 x 33.5 cm
Pcs per carton:	24 pcs
Each carton :	0,046 m ³



KT6808C

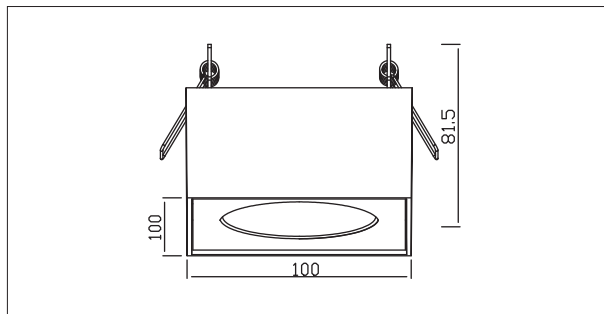

LED Brand	CLL032-1205
LED Power	15 W
Driver	KEP-LD18W-D1
Total Power	16 W
Driver Current	320 mA
Luminous Flux	1190 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	50° / 30°




Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	216 pcs

PACKING

Box size:	12.5 x 12.5 x 10.5 cm
Carton size:	52 x 26.5 x 33.5 cm
Pcs per carton:	24 pcs
Each carton :	0,046 m ³



KT6563

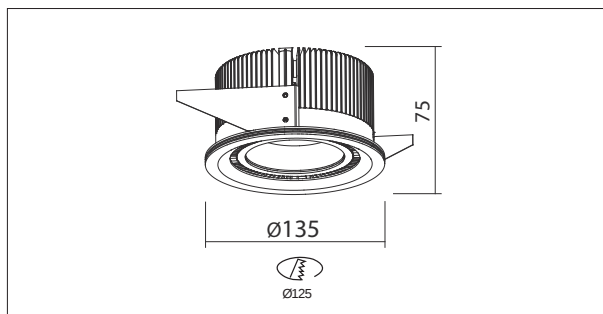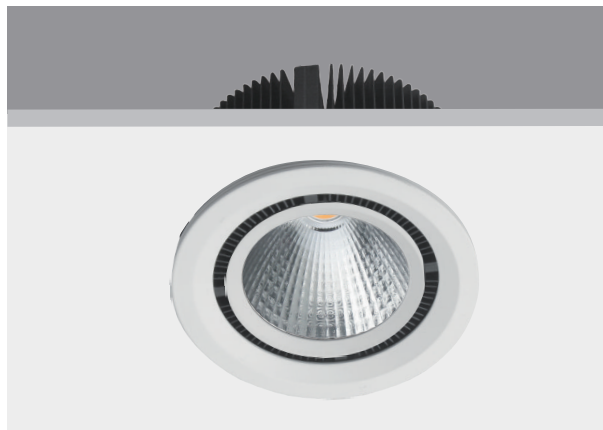

E (lx)	h (m)	20.58 °	Ø (cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94

LED Brand	Bridgelux Vero13 BXRC-30E2000
Driver	KEP30W-700A1
Power	26.5 W
Driver Current	700 mA
Luminous Flux	1780 LM
CCT	3000 K
CRI	> 80
Beam Angle	18 ° / 30 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	200 pcs


PACKING

Box size:	19.5 x 16.5 x 9 cm
Carton size:	39.5 x 34.5 x 29 cm
Pcs per carton:	12 pcs
Each carton :	0,04 m ³

KT6679-1 KT6679-2




LED Brand	CITIZEN	CLU034-1208B8-303M1A2
Power	37.5 W	2 x 37.5 W
Driver	KEP50W-5310A1	
Total Power	43 W	2 x 43 W
Driver Current	1050 mA	1050 mA
Luminous Flux	2830 LM	5720 LM
CCT	3000 K	
CRI	≥ 80 / 90	
Beam Angle	24 °	

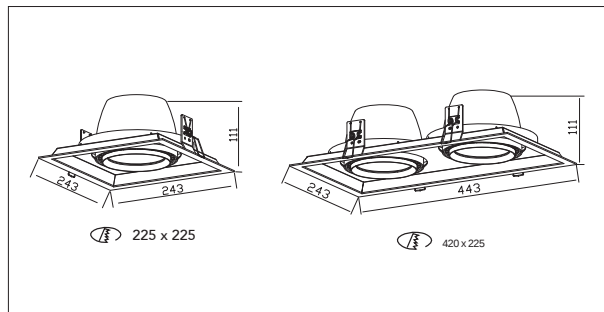

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING	KT6679-1	KT6679-2
Box size:	28.5 x 28.5 x 13.5 cm	48.5 x 28.5 x 13.5 cm
Carton size:	58.5 x 29.5 x 42.5 cm	49.5 x 29.5 x 56 cm
Pcs per carton:	6 pcs	4 pcs
Each carton :	0,073 m ³	0,082 m ³

KT6673

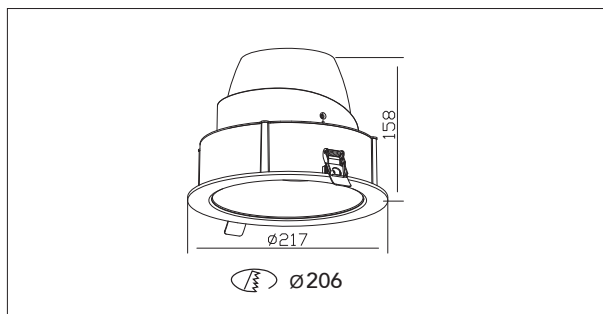


LED Brand	CITIZEN CLU034-1208B8-303M1A2
LED Power	37.5 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2830 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24 °

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	26 x 26 x 17.5 cm
Carton size:	53.5 x 27 x 54.5 cm
Pcs per carton:	6 pcs
Each carton :	0,078 m ³

KT6667

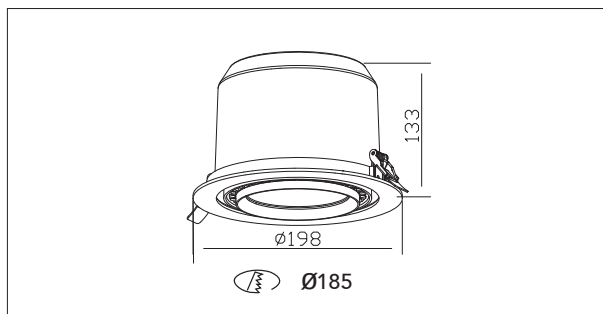



LED Brand	CITIZEN CLU034-1208B8-303M1A2
LED Power	37.5 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2830 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24 °

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	24 x 24 x 15 cm
Carton size:	49.5 x 25 x 47 cm
Pcs per carton:	6 pcs
Each carton :	0,058 m ³

KT6809

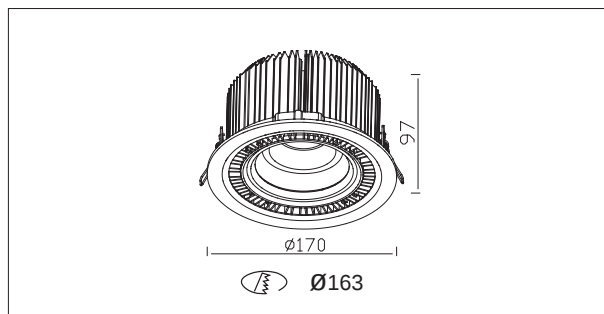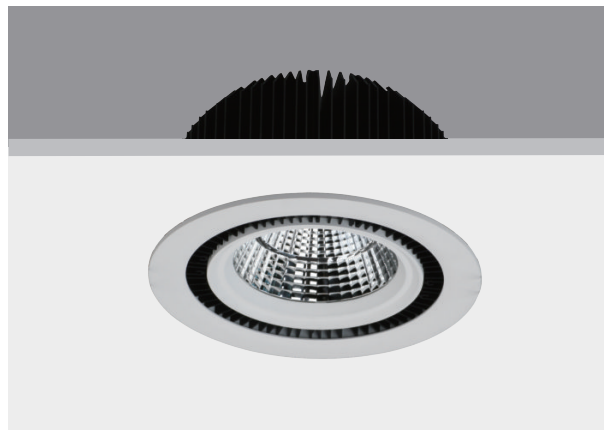



LED Brand	CITIZEN CLU034-1208B8-303M1A2
LED Power	37.5 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2960 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24 °

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	W/wire
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING

Box size:	20.5 x 20.5 x 12 cm
Carton size:	42.5 x 21.5 x 50 cm
Pcs per carton:	8 pcs
Each carton :	0,046 m ³

KT6810

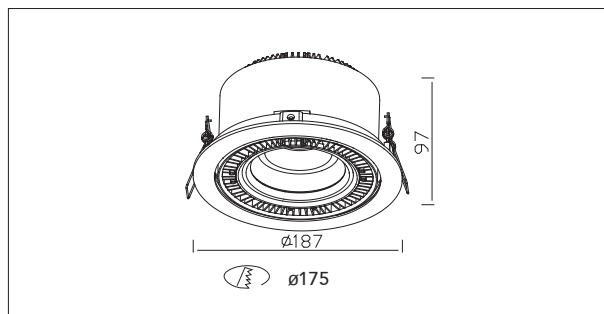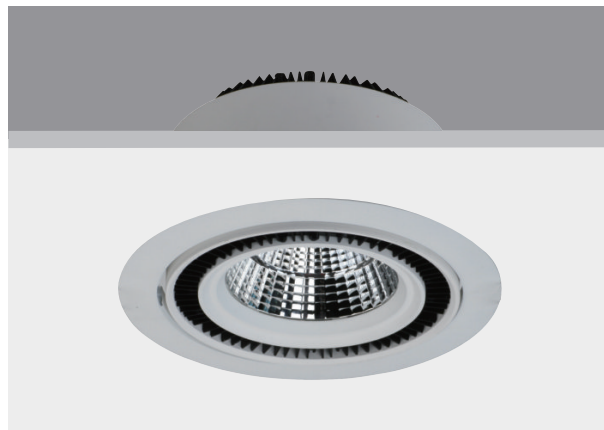



LED Brand	CITIZEN CLU034-1208B8-303M1A2
LED Power	37.5 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2960 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24 °

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING

Box size:	45.5 x 26.5 x 48.5 cm
Carton size:	25.5 x 22 x 11.5 cm
Pcs per carton:	8 pcs
Each carton :	0,058 m ³

KT6697

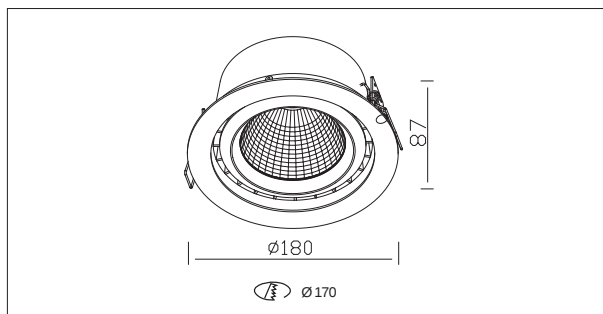

697, 3, 1019f c	3, 33f t
7506, 10968 x	40, 55cm
174, 3, 254, 8f c	2, 661f t
1876, 2742 x	81, 10cm
77, 48, 113, 2f c	3, 991f t
834, 0, 1219 x	121, 65cm
43, 58, 63, 69f c	5, 322f t
469, 1, 695, 5f x	162, 20cm
27, 89, 40, 78f c	6, 652f t
300, 2, 438, 7f x	202, 76cm

LED Brand LUMINUS CXM18

LED Power 37.5 W

Driver KEP40W-4310A1

Total Power 40 W

Driver Current 1000 mA

Luminous Flux 3230 LM

CCT 3000 K

CRI ≥ 80/90

Beam Angle 15° / 24°

Input: 220-240 V AC 50 Hz

Main Material: Aluminium + Steel

Surface Finish: White, Grey, Black powder coating

Adjustable : Fixed

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M.Reflector

MOQ 204 pcs

PACKING


Box size: 21 x 21 x 10 cm

Carton size: 43.5 x 43.5 x 32 cm

Pcs per carton: 12 pcs


Each carton : 0,06 m³

KT6698

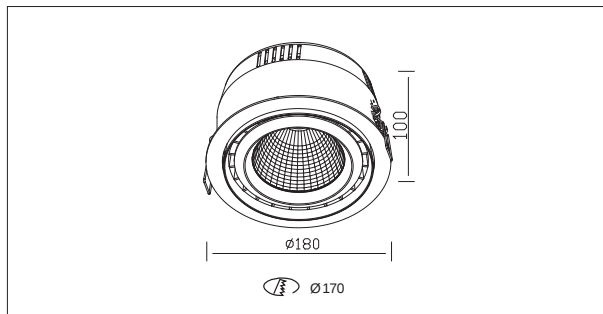

LED Brand	LUMINUS CXM18
LED Power	37.5 W
Driver	KEP40W-4310A1
Total Power	40 W
Driver Current	1000 mA
Luminous Flux	3230 LM
CCT	3000 K
CRI	≥ 80 / 90 / 95
Beam Angle	15° / 24°

Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs






697, 3, 1019f c 7506, 109688 x	1, 33ft 40, 55cm
174, 3, 254, 81 c 1876, 27420 x	2, 66ft 81, 10cm
77, 48, 113, 21 c 834, 0, 12158 x	3, 99ft 121, 65cm
43, 58, 63, 69f c 469, 1, 685, 51 x	5, 32ft 162, 20cm
27, 89, 40, 76f c 300, 2, 438, 71 x	6, 65ft 202, 76cm

PACKING

Box size:	23 x 21 x 11.5 cm
Carton size:	47.5 x 43.5 x 36.5 cm
Pcs per carton:	12 pcs
Each carton :	0.075 m ³



KT6696

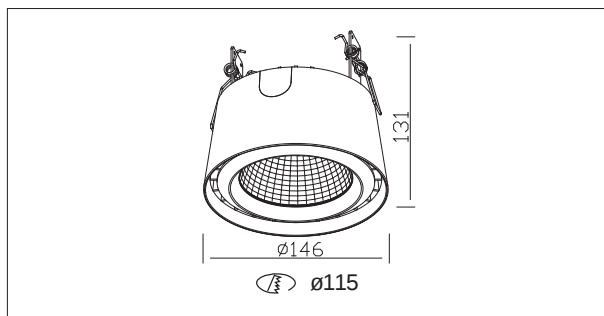

LED Brand	LUMINUS CXM18
LED Power	37.5 W
Driver	KEP40W-4310A1
Total Power	40 W
Driver Current	1000 mA
Luminous Flux	3230 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	15° / 24°


Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	21 x 21 x 14 cm
Carton size:	43.5 x 43.5 x 44 cm
Pcs per carton:	12 pcs
Each carton :	0,038 m ³



KT6695

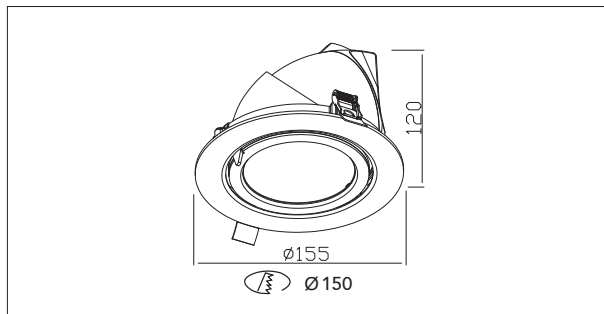




LED Brand	CREE CXA1816
LED Power	26 W
Driver	AK-30W-700-D6
Total Power	26 W
Driver Current	700 A
Luminous Flux	1790 LM
CCT	2700 K
CRI	≥ 80 / 90
Beam Angle	13 °

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	W/wire
Optics:	V.M. Reflector
MOQ	204 pcs

PACKING

Box size:	17 x 17 x 14 cm
Carton size:	35.5 x 35.5 x 44 cm
Pcs per carton:	12 pcs
Each carton :	0,055 m ³

KT6815

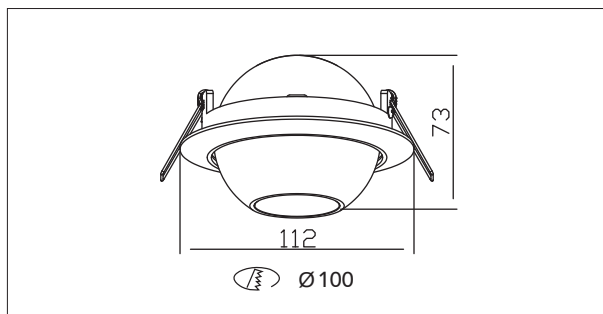

LED Brand	Bridgelux	LSP01-601-830-230
LED Power	8 W	
Driver	AK-10W-24500-D5	
Total Power	8 W	
Driver Current	500 mA	
Luminous Flux	610 LM	
CCT	3000 K	
CRI	≥ 80	
Beam Angle	40°	

Input:	110-230 V AC 50 / 60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	216 pcs

PACKING

Box size:	16 x 11.5 x 10 cm
Carton size:	36 x 33.5 x 42 cm
Pcs per carton:	24 pcs
Each carton :	0,05 m ³




KT6816-1 KT6816-2





KT6816-1

KT6816-2

ITEM	KT6816-1	KT6816-2
LED Brand	Bridgelux	LSP01-601-830-230
Total Power	8 W	2 x 8 W
Luminous Flux	610 LM	1210 LM
CCT	3000 K	
CRI	≥ 80	
Beam Angle	40°	

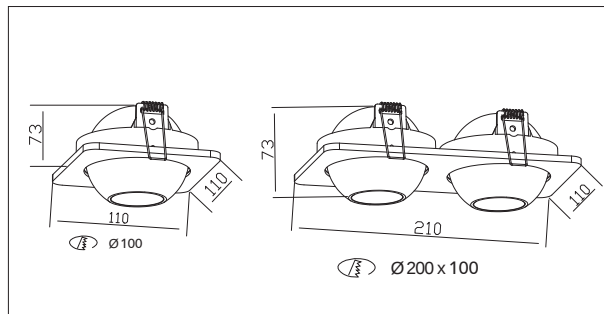

Input:	110-230 V AC 50 / 60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	216 pcs



PACKING

Box size:	20.5 x 20.5 x 16.5 cm
Carton size:	42.5 x 42.5 x 51.5 cm
Pcs per carton:	12 pcs
Each carton :	0,093 m ³




KT6817 KT6818



KT6817

KT6818

LED Brand	Bridgelux	VER08
LED Power	7 W	
Driver	KER-0901-350A1	
Total Power	10 W	
Driver Current	330 mA	
Luminous Flux	620 LM	
CCT	3000 K	
CRI	≥ 80	
Beam Angle	50° / 30°	

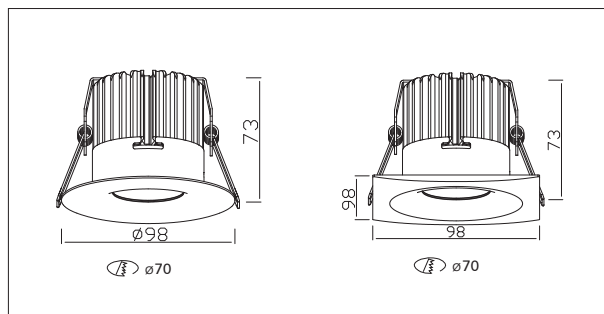

Input:	110-230 V AC 50 / 60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	216 pcs

PACKING


Box size:	16 x 11.5 x 10 cm
Carton size:	36 x 33.5 x 42 cm
Pcs per carton:	24 pcs
Each carton :	0,05 m



KT6343B KT6343C



ITEM	KT6343C	KT6343B
LED Brand	Bridgelux Vero18 BXRC-30E4000-F-02	Bridgelux Vero 18 BXRC - 30E4000 - F - 02
LED Power	24 W / 27 W / 31 W	34 W / 37 W / 42 W
Driver	OTe 35/220-240/1A0 CS	OTE 50 / 220 - 240 / 1A4 CS
Total Power	27 W / 31 W / 35 W	38 W / 42 W / 47 W
Driver Current	800 / 925 / 1050 mA	1150 / 1250 / 1400 mA
Luminous Flux	2100 / 2310 / 2800 LM	3250 / 3570 / 3840 LM
CCT	3000 K	
CRI	≥ 80	
Beam Angle	65 ° (Optional 40 ° / 24 ° / 13 °)	

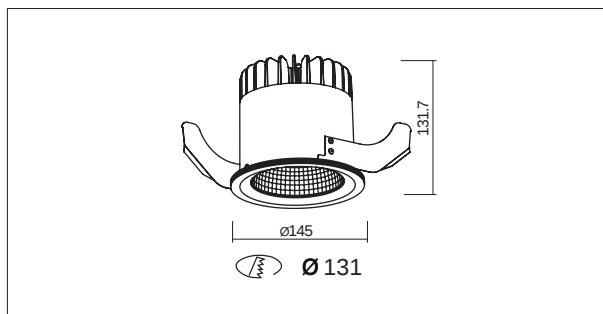

Input:	220-240 V AC 50 / 60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	200 pcs


PACKING

Box size:	26.5 x 20 x 15.5 cm
Carton size:	54.5 x 41.5 x 33 cm
Pcs per carton:	8 pcs
Each carton :	0,075 m ³



KT6813A



LED Brand	CREE CXA1830-830-T2
LED Power	29.5 W / 34 W / 38 W
Driver	OSRAM OTE 50/220-240/1AO CS
Total Power	34 W / 39 W / 45 W
Driver Current	800 / 925 / 1050 mA
Luminous Flux	2660 LM / 2960 LM / 3260 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	46 °

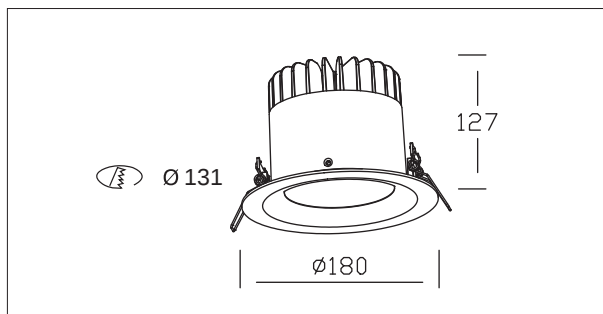


Input:	220-240 V AC 50 / 60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Single Action Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	200 pcs



PACKING


Box size:	23.5 x 21 x 15.5 cm
Carton size:	48.5 x 43.5 x 33 cm
Pcs per carton:	8 pcs
Each carton :	0,070m ³

KT6520

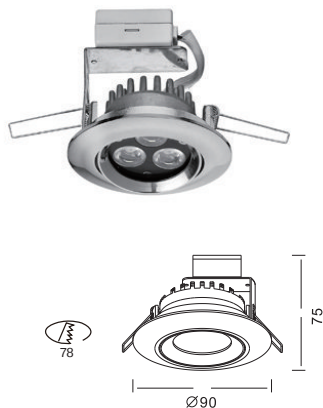

KT6520

LED Brand	Nichia 3030
Driver	KEP0301-350B1
Total Power	3 W
Driver Current	350 mA
Luminous Flux	180 LM
CCT	3000K
CRI	> 80
Beam Angle	37 °
Box size:	9.5 x 9.5 x 9.5 cm
Carton size:	49.5 x 21 x 20.5 cm
Pcs per carton:	50 pcs
Each carton :	0,052 m ³

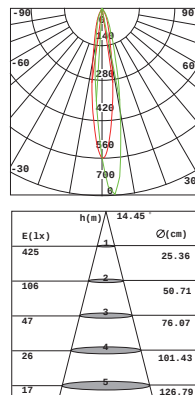


KT6524



KT6524

LED Brand	Nichia 3030
Driver	AK10W-36330-D5
Total Power	6W
Driver Current	350 mA
Luminous Flux	350 LM
CCT	3000K
CRI	> 80
Beam Angle	37 °
Box size:	11.7 x 11.7 x 10 cm
Carton size:	60.5 x 25x 55.5 cm
Pcs per carton:	50 pcs
Each carton :	0,051 m ³

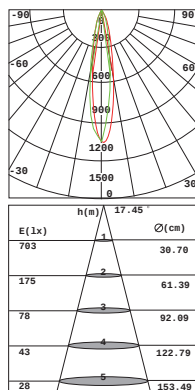


KT6525




KT6525

LED Brand	Nichia 3030
Driver	AK10W-36330-D5
Total Power	9W
Driver Current	350 mA
Luminous Flux	520 LM
CCT	3000K
CRI	> 80
Beam Angle	37 °
Box size:	16 x 16 x 12 cm
Carton size:	50 x 33.5x 51 cm
Pcs per carton:	24 pcs
Each carton :	0,085 m ³

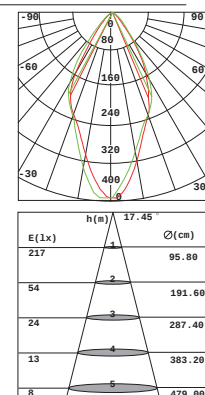



MH1088A

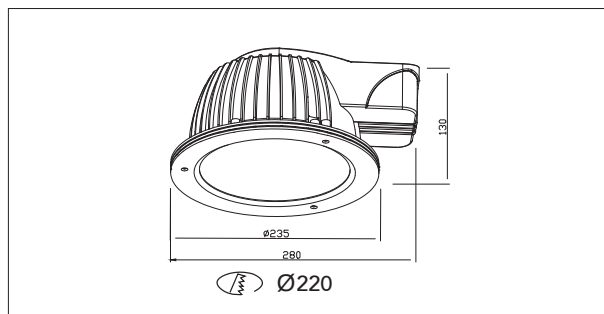

LED Brand	Nichia MH1096
LED Power	30 W
Driver	LCC30W1000-230
Total Power	32 W
Driver Current	1000 mA
Luminous Flux	2230 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	79 °

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Black,Grey
Adjustable :	Fixed
Installation by:	Single Acticon Spring
Wiring:	W/wire
Optics:	Optical diffuser panel
MOQ	216 pcs

PACKING


Box size:	24.5 x 14 x 29 cm
Carton size:	44 x 26 x 60.5 cm
Pcs per carton:	6 pcs
Each carton :	0,069 m ³



MH1088B



LED Brand	OSRAM
	PL-CUBE-AC-2000-8300-230V-G2
LED Power	22 W
Total Power	24 W
Driver Current	1000 mA
Luminous Flux	1550 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	72 °


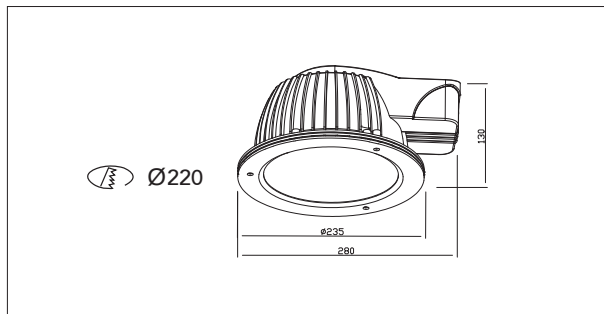


Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Black,Grey
Adjustable :	Fixed
Installation by:	Single Acticon Spring
Wiring:	W/wire
Optics:	Optical diffuser panel
MOQ	216 pcs

PACKING

Box size:	24.5 x 14 x 29 cm
Carton size:	44 x 26 x 60.5 cm
Pcs per carton:	6 pcs
Each carton :	0,069 m ³

KT6636

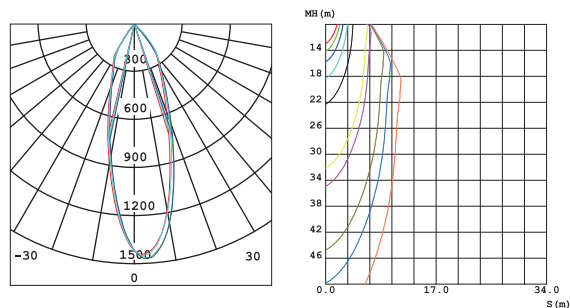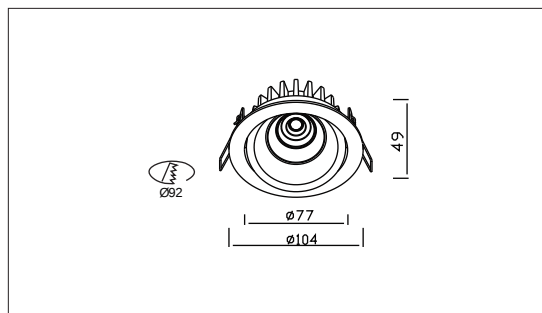

LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6 W
Driver Current	330 mA
Total Power	7.5 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	30 °/ 60 °

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	17 x 12.5 x 6 cm
Carton size:	39 x 35.5 x 26.5 cm
Pcs per carton:	24 pcs
Each carton :	0.037 m ³