


CATALOGUE


2016-2017 v2.0



KETAI

we love our lights, we enjoy our life

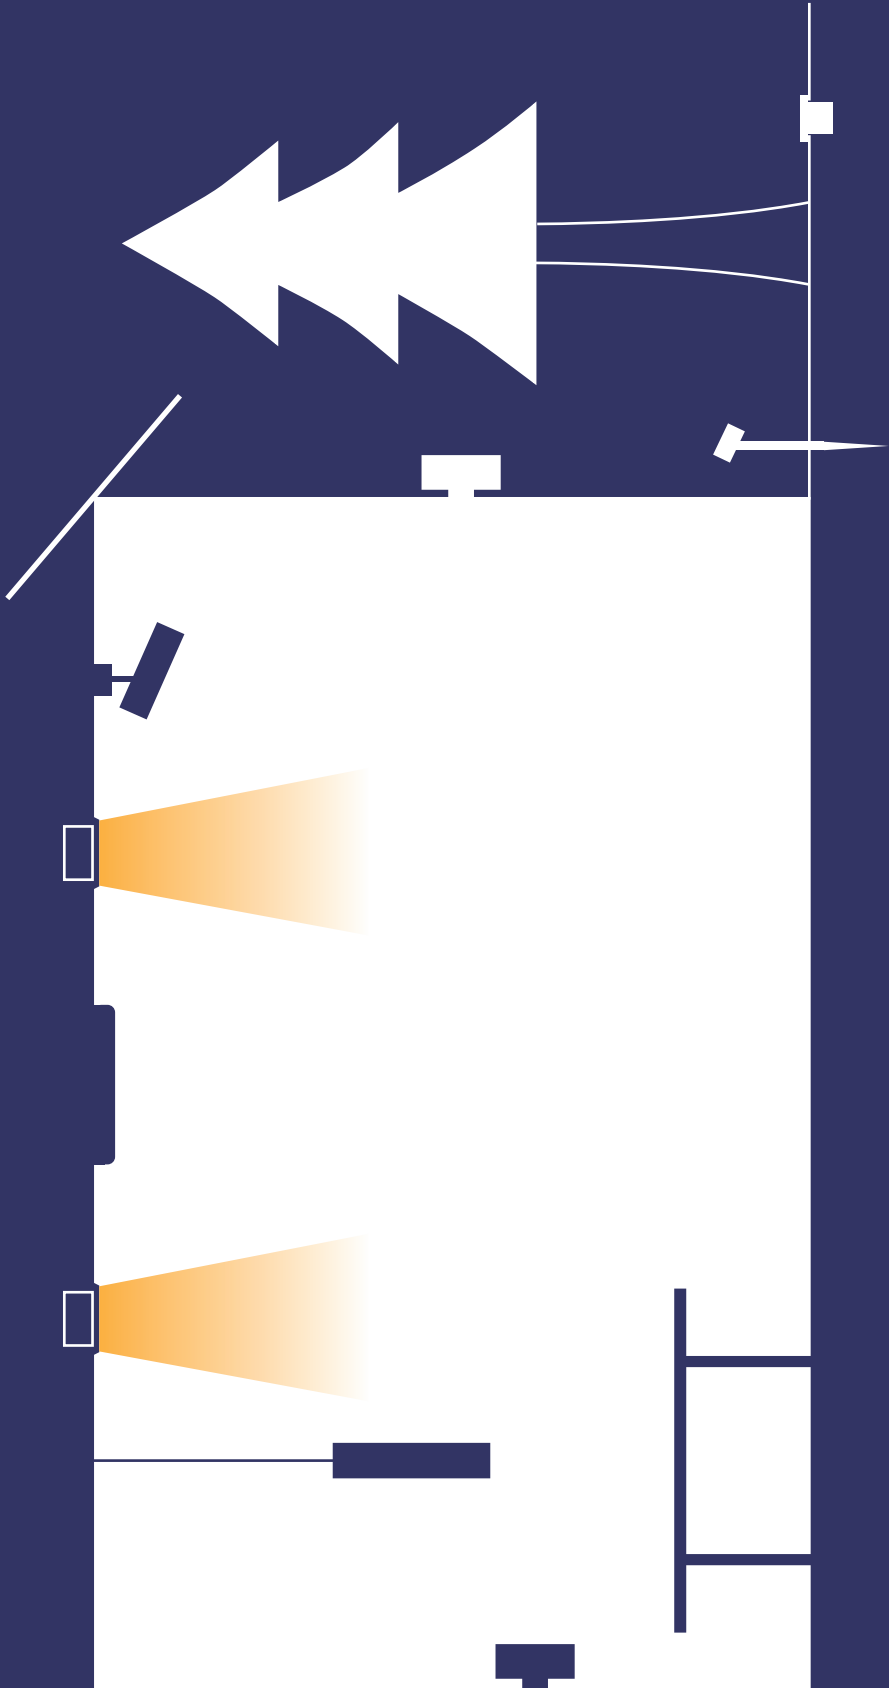

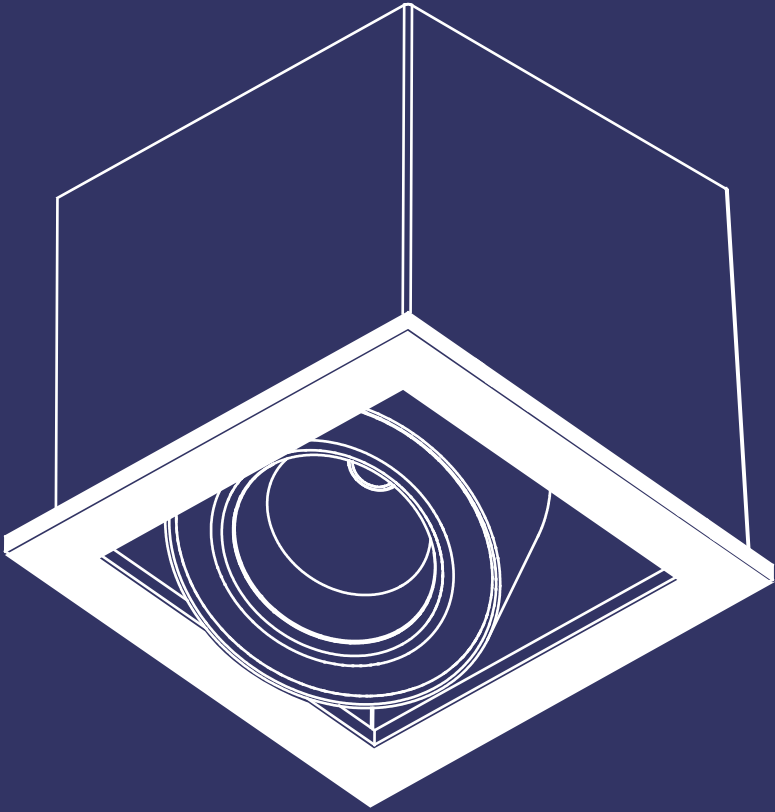

DOWN LIGHT

RECESSED DOWNLIGHT




CE RoHS

HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	30° 60°



KT6594



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

Φ76MM




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Φ96X52MM
 CUTOUT: Φ76MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6594-7.5W-3000K-30°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X330X260MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 7.5KG

RECESSED DOWNLIGHT



KT6596



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	30° 60°
	>90		4000K		




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: $\Phi 96 \times 52 \text{MM}$
 CUTOUT: $\Phi 76 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6596-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X330X260MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 7.5KG


RECESSED DOWNLIGHT



HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 60°



KT6594A



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 65
 OVERALL DIMENSION: $\Phi 96 \times 52 \text{MM}$
 CUTOUT: $\Phi 76 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 480LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6594A-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 360X330X260MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 8KG

RECESSED DOWNLIGHT



CE RoHS



KT6596A



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 65
 OVERALL DIMENSION: $\Phi 96 \times 52 \text{MM}$
 CUTOUT: $\Phi 76 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 480LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6596A-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 360X330X260MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 8KG


RECESSED DOWNLIGHT



KT6659-1



KT6659-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	30° 60°
----------	------------	-----	----------------	------	---------





Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 30°



KT6659-2-2x7.5W-3000K-30°


Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6659-1	6W	7.5W	680LM	550LM	Ø100MM	435X315X440MM	24	10KG
KT6659-2	2X6W	2X7.5W	1360LM	1100LM	200X100MM	515X465X400MM	24	19KG


RECESSED DOWNLIGHT



KT6648-1



KT6648-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	3000K CCT	4000K	BEAM	30° 60°
	>90				




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 30°



KT6648-2-2x7.5W-3000K-30°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6648-1	6W	7.5W	680LM	550LM	88X88MM	435X365X360MM	12	4.3KG
KT6648-2	2X6W	2X7.5W	1360LM	1100LM	188X88MM	390X275X365MM	12	8.5KG


RECESSED DOWNLIGHT



KT6647-1



KT6647-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	30° 60°
	>90		4000K		




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 30°




KT6647-2 -2X7.5W-3000K-30°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6647-1	6W	7.5W	680LM	550LM	96X96MM	435X345X440MM	12	12.5KG
KT6647-2	2X6W	2X7.5W	1360LM	1100LM	181X96MM	295X270X440MM	8	14.6KG

RECESSED DOWNLIGHT



KT6636

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	30° 60°
----------	------------	-----	----------------	------	---------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: $\Phi 104 \times 49 \text{MM}$
 CUTOUT: $\Phi 90 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6636-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 390X355X265MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 9.16KG

RECESSED DOWNLIGHT




HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 60°



KT6554

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: Ø110X45MM
 CUTOUT: Ø95MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6554-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 375X295X425MM
 PCS/CARTON: 30 PCS
 CARTON G.W.: 8.2KG


RECESSED DOWNLIGHT



CE RoHS

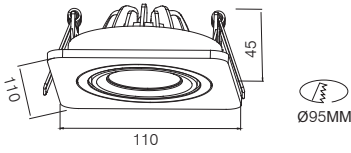

KT6662



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	30° 60°
----------	------------	-----	----------------	------	---------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: 110X110X75MM
 CUTOUT: Ø95MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6662-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 375X295X425MM
 PCS/CARTON: 30 PCS
 CARTON G.W.: 10.3KG

RECESSED DOWNLIGHT



HIGH CRI	>80
	>90
CCT	3000K 4000K
BEAM	30° 60°




KT6595

IP44

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 44
 OVERALL DIMENSION: Ø90X44MM
 CUTOUT: Ø80MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6595-7.5W-3000K-30°




Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 390X355X240MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 8.2KG


RECESSED DOWNLIGHT



KT6814-1



KT6814-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	30° 60°
----------	------------	-----	----------------	------	---------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 30°



KT6814-2 -2x7.5W-3000K- 30°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6814-1	6W	7.5W	680LM	550LM	Ø80MM	435X315X320MM	24	9.5KG
KT6814-2	2X6W	2X7.5W	1360LM	1100LM	80X170MM	465X275X320MM	12	10KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K 4000K
BEAM	30° 60°



KT6551

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: 81X81X75MM
 CUTOUT: Ø70MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6551-7.5W-3000K-30°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 320X255X430MM
 PCS/CARTON: 30 PCS
 CARTON G.W.: 13KG

RECESSED DOWNLIGHT



KT6550

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø84X75MM
 CUTOUT: Ø70MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6550-7.5W-3000K-30°



Photometric files for other CCT & beam are available





Standard Packing Information

CARTON BOX: 335X225X430MM
 PCS/CARTON: 30 PCS
 CARTON G.W.: 12.5KG


RECESSED DOWNLIGHT



KT6560-1

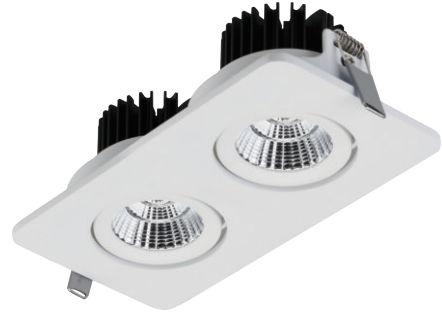

KT6560-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	30° 60°
	>90		4000K		




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 30°




KT6560-2-2x7.5W-3000K-30°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6560-1	6W	7.5W	630LM	550LM	Ø100MM	435X315X440MM	24	10KG
KT6560-2	2X6W	2X7.5W	1260LM	1100LM	200X100MM	515X465X400MM	24	19KG

RECESSED DOWNLIGHT



KT6826

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	15° 25° 38° 60°
----------	------------	-----	----------------	------	-----------------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: $\Phi 180 \times 79 \text{MM}$
 CUTOUT: $\Phi 165 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: EVERCORE
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 1400LM
 SYSTEM OUTPUT: 1100LM
 LED POWER: 14W
 SYSTEM POWER: 16W
 BEAM: 60°



KT6826-16W-3000K-60°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 620X415X380MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 15.7KG

RECESSED DOWNLIGHT




HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 60°



KT6577

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: Ø86X75MM
 CUTOUT: Ø78MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6577-7.5W-3000K-30°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 522X265X335MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 11.2KG

RECESSED DOWNLIGHT



KT6578

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	3000K CCT	4000K CCT	BEAM	30° 60°
	>90				




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: 100X100X75MM
 CUTOUT: Ø78MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6578-7.5W-3000K-30°

63.78 90.071 c	2.251	2.0811
681.3 10560 x	10	63.72cm
15.82 24.771 c	6.2621	4.1811
170.3 286.45 x	20	127.45cm
7.032 11.011 c	4.4494	6.2721
75.63 116.31 x	28	151.19cm
3.955 6.1221 c	17.121	8.3691
47.58 68.05 x	45	234.90cm
2.552 3.9629 c	16.41	10.421
27.25 42.49 x	44	218.82cm

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 540X275X335MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 15.6KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	15° 35°



KT6821

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: 90X90X84MM
 CUTOUT: 81X81MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 1100LM
 SYSTEM OUTPUT: 870LM
 LED POWER: 8W
 SYSTEM POWER: 11W
 BEAM: 35°



KT6821-11W-3000K-35°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X335X420MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 9.3KG

RECESSED DOWNLIGHT



KT6822

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	15° 35°
----------	------------	-----	----------------	------	---------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: Φ94X84MM
 CUTOUT: Φ85MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 1100LM
 SYSTEM OUTPUT: 870LM
 LED POWER: 8W
 SYSTEM POWER: 11W
 BEAM: 35°



KT6822-11W-3000K-35°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X335X420MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 9.6KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	85°



KT6564A

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: 82X82X79MM
 CUTOUT: 78X78MM




Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 530LM
 SYSTEM OUTPUT: 430LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 85°



KT6564A-7.5W-3000K-85°




Photometric Files For Other Cct & Beam Are Available



Standard Packing Information

CARTON BOX: 360X335X430MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 9.3KG

RECESSED DOWNLIGHT



KT6565A

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: Φ83X79MM
 CUTOUT: Φ78MM



Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 530LM
 SYSTEM OUTPUT: 430LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 85°

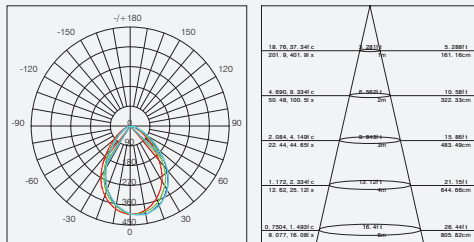

KT6565A-7.5W-3000K-85°

Photometric Files For Other Cct & Beam Are Available



Standard Packing Information

CARTON BOX: 360X335X430MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 9KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	30° 60°



KT6564

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: 82X82X79MM
 CUTOUT: 78X78MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6564-7.5W-3000K-30°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X335X430MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 9.3KG

RECESSED DOWNLIGHT



KT6565

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	30° 60°
----------	------------	-----	----------------	------	---------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: Φ83X79MM
 CUTOUT: Φ78MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6565-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 360X335X430MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 9KG


RECESSED DOWNLIGHT



KT6567-1



KT6567-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	18° 30°
----------	------------	-----	----------------	------	---------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 18°



KT6567-1 -26W-3000K-18°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6567-1	23W	26W	2300LM	1800LM	170X170MM	650X240X430MM	6	14KG
KT6567-2	2X23W	2X26W	4300LM	3500LM	170X320MM	475X375X220MM	2	10KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	18° 20°



KT6309


Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: Ø136X108MM
 CUTOUT: Ø125MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 1500LM
 SYSTEM OUTPUT: 1200LM
 LED POWER: 14W
 SYSTEM POWER: 16W
 BEAM: 18°



KT6309-16W-3000K-18°

710.8 11007° ±	2.281°	0.790291
703.1 11660° ±		23.06cm
177.7 225.46° ±	2.5601°	1.3111
1612.2985° ±		46.54cm
79.97 127.91° ±	4.4444°	2.28561
850.1 1318° ±		69.06cm
44.42 68.89° ±	12.101°	3.02111
470.2 741.61° ±		92.06cm
28.43 44.00° ±	16.91°	3.77861
508.0 474.61° ±		119.10cm

Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 435 x 310 x 265MM
 PCS/CARTON: 12 PCS
 CARTON G.W.: 12KG

RECESSED DOWNLIGHT



CE RoHS



KT6327

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	18° 20°
	>90		4000K		




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø112X105MM
 CUTOUT: Ø95MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 1500LM
 SYSTEM OUTPUT: 1200LM
 LED POWER: 14W
 SYSTEM POWER: 16W
 BEAM: 18°



KT6327-16W-3000K-18°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 470X315X455MM
 PCS/CARTON: 18 PCS
 CARTON G.W.: 15KG

RECESSED DOWNLIGHT




HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	18° 20°



KT6574

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: 110X110X102MM
 CUTOUT: Ø100MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 1500LM
 SYSTEM OUTPUT: 1200LM
 LED POWER: 14W
 SYSTEM POWER: 16W
 BEAM: 18°



KT6574-16W-3000K-18°

450.32,469.15lx	283.5lx	0.82759lx
892.64391lx	567lx	21.25lx
133.33,162.46lx	850.5lx	1.4262lx
266.66,324.92lx	1701lx	55.97lx
45.02,57.16lx	2835lx	2.4845lx
484.6,574.81lx	5670lx	75.70lx
25.32,32.48lx	8505lx	3.311lx
272.6,436.91lx	17010lx	109.93lx
14.22,25.38lx	28350lx	4.338lx
174.5,279.67lx	56700lx	124.16lx


Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X245X460MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 19KG

RECESSED DOWNLIGHT



KT6580

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	18° 20°
	>90		4000K		




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø86X95MM
 CUTOUT: Ø78MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 1500LM
 SYSTEM OUTPUT: 1200LM
 LED POWER: 14W
 SYSTEM POWER: 16W
 BEAM: 18°



KT6580-12W-3000K-18°

650-0,443-510	0,254m	0,4073871
4300L-4300Llx		23,230cm
100-0,142-490	0,254m	1,05671
1000L-1000Llx		50,47cm
30-0,02-1400	0,254m	7,04801
484-0,270-814		35,750cm
25-0,01-5870	0,254m	3,31141
212-0,419-914		100,91cm
16-0,01-25,0870	0,254m	4,13921
174-0,270-47		128,14cm

Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 350X190X265MM
 PCS/CARTON: 18PCS
 CARTON G.W.: 18KG


RECESSED DOWNLIGHT



KT6583-1



KT6583-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI		>80	CCT	3000K 4000K	BEAM	10° 18°	24° 30°
		>90				40° 60°	




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 18°



KT6583-2-25W-3000K-18°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6583-1	22W	25W	1900LM	1500LM	Φ130MM	325X325X380MM	16	15KG
KT6583-2	2X22W	2X25W	3300LM	2600LM	280X130MM	425X360X325MM	6	13KG


RECESSED DOWNLIGHT



KT6584-1



KT6584-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	10° 18°	24° 30°
				BEAM	40° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 30°



KT6584-2-25W-3000K-30°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6584-1	22W	25W	1900LM	1500LM	Ø130MM	405X365X290MM	12	13KG
KT6584-2	2X22W	2X25W	3300LM	2600LM	280X130MM	435X360X290MM	6	13KG


RECESSED DOWNLIGHT



KT6585-1



KT6585-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	10° 18°
	>90		4000K		24° 30°
					40° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 30°




KT6585-25W-3000K-30°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6585-1	22W	25W	1900LM	1500LM	168X155MM	465X465X350MM	12	16KG
KT6585-2	2X22W	2X25W	3300LM	2600LM	310X168MM	465X400X320MM	6	17KG

RECESSED DOWNLIGHT



KT6347

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	37°
----------	------------	-----	----------------	------	-----




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø175X49MM
 CUTOUT: Ø165MM



Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 500LM
 SYSTEM OUTPUT: 400LM
 LED POWER: 9W
 SYSTEM POWER: 11W
 BEAM: 37°

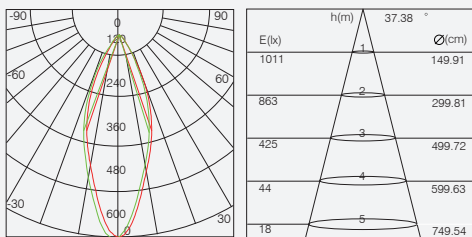

KT6347-11W-3000K-37°

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 395X385X390MM
 PCS/CARTON: 20 PCS
 CARTON G.W.: 17KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K 4000K
BEAM	18° 22° 30°



KT6347B

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

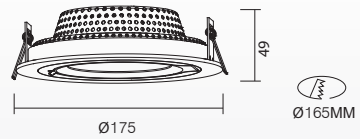


Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø175X49MM
 CUTOUT: Ø165MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 220-240V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 2200LM
 SYSTEM OUTPUT: 1800LM
 LED POWER: 17W
 SYSTEM POWER: 20W
 BEAM: 22°



KT6347B-20W-3000K-22°

h(m)	22.52°	Ø(cm)
1556	1	39.82
309	2	75.65
270	3	119.47
97	4	159.30
62	5	199.12

Photometric files for other CCT & beam are available



Standard Packing Information



CARTON BOX: 395X385X390MM
 PCS/CARTON: 20 PCS
 CARTON G.W.: 17.3KG

RECESSED DOWNLIGHT



KT6344-1

KT6344-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	18° 30°
-----------------	------------	------------	----------------	-------------	---------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80/90
 BEAM: 18°



KT6344-12W-3000K-18°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6344-1	12W	16W	1500LM	1200LM	150X150MM	405X335X425MM	12	13.6KG
KT6344-2	2X12W	2X16W	2800LM	2300LM	275X150MM	405X315X425MM	6	12.4KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	24° 36°



KT6355A

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

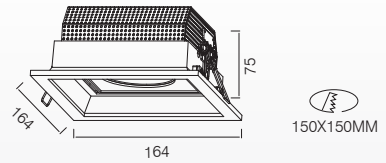


Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: 164X164X75MM
 CUTOUT: 150X150MM



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 1800LM
 SYSTEM OUTPUT: 1500LM
 LED POWER: 18W
 SYSTEM POWER: 20W
 BEAM: 24°



87.63, 148.25	2500	3.2800
945.2, 15311.4	1m	71.850cm
31.91, 325.090	5.8400	4.7130
235.8, 382.8	20cm	143.84cm
9.726, 15.809	9.8400	7.0990
104.8, 170.11	30cm	215.46cm
5.477, 8.8909	19.1200	9.4290
58.95, 95.69	60cm	287.28cm
3.305, 5.899	18.91	11.390
37.73, 61.24	60cm	259.10cm



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 465X405X320MM
 PCS/CARTON: 16 PCS
 CARTON G.W.: 14KG

RECESSED DOWNLIGHT

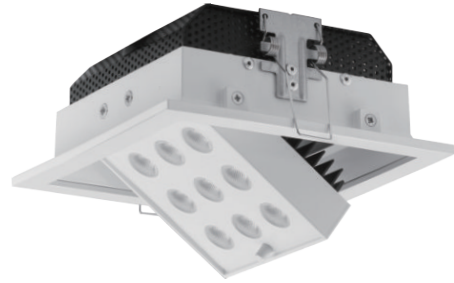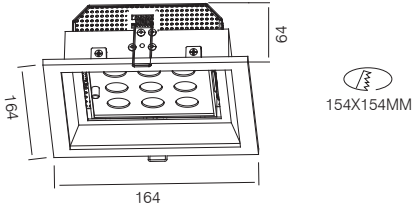

KT6355

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: 164X164X64MM
 CUTOUT: 154X154MM




Standard Optical & Electrical Characteristics

LED BRAND: CREE
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 1000LM
 SYSTEM OUTPUT: 850LM
 LED POWER: 9W
 SYSTEM POWER: 12W
 BEAM: 25°



KT6355-12W-3000K-25°



Photometric Files For Other Cct & Beam Are Available



Standard Packing Information

CARTON BOX: 465X405X320MM
 PCS/CARTON: 16 PCS
 CARTON G.W.: 13.6KG

RECESSED DOWNLIGHT



KT6631




KT6632




KT6633




KT6634




BEAM: 28°



BEAM: 24°



BEAM: 24°



BEAM: 28°

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: CITIEZN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6631	9W	11W	1080LM	900LM	Ø100MM	465X405X340MM	24	8.2KG
KT6632	14W	17W	1680LM	1400LM	Ø120MM	540X455X305MM	18	9.1KG
KT6633	22W	26W	2400LM	2000LM	Ø145MM	455X415X305MM	12	8.8KG
KT6634	34W	40W	3600LM	3000LM	Ø185MM	425X220X420MM	6	7.6KG

RECESSED DOWNLIGHT



KT6664




KT6653




KT6654




KT6655




BEAM: 90°



BEAM: 90°



BEAM: 90°



BEAM: 90°

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	3000K CCT	4000K
	>90		



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6664	6W	7W	570LM	450LM	Ø100MM	465X405X340MM	24	8.7KG
KT6653	12W	15W	1100LM	900LM	Ø120MM	540X455X305MM	18	9.4KG
KT6654	20W	22W	1900LM	1500LM	Ø145MM	455X415X305MM	12	8.9KG
KT6655	40W	45W	3200LM	2600LM	Ø185MM	505X295X350MM	6	8KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	38°



KT6613

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: Ø82X73MM
 CUTOUT: Ø76MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 38°



KT6613-7.5W-3000K-38°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 360X335X365MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 7KG

RECESSED DOWNLIGHT



CE RoHS



KT6614

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	35°
----------	------------	-----	----------------	------	-----




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: $\Phi 109 \times 73 \text{MM}$
 CUTOUT: $\Phi 102 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 35°



KT6614-7.5W-3000K-35°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 410X210X255MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 11KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	30°



KT6598

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: Ø87X73MM
 CUTOUT: Ø60MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6598-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 330X315X280MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 4.5KG

RECESSED DOWNLIGHT



CE RoHS



KT6599

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	30°
----------	------------	-----	----------------	------	-----




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø78X71MM
 CUTOUT: Ø69MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6599-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 400X400X180MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 5KG


RECESSED DOWNLIGHT



FT210



FT210C



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	110°
----------	------------	-----	----------------	------	------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 110°



FT210-3W-3000K-110°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
FT210	2W	3W	150LM	120LM	Ø60MM	580X580X170MM	200	19KG
FT210C	2W	3W	150LM	120LM	NO	580X580X170MM	200	20KG


RECESSED DOWNLIGHT




CE RoHS



FT211



FT211C



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	110°
----------	------------	-----	----------------	------	------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 110°



FT211-3W-3000K-110°



Photometric files for other CCT & beam are available


ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
FT211	2W	3W	150LM	120LM	60X60MM	580X580X170MM	200	22KG
FT211C	2W	3W	150LM	120LM	NO	580X580X170MM	200	23KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	25°

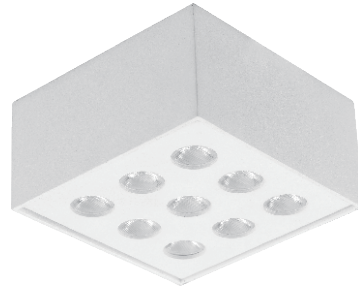

KT6808A

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

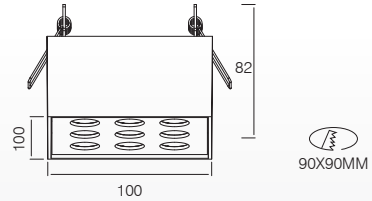


Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: 100X100X82MM
 CUTOUT: 90X90MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 1000LM
 SYSTEM OUTPUT: 850LM
 LED POWER: 9W
 SYSTEM POWER: 12W
 BEAM: 50°



KT6808A-12W-3000K-25°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 520X265X335MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 15.6KG

RECESSED DOWNLIGHT



CE RoHS



KT6808B

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	24° 36°
-------------	------------	-----	----------------	------	---------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: 100X100X82MM
 CUTOUT: 90X90MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 1500LM
 SYSTEM OUTPUT: 1200LM
 LED POWER: 14W
 SYSTEM POWER: 16W
 BEAM: 24°



KT6808B-16W-3000K-24°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 520X265X335MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 13KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	24° 36°



KT6808C

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

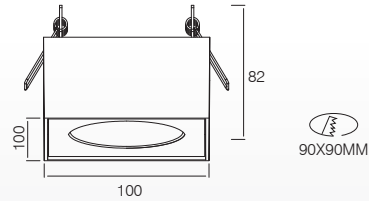


Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: 100X100X82MM
 CUTOUT: 90X90MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 1250LM
 SYSTEM OUTPUT: 1000LM
 LED POWER: 14W
 SYSTEM POWER: 16W
 BEAM: 24°



KT6808C-16W-3000K-24°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 520X265X335MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 13.4KG

RECESSED DOWNLIGHT





CE RoHS



KT6679-1

KT6679-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	25°
----------	------------	-----	----------------	------	-----




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50HZ
 CCT: 3000K
 CRI: >80
 BEAM: 25°



KT6679-2X43W-3000K-25°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6679-1	38W	43W	3500LM	2800LM	225X225MM	585X295X425MM	6	12KG
KT6679-2	2X38W	2X43W	7100LM	5700LM	420X225MM	495X295X560MM	4	16KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	25°



KT6667

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 198 \times 133 \text{MM}$
CUTOUT: $\Phi 185 \text{MM}$



Standard Optical & Electrical Characteristics


LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 3500LM
SYSTEM OUTPUT: 2800LM
LED POWER: 38W
SYSTEM POWER: 43W
BEAM: 25°



Standard Packing Information

CARTON BOX: 495X250X470MM
PCS/CARTON: 6 PCS
CARTON G.W.: 15KG

RECESSED DOWNLIGHT



KT6673

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	25°
----------	------------	-----	----------------	------	-----




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø217X158MM
 CUTOUT: Ø206MM



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 3500LM
 SYSTEM OUTPUT: 2800LM
 LED POWER: 38W
 SYSTEM POWER: 43W
 BEAM: 25°



KT6673-43W-3000K-25°

897.7 14711 G	Ø 251.0	1.245F1
10000.130031 G	Ø 251.0	37.96cm
234.0 357.71 G	Ø 360.0	2.49111
2503.30081 G	Ø 360.0	75.92cm
104.0 185.41 G	Ø 469.0	3.72811
1121.17591 G	Ø 469.0	113.85cm
58.41 91.927 G	Ø 578.0	4.98111
630.0 949.51 G	Ø 578.0	151.85cm
37.51 58.831 G	Ø 687.0	6.22711
402.7 633.31 G	Ø 687.0	189.79cm

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 535X270X545MM
 PCS/CARTON: 6 PCS
 CARTON G.W.: 16KG

RECESSED DOWNLIGHT




HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15° 25°



KT6697

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: $\Phi 180 \times 87 \text{MM}$
 CUTOUT: $\Phi 170 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 4000LM
 SYSTEM OUTPUT: 3200LM
 LED POWER: 38W
 SYSTEM POWER: 40W
 BEAM: 25°



KT6697-40W-3000K-25°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 435X435X320MM
 PCS/CARTON: 12 PCS
 CARTON G.W.: 13KG

RECESSED DOWNLIGHT



KT6698

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	15° 25°
	>90		4000K		
	>95				



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 180 \times 100 \text{MM}$
CUTOUT: $\Phi 170 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 4000LM
SYSTEM OUTPUT: 3200LM
LED POWER: 38W
SYSTEM POWER: 40W
BEAM: 25°



Standard Packing Information

CARTON BOX: 475X435X365MM
PCS/CARTON: 12PCS
CARTON G.W.: 16KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	15° 25°



KT6696

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: $\Phi 146 \times 131 \text{MM}$
 CUTOUT: $\Phi 115 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 4000LM
 SYSTEM OUTPUT: 3200LM
 LED POWER: 38W
 SYSTEM POWER: 40W
 BEAM: 25°



KT6696-40W-3000K-25°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 435X435X440MM
 PCS/CARTON: 12 PCS
 CARTON G.W.: 15KG


RECESSED DOWNLIGHT




KT16-1



KT16-2



KT16-3



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	90°
----------	------------	-----	----------------	------	-----




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 90°



KT16-1-8W-3000K-90°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT16-1	7W	8W	630LM	500LM	Φ75MM	520X255X350MM	50	21.5KG
KT16-2	2X7W	2X8W	1400LM	1100LM	2XΦ75MM	500X435X280MM	32	21.8KG
KT16-3	3X7W	3X8W	1900LM	1500LM	3XΦ75MM	500X335X415MM	24	25.6KG

RECESSED DOWNLIGHT



HIGH CRI	>80
	>90
CCT	3000K 4000K
BEAM	40°




KT6815



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: Ø112X73MM
 CUTOUT: Ø100MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
 INPUT: 220-240V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 760LM
 SYSTEM OUTPUT: 610LM
 SYSTEM POWER: 8W
 BEAM: 40°



KT6815-8W-3000K-40°



Photometric files for other CCT & beam are available



Standard Packing Information



CARTON BOX: 360X335X420MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 12.5KG

RECESSED DOWNLIGHT



KT6816-1 

KT6816-2 

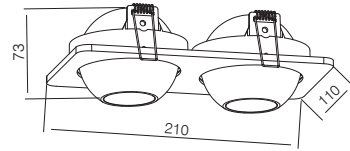

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	3000K CCT	4000K CCT	BEAM	40°
	>90				




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
 INPUT: 220-240V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 40°



KT6816-1-8W-3000K-40°



Photometric files for other CCT & beam are available

ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6816-1	8W	760LM	610LM	Φ100MM	425X425X515MM	24	12KG
KT6816-2	2X8W	1520LM	1220LM	200X100MM	425X425X515MM	12	11.5KG

RECESSED DOWNLIGHT




HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 50°



KT6817

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø98X73MM
 CUTOUT: Ø70MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 780LM
 SYSTEM OUTPUT: 620LM
 LED POWER: 7W
 SYSTEM POWER: 10W
 BEAM: 30°



KT6817-10W-3000K-30°

87.70, 133.30°	2.250 f	1.9880 lx
84.4, 0.14320°	2.000 f	47.78cm
21.80, 33.30°	3.1250 f	3.1250 lx
236.0, 358.81°	3.000 f	95.57cm
9.744, 14.812°	4.0000 f	4.7020 lx
104.9, 150.51°	4.000 f	143.35cm
5.481, 8.333°	5.0000 f	6.2710 lx
59.00, 89.89°	5.000 f	191.13cm
3.268, 5.333°	6.0000 f	7.8520 lx
37.75, 51.402°	6.000 f	238.90cm


Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X335X420MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 12KG

RECESSED DOWNLIGHT



KT6818

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: 98X98X73MM
 CUTOUT: 70X70MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 780LM
 SYSTEM OUTPUT: 620LM
 LED POWER: 7W
 SYSTEM POWER: 10W
 BEAM: 30°



KT6818-10W-3000K-30°

87.70, 133.31 c	23.14	1.5681
344.0, 1425 x	30	47.76cm
21.93, 33.23 c	8.3628 c	3.1351
238.0, 308.8 x	30	95.52cm
9.746, 14.811 c	0.8484 c	4.7281
104.9, 155.51 x	30	143.35cm
3.481, 5.3331 c	19.191 c	6.2711
59.05, 89.68 x	30	191.15cm
3.308, 5.3331 c	18.41	7.8381
57.78, 57.45 x	30	238.92cm

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X330X260MM
 PCS/CARTON: 24PCS
 CARTON G.W.: 12.5KG

RECESSED DOWNLIGHT



CE RoHS




HIGH CRI	>80
	>90
CCT	3000K 4000K
BEAM	48°





KT6925

Trim Finish Optional:



- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005





KT6926





KT6929





KT6927



KT6930



KT6928





Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL9016

IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: CREE


DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ


CCT: 3000K

CRI: > 80

BEAM: 48°




KT6925-3W-3000K-48°



Photometric files for other CCT & beam are available

ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6925	3W	212LM	170LM	45X44MM	375x305x375mm	100	12KG
KT6926	6W	412LM	330LM	45X74MM	475x400x425mm	100	18KG
KT6927	8W	600LM	480LM	45X104MM	475x400x275mm	50	13KG
KT6928	11W	930LM	745LM	45X134MM	475x400x335mm	50	16KG
KT6929	13W	1160LM	930LM	45X164MM	475x400x395mm	50	19KG
KT6930	16W	1450LM	1160LM	45X174MM	475x400x415mm	50	22KG

RECESSED DOWNLIGHT



KT6899 Ø83XH80MM

KT6900 Ø110XH110MM

KT6901 Ø150XH130MM

*** AC As Optional**

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: LUMINUS
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6899	12W	15W	1300LM	1050LM	Ø76MM	500X255X380MM	24	6KG
KT6900	28W	30W	2600LM	2100LM	Ø100MM	435X295X505MM	24	12KG
KT6901	37W	40W	3500LM	2800LM	Ø135MM	555X395X230MM	12	18KG

RECESSED DOWNLIGHT



KT6902 82X82XH80MM

KT6903 110X110XH115MM

KT6904 150X150XH136MM

AC As Optional

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	90°
----------	------------	-----	----------------	------	-----



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20



Standard Optical & Electrical Characteristics


LED BRAND: LUMINUS
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6902	12W	15W	1300LM	1050LM	76X76MM	500X255X380MM	24	6KG
KT6903	28W	30W	2600LM	2100LM	100X100MM	465X315X545MM	24	12KG
KT6904	37W	40W	3500LM	2800LM	135X135MM	585X395X665MM	24	18KG

RECESSED DOWNLIGHT



CE RoHS



KT6905 Ø110XH105MM

KT6906 Ø150XH120MM



AC As Optional

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6905	28W	30W	2600LM	2100LM	Ø100MM	465X315X505MM	24	12KG
KT6906	37W	40W	3500LM	2800LM	Ø135MM	555X395X470MM	18	14KG

RECESSED DOWNLIGHT



KT6566

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	18° 30° 60°
----------	------------	-----	----------------	------	-------------




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: Ø125X126MM
 CUTOUT: Ø115MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 2200LM
 SYSTEM OUTPUT: 1770LM
 LED POWER: 23W
 SYSTEM POWER: 26W
 BEAM: 18°



KT6566-26W-3000K-18°

h (m)	20.58°	Ø (cm)
1		25.59
2		51.18
3		76.76
4		102.35
5		127.94

Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 480X325X345MM
 PCS/CARTON: 12PCS
 CARTON G.W.: 14.6KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K 4000K
BEAM	36°

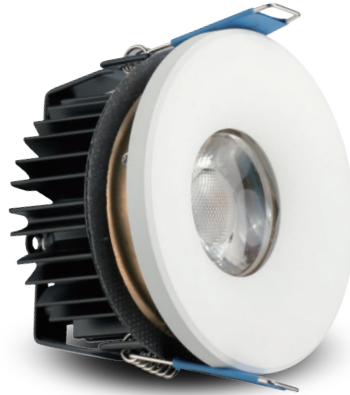

KT6830

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 65
 OVERALL DIMENSION: Ø98X73MM
 CUTOUT: Ø70MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
 INPUT: 120V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 710LM
 SYSTEM OUTPUT: 570LM
 LED POWER: 7W
 SYSTEM POWER: 8W
 BEAM: 36°



KT6830-8W-3000K-36°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 520X270X275XMM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 9.1KG


RECESSED DOWNLIGHT



KT6912-3




KT6912-2



TRIMLESS



KT6912-1



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: OSRAM
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 BEAM: 30°

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN
KT6912-1	28W	30W	2800LM	2225LM	151X149mm	640x440x530mm	24
KT6912-2	2X28W	2X30W	5560LM	4450LM	301X149mm	640X440X530mm	12
KT6912-3	3X28W	3X30W	8300LM	6675LM	451X149mm	640X505X530mm	8

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	56°



KT6897

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: $\Phi 109 \times 77 \text{MM}$
 CUTOUT: $\Phi 95 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 56°



KT6897-7.5W-3000K-56°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 435X275X420MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 10.3KG

RECESSED DOWNLIGHT



KT6883

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	17°
----------	------------	-----	----------------	------	-----




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: Ø95X72MM
 CUTOUT: Ø88MM



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: PHILIPS
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 880LM
 SYSTEM OUTPUT: 710LM
 LED POWER: 8W
 SYSTEM POWER: 10W
 BEAM: 17°



KT6883-10W-3000K-17°

244,3x,392,17lx	282lx	5,8032lx
1435x,1113lx	175lx	28,1306lx
61,59x,90,30lx	8,3402lx	5,021lx
407,4x,1020lx	35lx	56,406lx
21,14x,41,45lx	6,9497lx	2,7782lx
250,7x,457,01lx	40lx	84,406lx
11,87x,21,88lx	1,9712lx	3,7016lx
144,4x,257,01lx	40lx	112,806lx
8,779x,15,28lx	11,747lx	4,4042lx
100,2x,184,33lx	40lx	141,706lx

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 375X255X285MM
 PCS/CARTON: 18 PCS
 CARTON G.W.: 12.5KG

RECESSED DOWNLIGHT




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	21°



KT6884

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



Φ150




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Φ 150X120MM
 CUTOUT: Φ143MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: PHILIPS
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 2500LM
 SYSTEM OUTPUT: 2000LM
 LED POWER: 18W
 SYSTEM POWER: 20W
 BEAM: 21°



KT6884-20W-3000K-21°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 330X330X435MM
 PCS/CARTON: 12 PCS
 CARTON G.W.: 13.5KG

RECESSED DOWNLIGHT



KT6885

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: Ø1185X145MM
 CUTOUT: Ø178MM



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: PHILIPS
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 3800LM
 SYSTEM OUTPUT: 3040LM
 LED POWER: 36W
 SYSTEM POWER: 38W
 BEAM: 15°



KT6885-38W-3000K-15°

Ø30, Ø 13811 c	2814	Ø 85397
10540, 14888 x	25	96,0m
Ø33, Ø 045, 31 c	Ø 3628 c	1, 70591
2410, 2719 x	25	91,96cm
Ø36, Ø 103, 31 c	Ø 4888 c	2, 36751
1116, 1650 x	40	77,93cm
Ø39, Ø1, Ø6, 331 c	Ø 6181 c	3, 40981
507, Ø 929, 21 x	60	103,91cm
Ø42, Ø2, Ø6, 251 c	Ø 7411 c	4, 26201
401, 7, 994, 71 x	80	129,89cm

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 400X400X355MM
 PCS/CARTON: 8 PCS
 CARTON G.W.: 12.3KG


RECESSED DOWNLIGHT



HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	21°




H6594F



battery can last 3-4 hours

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Φ 180X63MM
 CUTOUT: Φ 165MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: PHILIPS
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6594-7.5W-3000K-30°

81.28, 93.87°	28.10	2.000 l
600.6, 1008.4	11°	01.13mm
10.34, 23.42°	18.86	4.011 l
165.2, 252.11	31°	122.24mm
6.419, 10.41°	10.94	6.010 l
73.40, 112.04	31°	183.36mm
3.836, 5.805°	15.18	6.021 l
41.29, 63.02	31°	244.47mm
2.455, 3.747°	16.41	10.02 l
26.43, 40.33	31°	305.36mm


Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 415X415X340MM
 PCS/CARTON: 16 PCS
 CARTON G.W.: 12.3KG

RECESSED DOWNLIGHT



KT6915

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	28°
----------	------------	-----	----------------	------	-----




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL9016
 IP: 20
 OVERALL DIMENSION: Ø90X50MM
 CUTOUT: Ø80MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
 DRIVER BRAND: TRIDONIC
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: > 80
 LED OUTPUT: 960LM
 SYSTEM OUTPUT: 770LM
 LED POWER: 7W
 SYSTEM POWER: 8W
 BEAM: 28°



KT6915-8W-3000K-28°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 375x350x425MM
 PCS/CARTON: 30 PCS
 CARTON G.W.: 9.3KG

RECESSED DOWNLIGHT



HIGH CRI	>80
	>90
CCT	3000K 4000K
BEAM	110°




KT6845B

AC As Optional

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



Ø365MM




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø356X109MM
 CUTOUT: Ø365MM



Standard Optical & Electrical Characteristics

LED BRAND: EDISON
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 2400LM
 SYSTEM OUTPUT: 1920LM
 LED POWER: 26W
 SYSTEM POWER: 30W
 BEAM: 110°



KT6845C-30W-3000K-110°

15.09 48.852°	3.2811	9.3431
152.4 323.41°	100	254.78cm
3.372 12.161°	3.6624	18.891
42.50 150.81°	100	249.04cm
1.676 6.402°	3.6624	28.021
18.04 58.155°	100	254.34cm
0.9430 3.639°	18.1271	37.371
10.15 32.711°	100	159.13cm
0.6035 1.947°	16.41	46.721
6.496 20.941°	100	142.97cm

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 395X395X540MM
 PCS/CARTON: 4 PCS
 CARTON G.W.: 6.1KG



KETAI INDUSTRIES LIGHTING CO., LTD.

Tel: +86 757 8560 7707 Email: sales@ketailighting.com

Fax: +86 757 8563 3675 Website: www.ketailighting.com

4 Mashe New Street, Lishui, Nanhai, Foshan, Guangdong,
China 528244