

CATALOGUE

2016-2017 v2.0



KETAI

we love our lights, we enjoy our life


KETAI®

we love our lights, we enjoy our life

WHAT WE OFFER



A LARGE VARIETY OF LIGHTING FIXTURES ALL IN KETAI

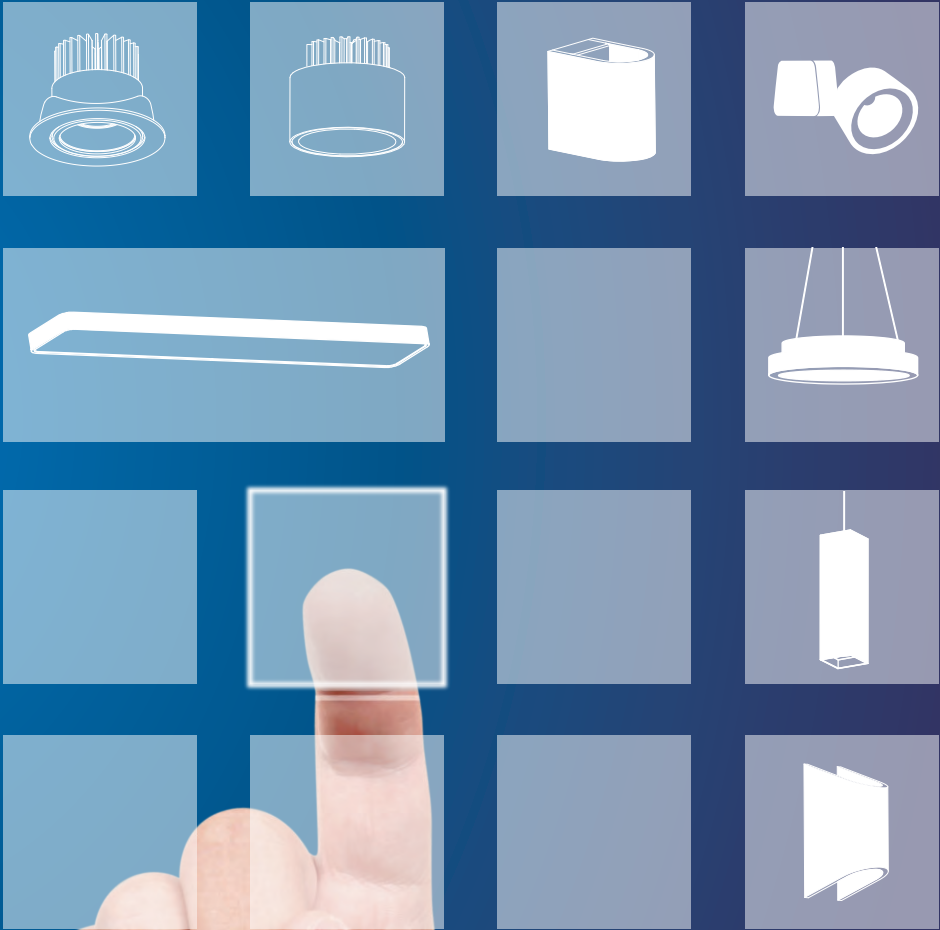

WHO ARE WE

WE LOVE TO WORK & WE LOVE WHERE WE WORK

Ketai Industries Lighting Co.,Ltd. was set up in 1999 by Brothers Daniel and David, focusing on development and production of the top level commercial lighting products, and having developed thousands of interior and exterior lighting fixtures, including all kinds of led downlights, led wall lighttrack lights, pendant lights, offering you one stop solution of lighting project.



We currently have over 40000 square meters standard industrial production buildings and more than 500 professional staff. Our annual turnover has been over 100 million RMB. And we have set up our own R & D centre and have our own Aluminium alloy die-casting, metal surface spraying, mould processing, metal pressing LED electronic processing and end product assembling factories and can offer unique design and production service to our clients, response and solve the issues come up in the engineering and designing ODM products promptly.

We are ISO9001 certified manufacturer and most of our products are approved with CE, CB, UL, SAA, GS, TUV and CCC certifications. The quality of our products is assured by our implementing QS ERP system and well-equipped testing lab. With more than 18 years experience in lighting fixture exporting field, our market has covered Europe South America and Mid-East.

The R&D Department has 19 engineers and they independently research and develop more new products each year. Our engineers have the comprehensive ability of structure development, optical design, thermal design to meet customers' various demands.

The Export sales representatives are on the way for you. Service for our business partners is a great priority with us and will also be intensified in the future. The young and committed team is always endeavoured with our business partners to achieve the very best results for your projects.




- 18 years' experience in lighting industry;
- 400 employees;
- 40k sqm fully owned factory;
- 20 R&D department;
- 20 professional and well experienced sales team to easy your order;
- The production status report every week as your request;
- 40 IQC & FQC / 10 QA team to assurance your products' quality;
- ISO 9001, ERP system, professional QC system, CE, ROHS, SAA certificates.
- Well equipped laboratory,
- Top level of organization, production, customer service and marketing;
- Very well equipped production lines: 26 sets of punching machines, 2 painting lines, series of CNC machines and others;
- 30 million USD export turnout every year.

Learn more, please visit our website >> www.ketailighting.com

WHO WE SELL

WANT TO GROW YOUR LIGHTING BUSINESS FASTER


BE OUR PARTNER NOW!

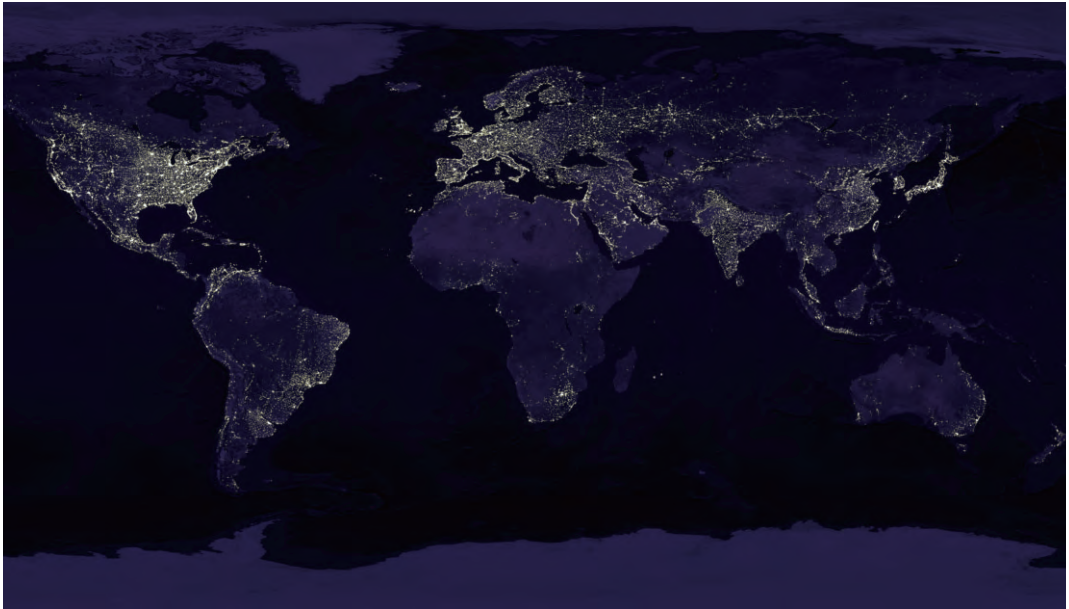

EACH COUNTRY, KETAI SELL ONLY TO ONE DISTRIBUTOR, WE ARE FOCUS ON BUSINESS PARTNERSHIP, IF YOU ARE PROFESSIONAL IN LIGHTING MARKET AND LOOKING FOR A RELIABLE SUPPLIER FROM CHINA, THEN WE ARE THE ONE.

3 WAYS OF BEING OUR PARTNER

1. Be our "ketai" or "leddare" brand exclusive distributor in your region
2. Be our oem exclusive distributor, but print "manufactured by ketai" on the color box
3. Just be our oem exclusive distributor in your region

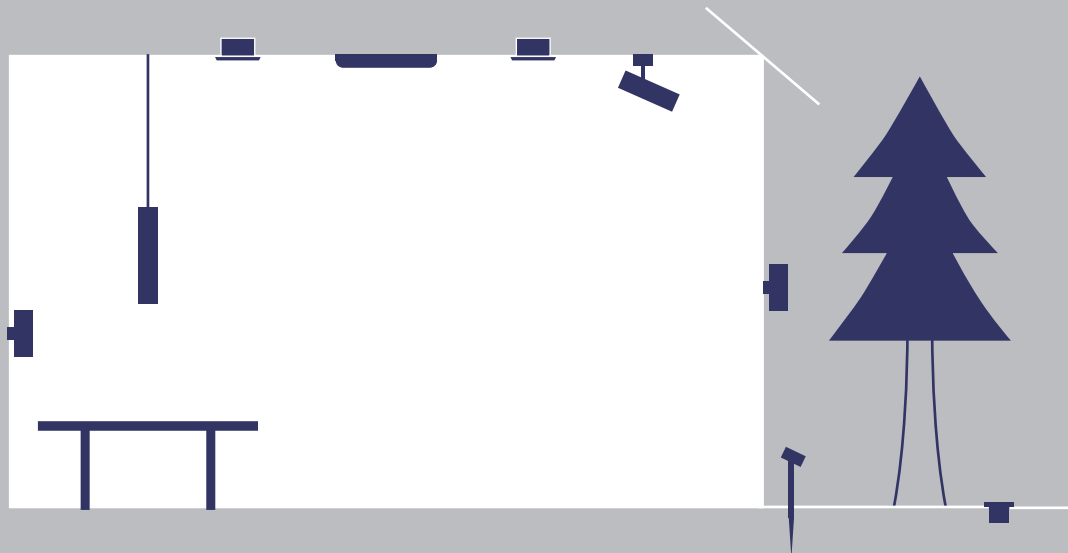

HOTELS



INDUSTRY



RESIDENT



MEDICAL



OFFICES



RETAIL



PUBLIC

HISTORY OF COMPANY DEVELOPMENT

FEBRUARY 2001
BUILDING
INTERNATIONAL
MARKET

2001

MAY 2005
THE KETAI NEW
HEADQUARTER
BUILDING
COMPLETED

2005

REACH
30 MILLION USD
TURNOVER
ANNUAL

2008

LISTED AS
CITY LIGHTING
PROJECT
SUPPLIER BY
GOVERNMENT

2014

START NEW
BRAND
MARKETING

2016

1999

MARCH 1999
COMPANY
WAS FOUNDED

2004

LISTED AS
A CLASS
TAXPAYER BY
GOVERNMENT

2006

IMPLEMENT
ERP & ISO
SYSTEM
MANAGEMENT


2011

IMPLEMENT
6S PRODUCTION
MANAGEMENT
SYSTEM
BE AWARDED AS
"HIGH AND NEW
TECH ENTERPRISES
OF GUANGDONG"

2015

CARRY OUT
OUR CHANNEL
DISTRIBUTION
PROGRAMME IN
EUROPE

MANUFACTURING PROCESS

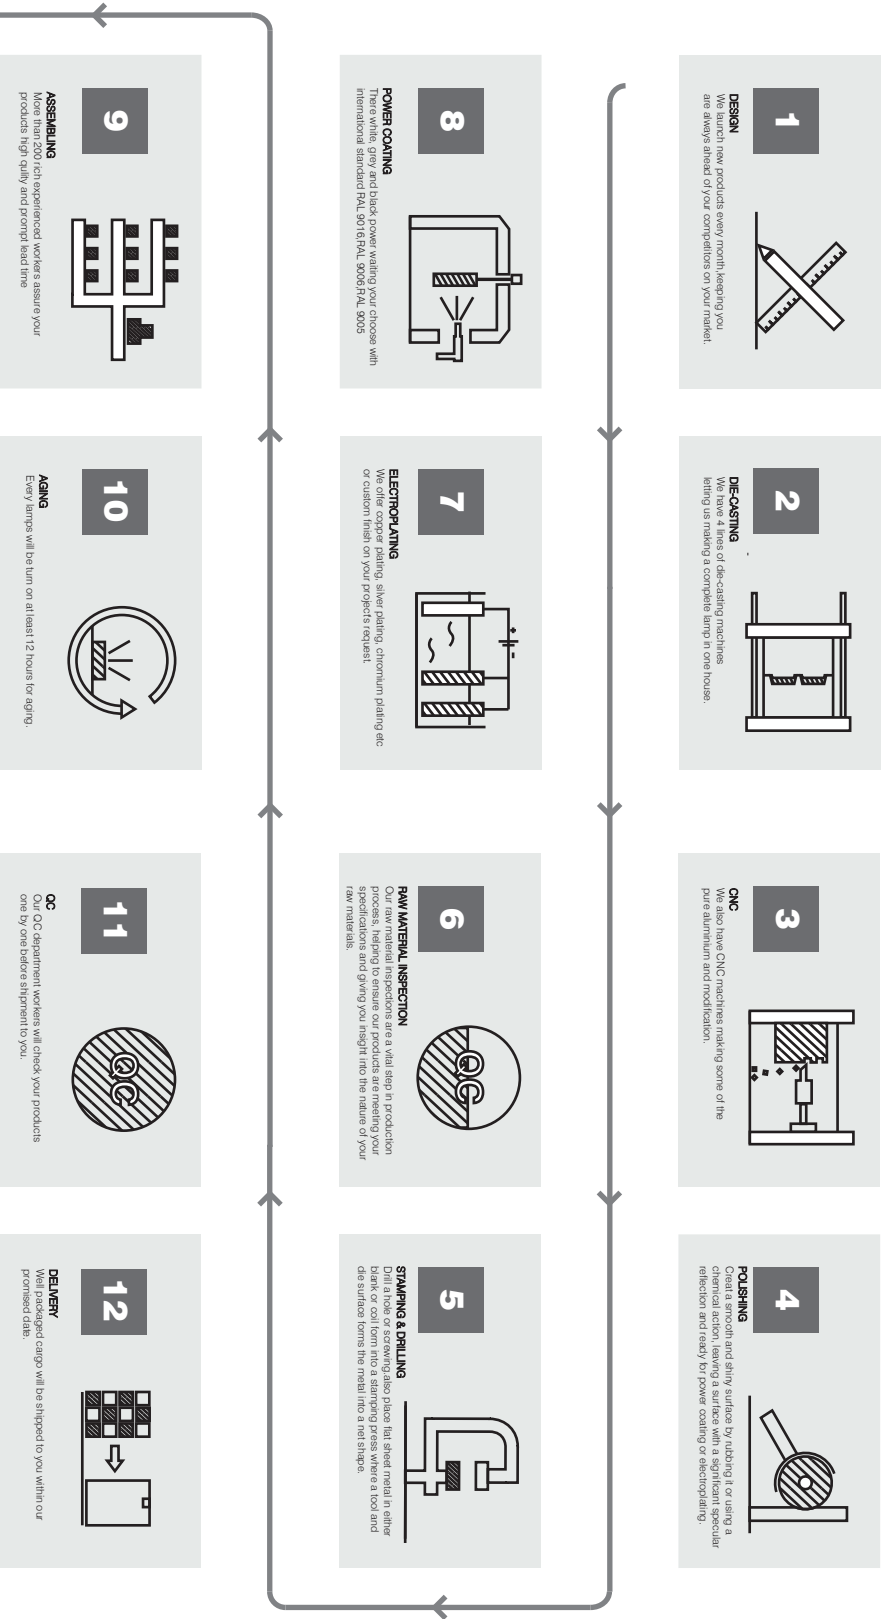


LED HEATSINK


EXTRUSIONS ALUMINIUM

Manufacturing Process


A billet of aluminum is heated to temperatures in excess of 900°F. Next, the billet is pressed and drawn through a die of the desired cross section by a rod with up to 22 tons of force. The extrusion is then manually pulled through the opposite end and cooled. In the final stage, the extrusion is cut to the requested length. At this point secondary processes are then performed.

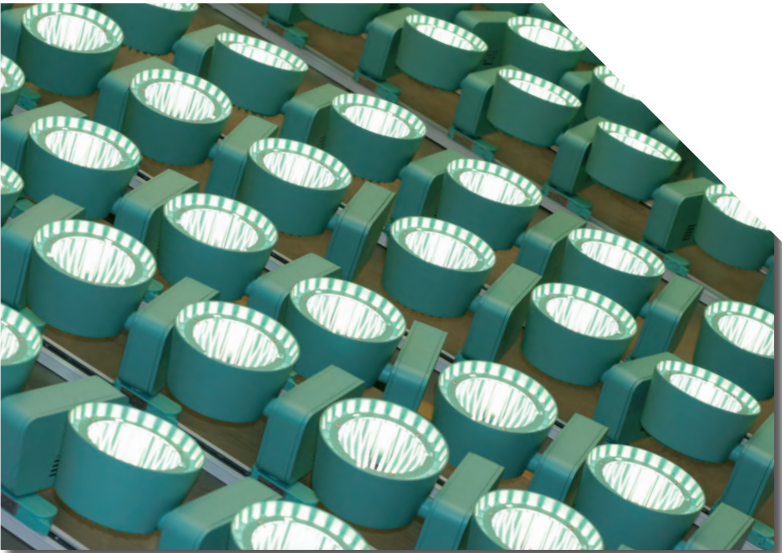

TOOLING COST

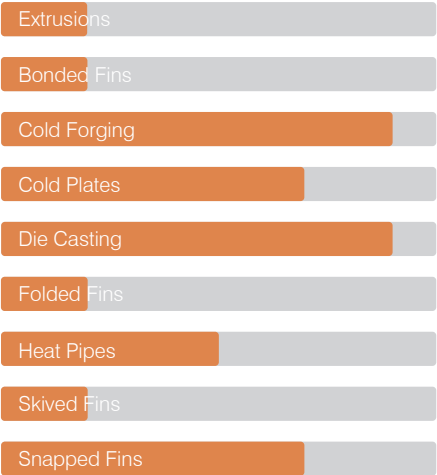

PRODUCTION COST

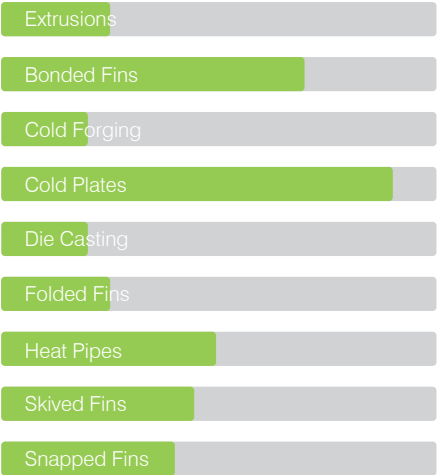



EXTRUSIONS BENEFITS


- Moderate to high surface area
- Machinable
- Available in any length
- Hundreds of standard profiles

DIE-CASTING BENEFITS

- Complex shapes
- Single manufacturing step
- Durable & rigid
- Minimal secondary processes
- Detailed surface
- High yield rate

ALUMINIUM DIE-CASTING

Die casting is the manufacturing process of injecting liquid molten metal under high pressure into a high precision mold. It is often used to mass produce complex three-dimensional structures with a detailed surface texture. This is done within a single manufacturing step without post treatment. The surface of the die is quickly cooled by the mold and the slowly cooling core creates a negative pressure within the cast metal, which in turn makes it more rigid and increases its structural integrity.

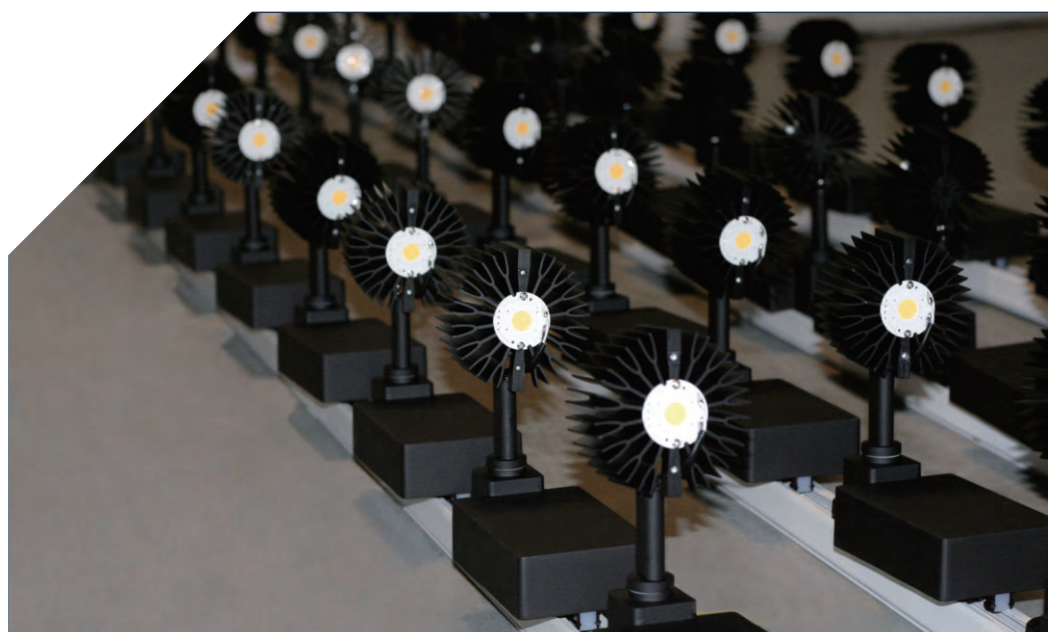

THE LANGUAGE OF LIGHTING

WATTAGE

THE LIGHT'S ENERGY CONSUMPTION



Lower wattage LED
use less electricity

CRI

THE ABILITY OF REVEAL
COLORS OF OBJECTS



A higher number more
true colors to reveal

LUMENS

MEASURE THE LIGHT'S
BRIGHTNESS



A higher number means
more output of light

CCT


A SCALE FOR
COLOR OF LIGHT



A higher number
means a cooler light.

BEAM ANGLE

A SCALE FOR
ANGLE OF LIGHT



Narrow for spotlight
wide for flood lights

UGR

A SCALE OF
COMFORTABLE OF
LIGHTING



Below 16 is good
more than 25 is bad



CITIZEN


CREE 


bridgelux®


 **NICHIA**

LUMENS


GENERAL COLOUR RENDERING INDEX (RA) AND SPECIAL CRI (RI)

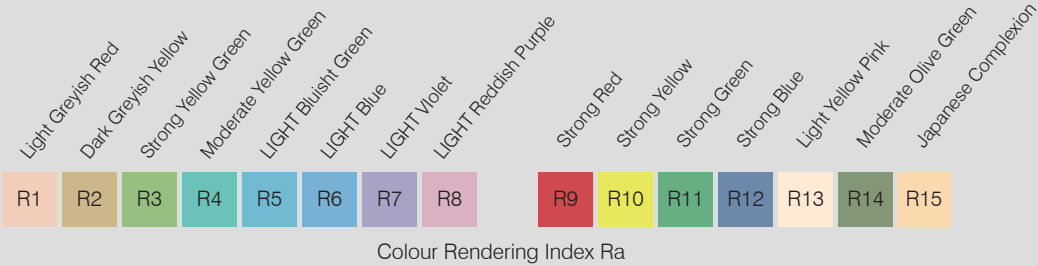

The general Colour Rendering Index looks at the first 8 colour indices (Ri). Ra is the average of the eight Ri values and is stated as CRI with a maximum value of 100. Special CRI refers to the remaining 6 colours (9 to 15) including the saturated colours and skin tones. Therefore manufacturers often aim for interior lighting LEDs to have strong R9 and R13/R15 values, as this improves the appearance of complexion giving the skin a healthy looking glow

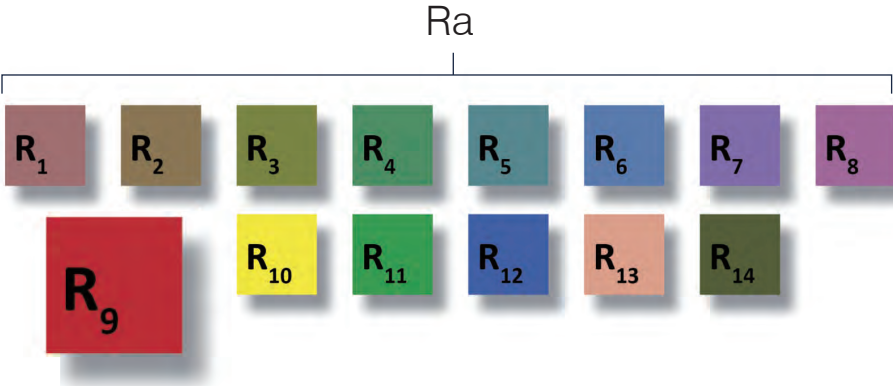

CORRELATED COLOR TEMPERATURE

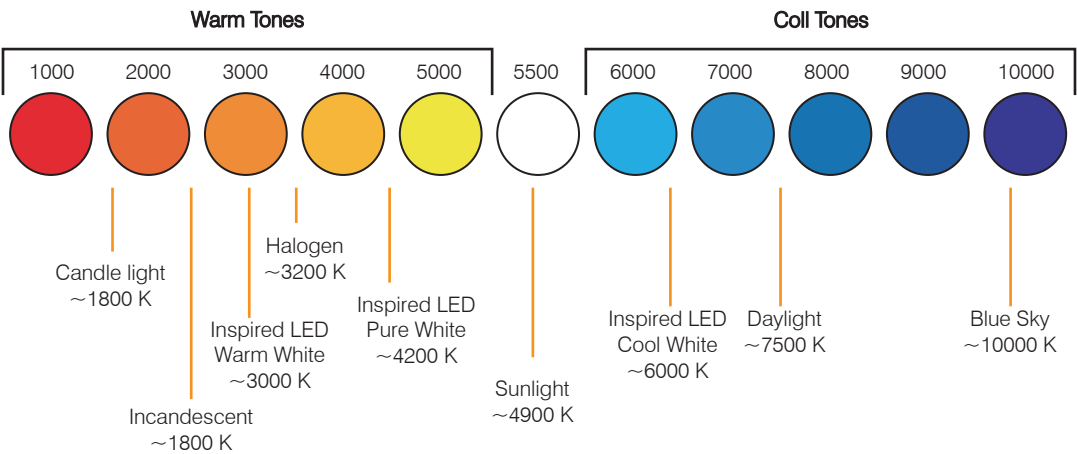

The color temperature of a light source is the temperature of an ideal black-body radiator that radiates light of comparable hue to that of the light source. Color temperature is a characteristic of visible light that has important applications in lighting, photography, videography, publishing, manufacturing, astrophysics, horticulture, and other fields. In practice, color temperature is only meaningful for light sources that do in fact correspond somewhat closely to the radiation of some black body, i.e., those on a line from reddish/orange via yellow and more or less white to blueish white wavelengths (resulting in a more blueish white) for higher temperatures.; it does not make sense to speak of the color temperature of, e.g., a green or a purple light. Color temperature is conventionally expressed in Kelvin, using the symbol K, a unit of measure for temperature based on the Kelvin scale.

Color temperatures over 5,000K are called cool colors (bluish white), while lower color temperatures (2,700–3,000 K) are called warm colors (yellowish white through red).[1] This relation, however, is a psychological one in contrast to the physical relation implied by Wien's displacement law, according to which the spectral peak is shifted towards shorter

POWER DRIVER & CONTROL SYSTEM



COMPLIANT WITH HEALTH NORMS

TRIDONIC RIPPLE FREE LED DRIVERS(<3%) ENSURE THE LOWEST LEVEL OF LIGHT FLICKERING. IN LOW AND HIGHER OUTPUT LEVELS, THE FLICKERING IS REDUCED TO A LEVEL, IMPERCEPTIBLE FOR THE HUMAN EYE. HOWEVER, SURVEYS HAVE PROVEN A RELATION BETWEEN FLICKERING AND HEALTH PROBLEMS. THEREFORE, THE APPLICATION OF LIGHTING SYSTEMS WITH A LOWER FLICKER INDEX IS AN IMPORTANT FACTOR IN BOTH COMMERCIAL AND RESIDENTIAL AREAS.

VIDEO/PHOTO PROOF

LIGHTING WITH A LOW FLICKERING INDEX IS ESSENTIAL IN AREAS WHERE PHOTO AND VIDEO CAMERAS ARE USED. FLICKERING LIGHT SOURCES HAVE A NEGATIVE EFFECT ON THE QUALITY OF PHOTOS AND VIDEO FOOTAGE.



LONGER LIFETIME

IN ADDITION TO NEGATIVE EFFECTS FOR HUMAN HEALTH, HIGH RIPPLE CURRENT WILL HARM THE LED, THE LED DRIVER AND THE EFFICIENCY OF THE SYSTEM IN GENERAL.

SURGE PROTECTION

THE TRIDONIC DRIVERS ARE PROTECTED AGAINST SURGES UP TO 4KV. THIS IS WELL ABOVE THE NORM OF 1KV. MANY LED BULBS ARE PROTECTED UP TO 500V. THE SURGE PROTECTION LEVEL OF THE TCL DRIVERS RESULTS IN AN EXTREMELY LOW DEFECT RATE OF AROUND 0.1%.

HIGHER LIGHT OUTPUT

A LED DRIVER WITH A LOWER RIPPLE FACTOR IS 5% MORE EFFICIENT IN TERMS OF LIGHT OUTPUT.



RIPPLE FREE

TRIDONIC LED DRIVERS ARE PROVIDED WITH A SOPHISTICATED MULTISTAGE CIRCUIT TO SUPPLY THE LEDS WITH A PERFECT CURRENT (A LINE). LOW QUALITY DRIVERS WITH A POOR RIPPLE FACTOR MAY CAUSE PROBLEMS INCLUDING HEADACHE, EYE STRAIN, IMPAIRED VISUAL PERFORMANCE OR, IN EXTREME CASES, EPILEPTIC SEIZURE.

SAFETY AND SECURITY

EXCESSIVE HEAT / SHORT CIRCUIT PROTECTION
PROTECTION AGAINST VOLTAGE SPIKES IN THE
ELECTRICITY NET OVERLOAD PROTECTION



PHILIPS

TRIDONIC
▼ enlightening your ideas

OSRAM







AREEK

FEATURES & BENEFITS

- SURGE PROTECTED UP TO 4KV
- VARIOUS DIMMING OPTIONS (1-10V, PUSH, DALI)
- MULTIPLE OUTPUT CURRENT OPTIONS THROUGH DIP SWITCH SETTINGS
- HEAT GENERATION AT FULL LOAD STAYS WELL BELOW THE ALLOWED MAX. 70° C (TC)
- UPCOMING VERSIONS WITH BLUETOOTH LOW ENERGY COMPATIBILITY
- ENEC/EMC COMPLIANT
- STRAIN RELIEF IN ACCORDANCE WITH EUROPEAN SAFETY STANDARDS
- ACTIVE POWER FACTOR (PF) CORRECTION
- HIGHEST QUALITY A - BRAND ELECTRONIC COMPONENTS

FAMILY LIGHTS SYSTEM



The image displays a grid of 20 product catalog pages for Citizen Lighting. Each page is dedicated to a specific lighting theme and features the following elements:

- Theme Name:** A title at the top of each page, such as "CANNON", "COUPLE", "CLOWN FISH", "NASSARIUS", "DOLPHINS", "FLOURIDER", "COUCH", "CABINET DOWNLIGHTS", "SQUARE", "EYEBALL", "JELLYFISH", "FISH EYES", "MINI - PIPE", "OWL", "CLAMP", "CHARGE MODULE", "MINI TRACK LIGHTING", "SARDINE", and "SEA HORSE".
- Product Images:** Multiple photographs of the lighting fixtures, showing different models and configurations within the theme.
- Specifications:** Technical details for each model, including power ratings (e.g., 10W, 15W, 20W, 30W, 40W, 50W, 60W, 70W, 80W, 90W, 100W, 120W, 150W, 180W, 200W, 250W, 300W, 350W, 400W, 450W, 500W, 600W, 700W, 800W, 900W, 1000W, 1200W, 1500W, 1800W, 2000W, 2500W, 3000W, 3500W, 4000W, 4500W, 5000W, 6000W, 7000W, 8000W, 9000W, 10000W), beam angles (e.g., 15°, 25°, 35°, 45°, 55°, 65°, 75°, 85°, 95°, 105°, 115°, 125°, 135°, 145°, 155°, 165°, 175°, 185°, 195°, 205°, 215°, 225°, 235°, 245°, 255°, 265°, 275°, 285°, 295°, 305°, 315°, 325°, 335°, 345°, 355°, 365°, 375°, 385°, 395°, 405°, 415°, 425°, 435°, 445°, 455°, 465°, 475°, 485°, 495°, 505°, 515°, 525°, 535°, 545°, 555°, 565°, 575°, 585°, 595°, 605°, 615°, 625°, 635°, 645°, 655°, 665°, 675°, 685°, 695°, 705°, 715°, 725°, 735°, 745°, 755°, 765°, 775°, 785°, 795°, 805°, 815°, 825°, 835°, 845°, 855°, 865°, 875°, 885°, 895°, 905°, 915°, 925°, 935°, 945°, 955°, 965°, 975°, 985°, 995°, 1005°, 1015°, 1025°, 1035°, 1045°, 1055°, 1065°, 1075°, 1085°, 1095°, 1105°, 1115°, 1125°, 1135°, 1145°, 1155°, 1165°, 1175°, 1185°, 1195°, 1205°, 1215°, 1225°, 1235°, 1245°, 1255°, 1265°, 1275°, 1285°, 1295°, 1305°, 1315°, 1325°, 1335°, 1345°, 1355°, 1365°, 1375°, 1385°, 1395°, 1405°, 1415°, 1425°, 1435°, 1445°, 1455°, 1465°, 1475°, 1485°, 1495°, 1505°, 1515°, 1525°, 1535°, 1545°, 1555°, 1565°, 1575°, 1585°, 1595°, 1605°, 1615°, 1625°, 1635°, 1645°, 1655°, 1665°, 1675°, 1685°, 1695°, 1705°, 1715°, 1725°, 1735°, 1745°, 1755°, 1765°, 1775°, 1785°, 1795°, 1805°, 1815°, 1825°, 1835°, 1845°, 1855°, 1865°, 1875°, 1885°, 1895°, 1905°, 1915°, 1925°, 1935°, 1945°, 1955°, 1965°, 1975°, 1985°, 1995°, 2005°, 2015°, 2025°, 2035°, 2045°, 2055°, 2065°, 2075°, 2085°, 2095°, 2105°, 2115°, 2125°, 2135°, 2145°, 2155°, 2165°, 2175°, 2185°, 2195°, 2205°, 2215°, 2225°, 2235°, 2245°, 2255°, 2265°, 2275°, 2285°, 2295°, 2305°, 2315°, 2325°, 2335°, 2345°, 2355°, 2365°, 2375°, 2385°, 2395°, 2405°, 2415°, 2425°, 2435°, 2445°, 2455°, 2465°, 2475°, 2485°, 2495°, 2505°, 2515°, 2525°, 2535°, 2545°, 2555°, 2565°, 2575°, 2585°, 2595°, 2605°, 2615°, 2625°, 2635°, 2645°, 2655°, 2665°, 2675°, 2685°, 2695°, 2705°, 2715°, 2725°, 2735°, 2745°, 2755°, 2765°, 2775°, 2785°, 2795°, 2805°, 2815°, 2825°, 2835°, 2845°, 2855°, 2865°, 2875°, 2885°, 2895°, 2905°, 2915°, 2925°, 2935°, 2945°, 2955°, 2965°, 2975°, 2985°, 2995°, 3005°, 3015°, 3025°, 3035°, 3045°, 3055°, 3065°, 3075°, 3085°, 3095°, 3105°, 3115°, 3125°, 3135°, 3145°, 3155°, 3165°, 3175°, 3185°, 3195°, 3205°, 3215°, 3225°, 3235°, 3245°, 3255°, 3265°, 3275°, 3285°, 3295°, 3305°, 3315°, 3325°, 3335°, 3345°, 3355°, 3365°, 3375°, 3385°, 3395°, 3405°, 3415°, 3425°, 3435°, 3445°, 3455°, 3465°, 3475°, 3485°, 3495°, 3505°, 3515°, 3525°, 3535°, 3545°, 3555°, 3565°, 3575°, 3585°, 3595°, 3605°, 3615°, 3625°, 3635°, 3645°, 3655°, 3665°, 3675°, 3685°, 3695°, 3705°, 3715°, 3725°, 3735°, 3745°, 3755°, 3765°, 3775°, 3785°, 3795°, 3805°, 3815°, 3825°, 3835°, 3845°, 3855°, 3865°, 3875°, 3885°, 3895°, 3905°, 3915°, 3925°, 3935°, 3945°, 3955°, 3965°, 3975°, 3985°, 3995°, 4005°, 4015°, 4025°, 4035°, 4045°, 4055°, 4065°, 4075°, 4085°, 4095°, 4105°, 4115°, 4125°, 4135°, 4145°, 4155°, 4165°, 4175°, 4185°, 4195°, 4205°, 4215°, 4225°, 4235°, 4245°, 4255°, 4265°, 4275°, 4285°, 4295°, 4305°, 4315°, 4325°, 4335°, 4345°, 4355°, 4365°, 4375°, 4385°, 4395°, 4405°, 4415°, 4425°, 4435°, 4445°, 4455°, 4465°, 4475°, 4485°, 4495°, 4505°, 4515°, 4525°, 4535°, 4545°, 4555°, 4565°, 4575°, 4585°, 4595°, 4605°, 4615°, 4625°, 4635°, 4645°, 4655°, 4665°, 4675°, 4685°, 4695°, 4705°, 4715°, 4725°, 4735°, 4745°, 4755°, 4765°, 4775°, 4785°, 4795°, 4805°, 4815°, 4825°, 4835°, 4845°, 4855°, 4865°, 4875°, 4885°, 4895°, 4905°, 4915°, 4925°, 4935°, 4945°, 4955°, 4965°, 4975°, 4985°, 4995°, 5005°, 5015°, 5025°, 5035°, 5045°, 5055°, 5065°, 5075°, 5085°, 5095°, 5105°, 5115°, 5125°, 5135°, 5145°, 5155°, 5165°, 5175°, 5185°, 5195°, 5205°, 5215°, 5225°, 5235°, 5245°, 5255°, 5265°, 5275°, 5285°, 5295°, 5305°, 5315°, 5325°, 5335°, 5345°, 5355°, 5365°, 5375°, 5385°, 5395°, 5405°, 5415°, 5425°, 5435°, 5445°, 5455°, 5465°, 5475°, 5485°, 5495°, 5505°, 5515°, 5525°, 5535°, 5545°, 5555°, 5565°, 5575°, 5585°, 5595°, 5605°, 5615°, 5625°, 5635°, 5645°, 5655°, 5665°, 5675°, 5685°, 5695°, 5705°, 5715°, 5725°, 5735°, 5745°, 5755°, 5765°, 5775°, 5785°, 5795°, 5805°, 5815°, 5825°, 5835°, 5845°, 5855°, 5865°, 5875°, 5885°, 5895°, 5905°, 5915°, 5925°, 5935°, 5945°, 5955°, 5965°, 5975°, 5985°, 5995°, 60

SEA HORSE

322mm



MHT8584B-L20 40W

P B04

472mm



MHT8584B-L30 40W

P B04

MHT8584A 30W

P B02

AC



MHT8584H 40W

P B03

AC



CITIZEN

672mm

MHT8584B-L40 40W

P_{B04}



MHT8584 30W

P_{B01}



DOB(AC) FEATURES

RUNS DIRECTLY ON AC CURRENT


EXCELLENT PF (>0.99) AND LOW THD ($<20\%$)

THERMAL SHUT DOWN CIRCUIT EMBEDDED (150°C)

COMPATIBLE WITH MOST TRIAC DIMMERS ON THE MARKET

GREAT COMBINATION OF CHIP-ON-BOARD AND AC TECHNOLOGY

PROVIDES NO STROBING, NO FLICKER AS FOUND IN MOST LED AC MODULARS



PIPE

CITIZEN



MHT8595 20W
P B20



MHT8594 20W
P B19



MHT8596A 20W
P B21
AC



MHT8596B 30W
P B22
AC



MHT8597 40W
P B23
AC

MODERN LED TRACK LIGHTING WITH A BOLD, CLEAN LOOK. OUR LED SPOTLIGHT TRACK BRINGS A HIGH-CALIBER DIRECTIONAL LIGHTING SYSTEM TO YOUR INTERIOR WITH ADVANCED LED TECHNOLOGY FOR COST-EFFICIENCY AND ENERGY SAVING VALUE. WE HAVE DRIVER AND WITHOUT DRIVER AC VERSIONS.

SEALS



MHT8585A 40W

P B06



MHT8585 40W

P B05



MHT8586 60W

P B07

CITIZEN


COMBINES CLASSIC CYLINDRICAL SHAPE DESIGN WITH EFFECTIVE HEAT MANAGEMENT
INTEGRATED DESIGN WITHOUT LED DRIVER. KETAI TRACK LIGHT IS A PERFECT CHOICE
FOR SHOP LIGHTING SOLUTIONS, THREE SIZES DELIVER 2000LM TO 5600LM, FROM 20W
TO 60W ROTATE THROUGH 359 AND PIVOT THROUGH 90°

MINI TRACK LIGHTING



KTK1-8587 7.5W

P_{B13}



HC-8587 7.5W

P_{B13}




HKTA-8587 7.5W

P_{B13}



KTK1-8591 7.5W

P_{B14}



HC-8591 7.5W

P_{B14}



HKTA-8591 7.5W

P_{B14}



KTK1-8592 7.5W


P B15



HKTA-8592 7.5W

P B15

bridgelux®




HC-8592 7.5W

P B15

5 YEARS GUARANTEE

SMALL LED TRACK LIGHTS. THIS KIND OF UNIQUE DESIGN IS SPECIAL FOR HOME OR SHOPPING MALL. EACH OF THE STYLES WE OFFER HAS THREE INSTALLATION WAYS: 2 TRACKING WAYS OR FLUSH SURFACE MOUNTED DIE CAST ALUMINUM CONSTRUCTION. NON-DIM IS STANDARD, DIM IS OPTIONAL.


NAUTILUS



MHT8573 50W

P B08

bridgelux®

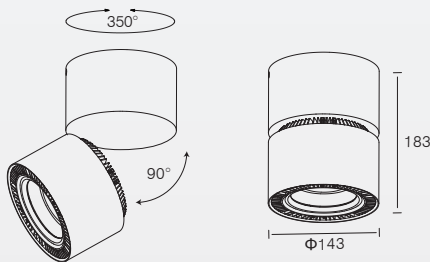

XD2054 50W

P C12

PERFECTLY COMBINES DESIGN AND FUNCTION. OPTIMIZED PASSIVE COOLING SYSTEM ENSURES LOW TEMPERATURE AND LONG LIFETIME OF LED. FRONT RING PROVIDES GOOD GLARE CONTROL, WHITE BLACK IS STANDARD. ALL BLACK OR WHITE IS OPTIONAL. A COMBINATION OF PERFECTLY DEVELOPED LENS AND REFLECTOR PROVIDE HIGH PRECISION LIGHT DISTRIBUTION. FOR THE TRACK LIGHTS ADAPTER: 3-PHASE IS STANDARD, 1-PHASE ADAPTER IS AVAILABLE UPON REQUEST.

DRUM

THE COMMERCIAL-GRADE LED RECESSED DOWNLIGHT SURFACE MOUNTED DOWNLIGHTS, TRACK LIGHTING SYSTEM ARE IDEAL FOR RETROFITTING INEFFICIENT FIXTURES IN MALLS, HOSPITALS, AIRPORTS OFFICES, LOBBIES AND OTHER COMMERCIAL APPLICATIONS, ALSO THEY ARE IDEAL REPLACEMENTS FOR EXISTING, LESS EFFICIENT INCANDESCENT AND COMPACT FLUORESCENT (CFL) LIGHT SOURCES COMMONLY USED IN THE COMMERCIAL CENTERS.



MHT8575 47W

P B16



KT6667 43W


P A55  Ø185mm



KT6673 43W

P A56  Ø206mm

CITIZEN



KT6679-2 43W

P A54  420x225mm



KT6679-1 43W

P A54  225x225mm

SNAIL



MHT8558 26W

P_{B10}

MHT8554 26W

P_{B09}



MHT8572 26W

P_{B11}

bridgelux®

5 YEARS GUARANTEE


HIGH POWER COMMERCIAL LED LIGHTING SERIES. ANTI-GLARE FRONT RING DESIGN CAN OFFER MORE COMFORTABLE LIGHTING ENVIRONMENT FOR YOUR CLIENTS. THERMO - OPTIMAL DESIGN ENSURES LONG LIFETIME LIFE. UNIQUE ORIGINAL DESIGN OFFERS TECHNO-MARKETING BENEFITS.

26W SYSTEM POWER

CRI>80 OR 90 ON PROJECT REQUEST

BEAM ANGLE: 18° OR 30°

SNAIL

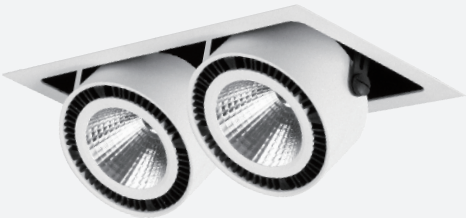

KT6567-2 2X26W

PA28  170x320mm




KT6567-1 26W

PA28  170x170mm



KT6566 26W

PA74  Ø110mm



XD2022A 26W

PC03



XD2022-L50 26W

PC04

CHANGE MODULE



KT6585-2 2x25W

P A37


310x168mm



KT6583-2 2x25W

P A35

280x130mm



CITIZEN



KT6584-2 2x25W

P A36

280x130mm

FEATURES

- UNIQUE ORIGINAL DESIGN OFFERS KETAI-MARKETING BENEFITS.
- QUALITY DIE-CAST CONSTRUCTION.
- AC VERSION IS AVAILABLE ON YOUR PROJECT REQUIREMENT.
- MORE THAN 6 STYLES OF FRAME TRIMS FOR YOUR DIY.
- FOR THE LED MODULAR, WE OFFER WIDE RANGE OF BEAM ANGLES AND CCTS, MEETING YOUR DIFFERENT APPLICATION.
- THERMO-OPTIMAL DESIGN ENSURES LONG LIFETIME.
- OUR 25 WATTS LED DOWNLIGHTS CAN PROVIDE MORE THAN 2600LM BRIGHT LIGHT.

THIS LED MODULAR DESIGN HELPS CUSTOMER TO REDUCE STOCK.



KT6583-1 25W

P A35

Ø130mm



KT6584-1 25W

P A36

Ø130mm




KT6585-1 25W

P A37


168X155mm

CANNON




KT6309 16W

PA31  Ø125mm



KT6327 16W

PA32  Ø95mm



KT6574 16W

PA33  Ø100mm

bridgelux®



KT6580 16W

PA34  Ø78mm



KT6344-1 16W

PA40  Ø150X150mm



KT6344-2 2x16W

PA40  Ø275X150mm


MAX SYSTEM POWER 16W OUTPUT 1200 LM

A COMPLETE FAMILY OF DOWNLIGHTS FEATURING FIXED ROUND OR SQUARE, GIMBALED ROUND DESIGNS AVAILABLE IN WHITE, GREY, BLACK POWDER COATING AND CUSTOM FINISHES. THEY BOAST HIGHER EFFICIENCY, VIRTUALLY DO NOT REQUIRE ANY MAINTENANCE AND ULTIMATELY HAVE A LOWER COST THAN STANDARD HALOGEN LIGHTS.

TURBINE

KT6550 7.5W

P A13  Ø70mm




bridgelux®



KT6551 7.5W

P A14  Ø70mm



5 YEARS GUARANTEE

MAIN MATERIAL: ALUMINIUM

SURFACE FINISH: WHITE, GREY , BLACK

THERMALLY ENGINEERED HEATSINK IS ROBUST AND OFFERS COOLER OPERATION

HIGH GRADE DIFFUSER PROVIDES UNIFORM LIGHT AS WELL AS GREATLY ILLUMINATES ENVIRONMENT.

ANIT-GLARE REFLECTOR CREATES VISUAL COMFORT

EASY TO INSTALL WITH TWO SPRING CLIPS

EASY TO REPLACE MR16 OR GU10 HALOGEN SMALL SPOTLIGHTS.

BEAM ANGLE: 30°/60°

NON-DIM IS STANDARD, DIM IS OPTIONAL.

SMALL EYE

THERMALLY ENGINEERED HEATSINK IS ROBUST AND OFFERS COOLER OPERATION
HIGH GRADE DIFFUSER PROVIDES UNIFORM LIGHT AS WELL AS GREATLY ILLUMINATES ENVIRONMENT.


ANIT-GLARE REFLECTOR CREATES VISUAL COMFORT

EASY TO INSTALL WITH TWO SPRING CLIPS



EASY TO REPLACE MR16 OR GU10 HALOGEN SMALL SPOTLIGHTS.



KT6818 7.5W



KT6817 7.5W



TWINS



KT6821 11W

P A19  Ø81x81mm

KT6822 11W

P A20  Ø81mm

THERMALLY ENGINEERED HEATSINK IS ROBUST AND OFFERS COOLER OPERATION
HIGH GRADE DIFFUSER PROVIDES UNIFORM LIGHT AS WELL AS GREATLY ILLUMINATES ENVIRONMENT.
ANIT - GLARE REFLECTOR CREATES VISUAL COMFORT
EASY TO INSTALL WITH TWO SPRING CLIPS
EASY TO REPLACE MR16 OR GU10 HALOGEN SMALL SPOTLIGHTS.



KT6564 7.5W

P A23  78x78mm

KT6565 7.5W

P A24  Ø78mm



KT6564A 7.5W

P A21  78x78mm

KT6565A 7.5W

P A22  Ø78mm

COUPLE




KT6613 7.5W

P A45  Ø76mm



KT6614 7.5W

P A46  Ø102mm



KT6598 7.5W

P A47  Ø60mm



KT6599 7.5W

P A48  Ø69mm

bridgelux®

5 YEARS GUARANTEE

SURFACE FINISH: WHITE, GREY, BLACK

THERMALLY ENGINEERED HEATSINK IS ROBUST AND OFFERS COOLER OPERATION
HIGH GRADE DIFFUSER PROVIDES UNIFORM LIGHT AS WELL AS GREATLY ILLUMINATES ENVIRONMENT.

ANIT-GLARE REFLECTOR CREATES VISUAL COMFORT

EASY TO INSTALL WITH TWO SPRING CLIPS

EASY TO REPLACE MR16 OR GU10 HALOGEN SMALL SPOTLIGHTS.

NON-DIM IS STANDARD, DIM IS OPTIONAL.

CLOWN FISH



KT6814-2 2x7.5W

P A12  80x170mm



KT6814-1 7.5W

P A12  Ø80mm

bridgelux®



IP44

KT6595 7.5W

P A11  Ø80mm



KT6560-2 2x7.5W

P A15  200x100mm



KT6560-1 7.5W

P A15  Ø100mm

5 YEARS GUARANTEE

SURFACE FINISH: WHITE, GREY, BLACK

THERMALLY ENGINEERED HEATSINK IS ROBUST AND OFFERS COOLER OPERATION

HIGH GRADE DIFFUSER PROVIDES UNIFORM LIGHT AS WELL AS GREATLY ILLUMINATES ENVIRONMENT.

ANIT-GLARE REFLECTOR CREATES VISUAL COMFORT

EASY TO INSTALL WITH TWO SPRING CLIPS


EASY TO REPLACE MR16 OR GU10 HALOGEN SMALL SPOTLIGHTS.

NON-DIM IS STANDARD, DIM IS OPTIONAL.


NASSARIUS



KT6554 7.5W



bridgelux®



KT6662 7.5W



5 YEARS GUARANTEE

THERMALLY ENGINEERED HEATSINK IS ROBUST AND OFFERS COOLER OPERATION
HIGH GRADE DIFFUSER PROVIDES UNIFORM LIGHT AS WELL AS GREATLY ILLUMINATES
ENVIRONMENT.

ANIT-GLARE REFLECTOR CREATES VISUAL COMFORT


EASY TO INSTALL WITH TWO SPRING CLIPS

EASY TO REPLACE MR16 OR GU10 HALOGEN SMALL SPOTLIGHTS.

BEAM ANGLE: 30°/60°

NON-DIM IS STANDARD, DIM IS OPTIONAL.

SARDINE

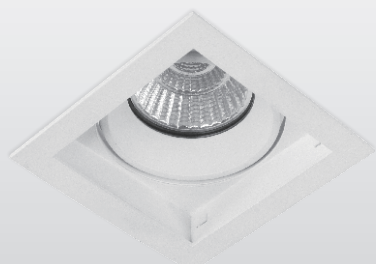

KT6648-1 7.5W

PA06  88x88mm



KT6648-2 2x7.5W

PA06  188x88mm



KT6659-2 2x7.5W

PA05  200x100mm



KT6659-1 7.5W

PA05  Ø100mm



KT6636 7.5W

PA08  Ø90mm


SARDINE




RECESSED



KT6647-1 7.5W



KT6647-2 2x7.5W





SURFACE MOUNTED



XD2036-1 7.5W



XD2036-2 2x7.5W



5 YEARS GURANTEE

THERMALLY ENGINEERED HEATSINK IS ROBUST AND OFFERS COOLER OPERATION
HIGH GRADE DIFFUSER PROVIDES UNIFORM LIGHT AS WELL AS GREATLY ILLUMINATES ENVIRONMENT.

ANIT-GLARE REFLECTOR CREATES VISUAL COMFORT

EASY TO INSTALL WITH TWO SPRING CLIPS

EASY TO REPLACEMENT OF MR16 OR GU10 HALOGEN SMALL SPOTLIGHTS.

NON-DIM IS STANDARD, DIM IS OPTIONAL.

RETROFIT DOWNLIGHTS



KT6596A 7.5W




KT6594A 7.5W



P65 8W WATERPROOF LED DOWN LIGHTS USE IN WET ROOMS, SHOWERS, AND BATHROOMS. THEY ARE ADJUSTABLE RECESSED LED DOWNLIGHT WITH SYMMETRICAL LIGHT DISTRIBUTION ON A MEDIUM BEAM AND WITH HIGH DEGREE PROTECTION. KETAI ENHANCES EVERY THE AETHETICS OF DETAILS OR ARCHITECTURAL ELEMENTS.



KT6594 7.5W



KT6596 7.5W



FLOUNDER




KT16-1 8W



P A60  Ø75mm



KT16-2 2x8W




P A60  2xØ75mm





KT16-3 3x8W

P A60  3xØ75mm



NEW CEILING LIGHT FIXTURES ARE A WONDERFUL WAY TO ADD FRESH STYLE TO YOUR HOME. THEY COME IN MANY DIFFERENT SHAPES AND SIZES. YOU WILL FIND A BEAUTIFUL, ENERGY-EFFICIENT CHOICES FOR REPLACING AN EXISTING CEILING LIGHT, AVAILABLE IN A WIDE VARIETY OF STYLES AND FINISHES, THESE EXQUISITE FLUSH MOUNTED DESIGNS ARE IDEAL FOR DRESSING UP ANY SPACE AT YOUR HOME!

CONCH



MINI LED DOWNLIGHTS ACCENTUATE THE FINISH AND MITERING DETAILS OF THESE CABINET FACES.

KETAI MINI LED RECESSED DOWNLIGHTS AND GIMBALS ARE THE PERFECT SOLUTION FOR A TASK OR LIGHTING ACCENIN CONFINED SPACES. AS LITTLE AS 6.4CM IN DIAMETER, THESE TINY, SECOND GENERATION LED FIXTURES TRULY FIT IN THE PALM OF YOUR HAND.



FT210 3W

PA49  Ø60mm




FT211 3W

PA50  60X60mm




FT210C 3W

PA49



FT211C 3W

PA50



SQUARE

bridgelux



KT6808A 12W

PA51  90x90mm

CITIZEN



KT6808B 16W


PA52  90x90mm

MHT8557 16W

PB18



CITIZEN



KT6355A 20W

PA41  150x150mm

CREE ⇄



KT6355 12W

PA42  154x154mm


CITIZEN

SQUARE-SHAPED RECESSED AND SURFACE MOUNTED LED DOWNLIGHTS. THERMALLY ENGINEERED HEATSINK IS ROBUST AND OFFERS COOLER OPERATION
ADJUSTABLE UP TO 85 DEGREES.
DIE CAST ALUMINUM CONSTRUCTION.
NON-DIM IS STANDARD, DIM IS OPTIONAL. 5 YEARS GUARANTEE

CITIZEN

KT6808C 16W

PA53  90x90mm

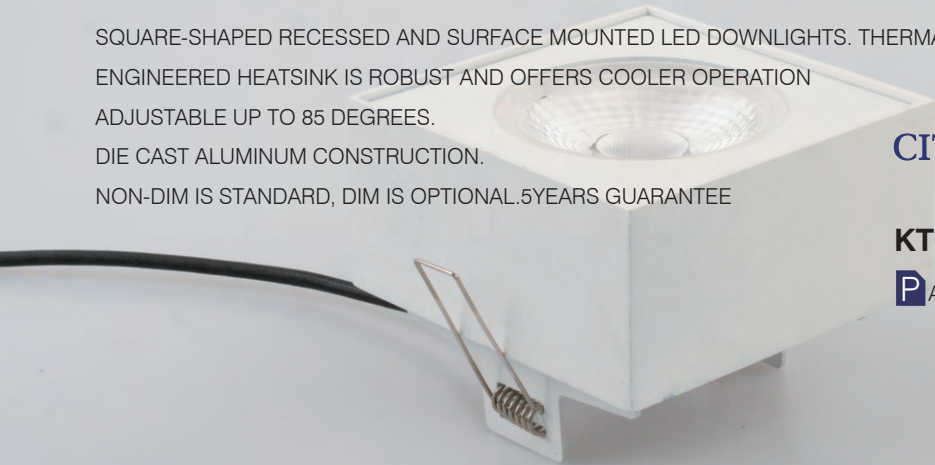

EYEBALL



KT6816-1 8W 

 A62  Ø100mm



KT6815 8W 

 A61  Ø100mm



KT6816-2 2x8W 

 A62  200x100mm



THESE EYEBALL STYLE LED LIGHTS
PERFECTLY COMBINE DESIGN AND FUNCTION.

THEY OFFER THREE INSTALLATION WAYS:

TRACKING OR LUSH SURFACE MOUNTED AND RECESSED DIE
CAST ALUMINIUM CONSTRUCTION.

NON-DIM IS STANDARD, DIM IS OPTIONAL. 5 YEARS GUARANTEE

MHT8588 8W

 B12 

PLATE



KT6902	15W	3"	P A72
KT6903	30W	4"	
KT6904	40W	5"	



KT6899	15W	3"	P A71
KT6900	30W	4"	
KT6901	40W	5"	



KT6905	30W	4"	P A73
KT6906	40W	5"	

KETAI QUALIFIED AND SIMPLE DESIGNED ARCHITECTURAL DOWNLIGHT FIXTURES ARE OFFERED IN 2.5, 3, 4, 5, 6 AND 8' APERTURE SIZES, ALONG WITH DIFFERENT WATTAGES AND LUMINOUS OUTPUT WORK WITH A WIDE VARIETY OF CEILING SYSTEMS. WE PROVIDE A COMPREHENSIVE SELECTION OF COMMERCIAL, RESIDENTIAL AND LIGHT COMMERCIAL DOWNLIGHTS FOR 18 YEARS.

CLAMP

NICHIA

CITIZEN

bridgelux®

KT6655 45W

P A44 Ø185mm



KT6654 22W

P A44 Ø145mm



KT6653 15W

P A44 Ø120mm



KT6664 7W

P A44 Ø100mm



KT6634 40W

P A43 Ø185mm



KT6633 27W

P A43 Ø145mm



KT6632 18W

P A43 Ø120mm



KT6631 11W

P A43 Ø100mm



KETAI QUALIFIED AND SIMPLE DESIGNED

ARCHITECTURAL DOWNLIGHT FIXTURES ARE

OFFERED IN 4", 5", 5.5" AND 7" APERTURE SIZES

ALONG WITH DIFFERENT WATTAGES AND LUMINOUS


OUTPUT WORK WITH A WIDE VARIETY OF CEILING SYSTEMS

UFO




KT6347B 20W

P A39  Ø170mm



bridgelux[®]

 **NICHIA**



KT6347 11W


P A38  Ø170mm

HONEYCOMB MESH BACK OVER DESIGN FOR EXCELLENT HEAT RELEASE

ALUMINIUM DIE-CASTING MATERIAL


CORRELATED COLOR TEMPERATURE 3000K STANDARD, 4000K OPTIONAL

MULTIPLE LIGHTS MODULAR



KT6925 3W

PA65-66  45X44mm



KT6926 6W

PA65-66  45X74mm



KT6927 8W

PA65-66  45X104mm



KT6928 11W

PA65-66  45X134mm



KT6929 13W

PA65-66  45X164mm



KT6930 16W


PA65-66  45X174mm

SQUARE PANEL



KF1014 35W

P D05

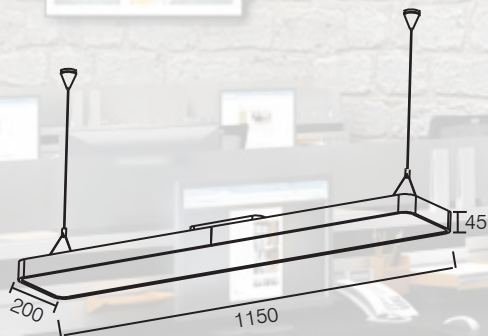


CEILING LIGHT



XD2017 24W

P C09






COMBINATION OF DESIGN AND FUNCTION

KETAI LED PANEL LIGHT

IT IS UNMISTAKABLY PART OF THE FAMILY FROM THE VERY FIRST GLANCE. THIS PANEL LIGHT PERFECTLY COMPLEMENTS THE FLOOR LIGHTS IN THE SERIES AND PROMISES A HARMONIOUS OVERALL DESIGN FOR LIGHTING PLANNING IN ALL OFFICES. THIS PANEL LIGHT IS JUST AS TIME - LESSLY SLEEK AND ELEGANT IN APPEARANCE, FEATURING HIGH - QUALITY MATERIALS AND EXCELLENT LIGHT QUALITY. EVERY DETAIL IS DESIGNED TO IMPRESS: TO PRESERVE THE CLEAN-CUT, AESTHETIC DESIGN, THE CABLE ROUTING IS INVISIBLY HIDDEN IN THE SUSPENSION.

SURFACE MOUNTED

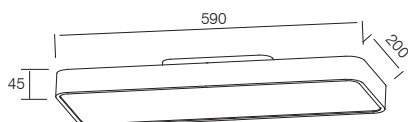

XD2018 18W

P C10

PANEL AND DOWN LIGHTS



KF1015 40W

P D01

Φ360



KF1015A 20W

P D02

Φ360

A BIG SIZE SINGLE PENDANT CAN ADD A MORE UNIQUE ASPECT TO YOUR PERSONAL SPACES. YOUR CHOICE OF LIGHTING HAS THE POWER TO CREATE TONES OF SOPHISTICATION AND ELEGANT COOL PROFESSIONALISM, WARMTH OR TRENDY STYLE DEPENDING ON YOUR PERSONAL DESIGN VISION. WE SPECIALIZE IN SUPPLYING QUALITY PIECES THAT HIGHLIGHT ITS NATURAL DECOR AND CREATE ROOMS THAT ARE VISUALLY IMPRESSIVE AND MAKE YOUR CLIENTS FEEL RELAXED AND HAPPY.

JELLYFISH

KF1031 $\Phi 368$ **25W**


KF1030 $\Phi 417$ **30W**

P_{D10} **AC**



Golden Red Black

SUSPENDED FROM THE CENTER OF THE ROOM, FLUSH MOUNT LIGHTING FIXTURES ARE IDEAL FOR PROVIDING GENERAL OVERALL ILLUMINATION. FLUSH MOUNT OR SUSPENDED FIXTURES ARE PERFECT TO USE IN BEDROOMS,BATH AREAS AND KITCHEN SPACES.THESE FIXTURES ARE EASY TO INSTALL AND PROVIDE A FRESH DECORATIVE TOUCH FOR HOME DIY RENOVATION PROJECTS.

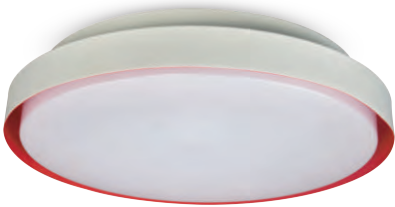

XD2097 $\Phi 368$ **25W**

XD2096 $\Phi 417$ **30W**

P_{C20} **AC**



FISH EYES



Ø222mm

XD2080 16W

PC15



Ø182mm

XD2079 11W

PC15



Ø222mm

SL2080 16W

PD09




Ø124mm

XD2078 8W

PC15

SUSPENDED FROM THE CENTER OF A ROOM, FLUSH MOUNT LIGHTING FIXTURES ARE IDEAL FOR PROVIDING GENERAL, OVERALL ILLUMINATION. THESE FIXTURES ARE PERFECT FOR USE IN BEDROOMS, BATH AREAS AND KITCHEN SPACES. THEY FIXTURES ARE EASY TO INSTALL AND PROVIDE A FRESH DECORATIVE TOUCH FOR HOME DIY RENOVATION PROJECTS.

DOLPHINS

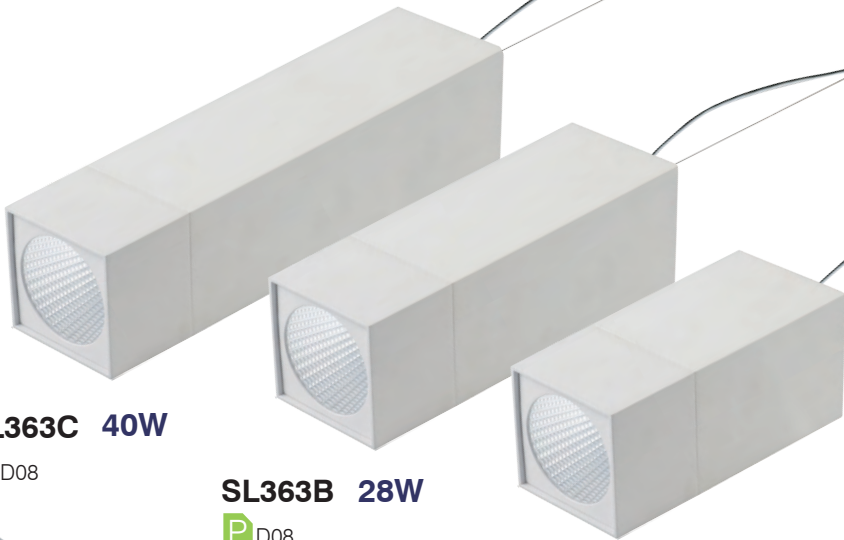

SL363C 40W


P_{D08}

SL363B 28W

P_{D08}

SL363A 20W

P_{D08}

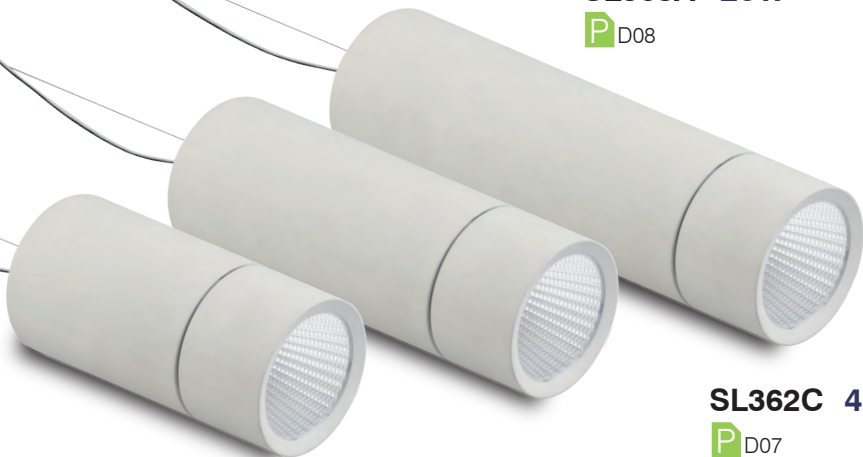

SL362C 40W

P_{D07}

SL362B 28W

P_{D07}

SL362A 20W

P_{D07}

CITIZEN

PENDANTS

EVERY ROOM NEEDS LIGHT IN ORDER TO BE TRULY COMPLETE. KETAI PROVIDES FAR MORE THAN A SIMPLE FUNCTIONALITY FOR A HOTEL IN THE EVENING; IT CREATES THE ESSENCE OF A SPACE'S AMBIENCE AND ENHANCES IT, MAKING EACH ROOM COME ALIVE. OUR PENDANTS FEATURE DIVERSE SHAPES THAT COMBINE WELL WITH A ROOM'S PERSONALITY, FROM PIPE ROUND TO SQUARE. MANY ARE AVAILABLE IN THE GROUPS OF THREE OR MORE HEIGHTS, MEANING THAT CREATING CLUSTERS OF DESCENDING PENDANTS IS EASY.

MOBULA



PENDANT LIGHT

KF1019 20W Φ 355
KF1020 30W Φ 500
KF1021 50W Φ 750
KF1022 100W Φ 1000

P D06

A BIG SIZE SINGLE PENDANT CAN ADD A MORE UNIQUE ASPECT TO YOUR PERSONAL SPACES. YOUR CHOICE OF LIGHTING HAS THE POWER TO CREATE TONES OF SOPHISTICATION AND ELEGANCE COOL PROFESSIONALISM, WARMTH OR TRENDY STYLE DEPENDING ON YOUR PERSONAL DESIGN VISION. WE SPECIALIZE IN SUPPLYING QUALITY PIECES THAT HIGHLIGHT ITS NATURAL DECOR AND CREATE ROOMS THAT ARE VISUALLY IMPRESSIVE AND MAKE YOUR CLIENTS FEEL RELAXED AND HAPPY.



XD2059 22W Φ 405
XD2060 34W Φ 505
XD2061 40W Φ 605

P C13

CEILING LIGHT

CUTTLEFISH



KT6578 7.5W

PA18  Ø78mm



KT6577 7.5W

PA17  Ø78mm

bridgelux®



XD2019 7.5W


PC07



150mm


XD2020 7.5W

PC08

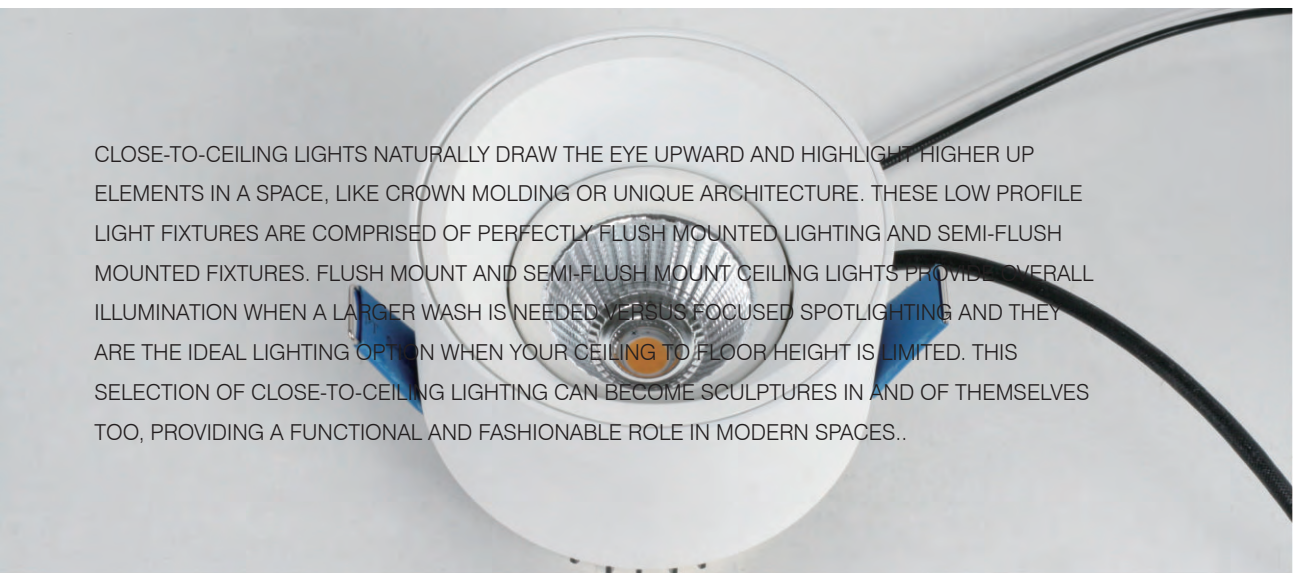

CLOSE-TO-CEILING LIGHTS NATURALLY DRAW THE EYE UPWARD AND HIGHLIGHT HIGHER UP ELEMENTS IN A SPACE, LIKE CROWN MOLDING OR UNIQUE ARCHITECTURE. THESE LOW PROFILE LIGHT FIXTURES ARE COMPRISED OF PERFECTLY FLUSH MOUNTED LIGHTING AND SEMI-FLUSH MOUNTED FIXTURES. FLUSH MOUNT AND SEMI-FLUSH MOUNT CEILING LIGHTS PROVIDE OVERALL ILLUMINATION WHEN A LARGER WASH IS NEEDED VERSUS FOCUSED SPOTLIGHTING AND THEY ARE THE IDEAL LIGHTING OPTION WHEN YOUR CEILING TO FLOOR HEIGHT IS LIMITED. THIS SELECTION OF CLOSE-TO-CEILING LIGHTING CAN BECOME SCULPTURES IN AND OF THEMSELVES TOO, PROVIDING A FUNCTIONAL AND FASHIONABLE ROLE IN MODERN SPACES..

BALLOONFISH

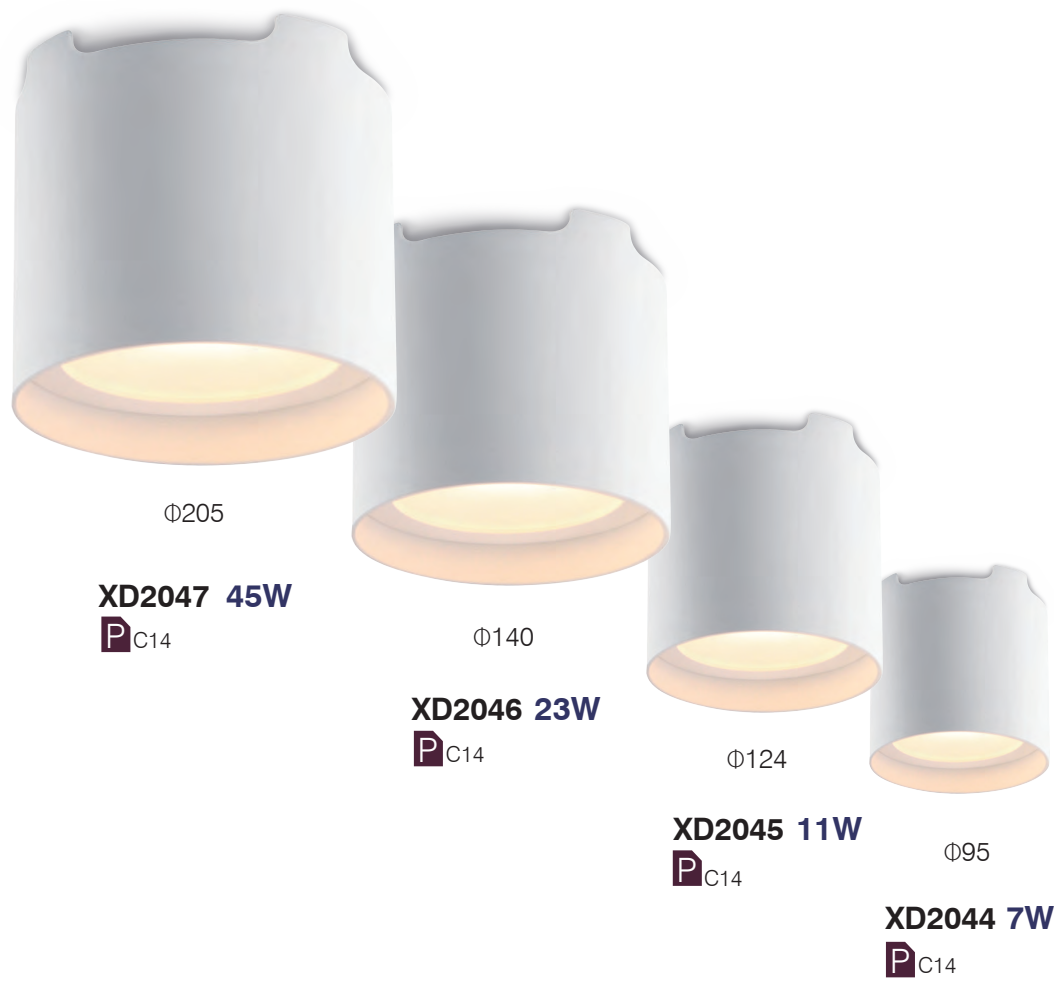

THESE SURFACE MOUNTED LED LIGHTS ARE SPECIALLY DESIGNED WITH A SIMPLE, ELEGANT STYLE TO COMPI MENT ANY HOME INTERIOR WHICH FEATURES A CLASSIC SIMPLE WHITE FINISH ADDING WARM AND WELCOMING DIFFUSED LIGHT. THE DURABLE ALUMINUM CONSTRUCTION ENSURES THAT THIS CEILING LIGHT WILL CONTINUE TO PERFORM WELL. WITH A STRIKING APPEARANCE FOR YEARS TO COME.

SOLID ALUMINUM CONSTRUCTION OFFERS LASTING DURABILITY.

EASY TO INSTALL WITH INCLUDED HARDWARE.

SIMPLE, CLASSIC STYLE WORKS WELL WITH ANY DECOR.

OWL

IP65



XD2055A 32W

P_{C01}

SURFACE MOUNTAD

IP65



XD2055B 32W

P_{C02}




WALL MOUNTED

IP65



WL545A 32W

P_{E19}




IP65



WL545B 32W

P_{E20}



SYSTEM POWER 32W


ALUMINIUM DIE-CASTING MATERIAL

HAS 2 WAYS OF INSTALLATION

NARROW BEAM ANGLE 24°

WIDE BEAM ANGLE 100°

TWIST

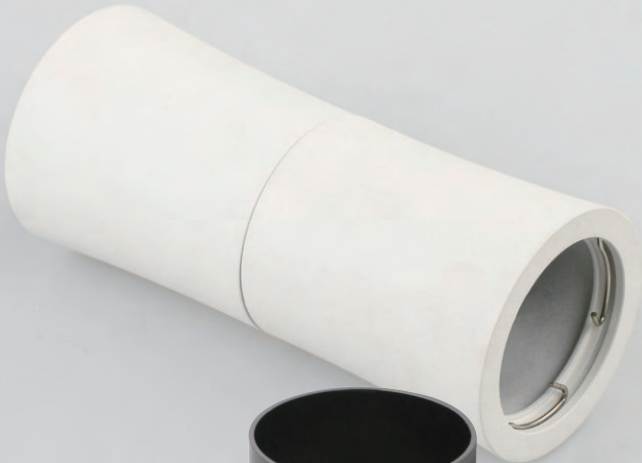

XD2065

P C17



LED GU10




LED MR16



XD2066

P C18

COMBINES CLASSIC CYLINDRICAL SHAPE DESIGN WITH EFFECTIVE HEAT MANAGEMENT
THESE CYLINDRICAL LIGHTING FIXTURES ARE PERFECT FOR MR16 OR GU10 LED BULBS
DIE CAST ALUMINUM CONSTRUCTION.



CONE



KT6697 40W

PA57  Ø170mm



KT6698 40W

PA58  Ø170mm



MHT8583 40W

PB17

HIGH CRI	>80	>95
	>90	



KT6696 40W

PA59  Ø115mm



XD2048 40W

PC11

KETAI IS ONE OF THE MOST RESPECTED NAMES IN ARCHITECTURAL DOWNLIGHTING, WITH A SPECIFIC FOCUS ON ARCHITECTURAL INTEGRATION, OPTICAL PERFORMANCE, RELIABILITY AND INNOVATIVE MANUFACTURING PROCESSES. OUR INNOVATIVE PRODUCTS FEATURE LED LIGHTING SOURCES IN A VARIETY OF OPEN AND LENSED DOWNLIGHTS, DIRECTIONAL RECESSED DOWNLIGHTS SURFACE MOUNTED DOWNLIGHTS, TRACK LIGHTING SYSTEMS AND RETROFIT LUMINAIRES.

TRUE LED FIRE RATED DOWNLIGHTS



Integrated fittings guarantee quality

- ✓ Fire protection you can trust
- ✓ Guarantee performance
- ✓ Unique design ensures airflow
- ✓ 3 year extended warranty



Replacement LED lamps compromise safety & reliability

- ✗ No guarantee of fire safety
- ✗ Not designed to operate with a can
- ✗ Heat build up reduces LED life
- ✗ May void warranty



KT6830 8W

PA75



Φ70MM

BOWL

PERFECTLY COMBINES DESIGN AND FUNCTION. OPTIMIZED PASSIVE COOLING SYSTEM ENSURES LOW TEMPERATURE AND LONG LIFETIME OF LED. FRONT RING PROVIDES GOOD GLARE CONTROL, WHITE BLACK IS STANDARD. ALL BLACK OR WHITE ARE OPTIONAL. A COMBINATION OF PERFECTLY DEVELOPED LENS AND REFLECTOR PROVIDES HIGH PRECISION LIGHT DISTRIBUTION. FOR THE TRACK LIGHTS ADAPTER: 3-PHASE IS STANDARD, 1-PHASE ADAPTER IS AVAILABLE UPON REQUEST.



KT6826 16W

PA16  Ø165mm



XD2077-1 16W

PC21



XD2077-2 16W

PC21

ELEPHANT NOSE



KT6883 10W

PA78



KT6884 20W

PA79



KT6885 38W


PA80



PERFECTLY COMBINES DESIGN AND FUNCTION. OPTIMIZED PASSIVE COOLING SYSTEM ENSURES LOW TEMPERATURE AND LONG LIFETIME OF LED. FRONT RING PROVIDES GOOD GLARE CONTROL, WHITE BLACK IS STANDARD. ALL BLACK OR WHITE ARE OPTIONAL. A COMBINATION OF PERFECTLY DEVELOPED LENS AND REFLECTOR PROVIDES HIGH PRECISION LIGHT DISTRIBUTION. FOR THE TRACK LIGHTS ADAPTER: 3-PHASE IS STANDARD, 1-PHASE ADAPTER IS AVAILABLE UPON REQUEST.




LED LINEAR

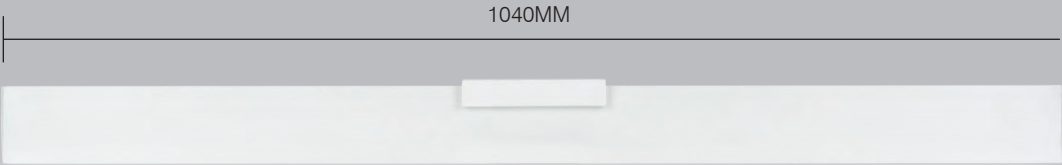


LED WALL WASHER

WL572 20W
P E23

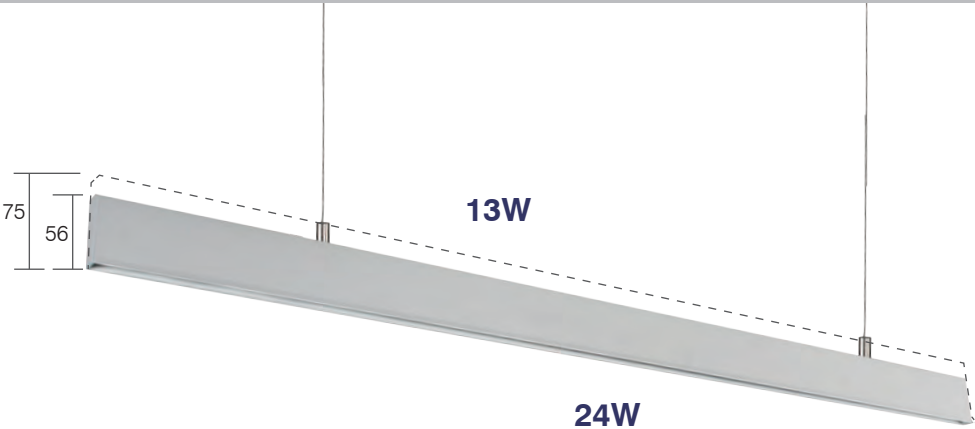

KF1027 1040XH75MM
KF1027A 1040XH56MM

P D15 **37W**



NEW CEILING LIGHT FIXTURES ARE A WONDERFUL WAY TO ADD FRESH STYLE TO YOUR HOME. THEY COME IN MANY DIFFERENT SHAPES AND SIZES. YOU WILL FIND BEAUTIFUL, ENERGY - EFFICIENT CHOICES FOR REPLACING AN EXISTING CEILING LIGHT, AVAILABLE IN A WIDE VARIETY OF STYLES AND FINISHES, THESE EXQUISITE FLUSH MOUNTED DESIGNS ARE IDEAL FOR DRESSING UP ANY SPACE IN YOUR HOME!

MINI - PIPE



SL367 3W

P_{D18}

SL368 3W

P_{D19}

SL369 3W

P_{D20}

PENDANTS

EVERY ROOM NEEDS LIGHT IN ORDER TO BE TRULY COMPLETE. KETAI PROVIDES FAR MORE THAN A SIMPLE FUNCTIONALITY FOR A HOTEL IN THE EVENING; IT CREATES THE ESSENCE OF A SPACE'S AMBIENCE AND ENHANCES IT, MAKING EACH ROOM COME ALIVE. OUR PENDANTS FEATURE DIVERSE SHAPES THAT COMBINE WELL WITH A ROOM'S PERSONALITY, FROM PIPE ROUND TO SQUARE. MANY ARE AVAILABLE IN THE GROUPS OF THREE OR MORE HEIGHTS, MEANING THAT CREATING CLUSTERS OF DESCENDING PENDANTS IS EASY.

INDEX

DOWN LIGHT

FT210	A49
FT210C	A49
FT211	A50
FT211C	A50
H6594F	A81
KT16-1	A60
KT16-2	A60
KT16-3	A60
KT6309	A31
KT6327	A32
KT6344-1	A40
KT6344-2	A40
KT6347	A38
KT6347B	A39
KT6355	A42
KT6355A	A41
KT6550	A14
KT6551	A13
KT6554	A09
KT6560-1	A15
KT6560-2	A15
KT6564	A23
KT6564A	A21
KT6565	A24
KT6565A	A22
KT6566	A74
KT6567-1	A28
KT6567-2	A28
KT6574	A33
KT6577	A17
KT6578	A18
KT6580	A34
KT6583-1	A35
KT6583-2	A35
KT6584-1	A36
KT6584-2	A36
KT6585-1	A37
KT6585-2	A37
KT6594	A01
KT6594A	A03
KT6595	A11
KT6596	A02
KT6596A	A04
KT6598	A47
KT6599	A48

DOWN LIGHT

KT6613	A45
KT6614	A46
KT6631	A43
KT6632	A43
KT6633	A43
KT6634	A43
KT6636	A08
KT6644-1	A29
KT6644-2	A29
KT6644-3	A29
KT6645-1	A30
KT6645-2	A30
KT6645-3	A30
KT6647-1	A07
KT6647-2	A07
KT6648-1	A06
KT6648-2	A06
KT6653	A44
KT6654	A44
KT6655	A44
KT6656	A25
KT6657	A26
KT6658-1	A27
KT6658-2	A27
KT6659-1	A05
KT6659-2	A05
KT6662	A10
KT6664	A44
KT6667	A55
KT6673	A56
KT6679-1	A54
KT6679-2	A54
KT6696	A59
KT6697	A57
KT6698	A58
KT6808A	A51
KT6808B	A52
KT6808C	A53
KT6814-1	A12
KT6814-2	A12
KT6815	A61
KT6816-1	A62
KT6816-2	A62
KT6817	A63
KT6818	A64

DOWN LIGHT

KT6821	A19
KT6822	A20
KT6826	A16
KT6830	A75
KT6857	A67
KT6858	A68
KT6859	A69
KT6860	A70
KT6883	A78
KT6884	A79
KT6885	A80
KT6897	A77
KT6899	A71
KT6900	A71
KT6901	A71
KT6902	A72
KT6903	A72
KT6904	A72
KT6905	A73
KT6906	A73
KT6912-1	A76
KT6912-2	A76
KT6912-3	A76
KT6913	A82
KT6914	A83
KT6915	A84
KT6925	A65-66
KT6926	A65-66
KT6927	A65-66
KT6928	A65-66
KT6929	A65-66
KT6930	A65-66

TRACK LIGHT

MHT8554	B09
MHT8557	B18
MHT8558	B10
MHT8572	B11
MHT8573	B08
MHT8575	B16
MHT8583	B17
MHT8584	B01
MHT8584A	B02
MHT8584B-L20	B04
MHT8584B-L30	B04
MHT8584B-L40	B04
MHT8584H	B03
MHT8585	B05
MHT8585A	B06
MHT8586	B07
KTK1-8587	B13
HKTA-8587	B13
MHT8588	B12
KTKA-8591	B14
HKTA-8591	B14
HC-8591	B14
KTKA1-8592	B15
HKTA-8592	B15
HC8592	B15
MHT8594	B19
MHT8595	B20
MHT8596A	B21
MHT8596B	B22
MHT8597	B23
MHT8604	B24
MHT8605	B24
KTK8801	B25

CEILING LIGHT


XD2017	C09
XD2018	C10
XD2019	C07
XD2020	C08
XD2022A	C03
XD2022-L50	C04
XD2036-1	C05
XD2036-2	C05
XD2044	C14
XD2045	C14
XD2046	C14
XD2047	C14
XD2048	C11
XD2054	C12
XD2055A	C01
XD2055B	C02
XD2059	C13
XD2060	C13
XD2061	C13
XD2065	C17
XD2066	C18
XD2077-1	C21
XD2077-2	C21
XD2078	C15
XD2079	C15
XD2080	C15
XD2081	C22
XD2094	C06
XD2095	C06
XD2096	C20
XD2097	C20
XD2106	C23
XD2107	C23


PENDANT LIGHT

SL356	D03
SL357	D04
SL362A	D07
SL362B	D07
SL362C	D07
SL363A	D08
SL363B	D08
SL363C	D08
SL367	D18
SL368	D19
SL369	D20
KF1014	D05
KF1015	D01
KF1015A	D02
KF1019	D06
KF1020	D06
KF1021	D06
KF1022	D06
KF1028	D11
KF1029	D11
KF1030	D10
KF1031	D10
SL2080	D09

WALL LIGHT

WL391A	E01
WL391E	E18
WL392A	E02
WL393A	E03
WL396	E04
WL396A	E04
WL397A	E05
WL398A	E06
WL536	E07
WL537	E08
WL538	E09
WL539	E10
WL540	E11
WL541	E12
WL542	E13
WL543	E14
WL544	E16
WL545A	E20
WL545B	E19
WL546	E15
WL547	E17
WL548	E21
WL552	E22
WL572	E23

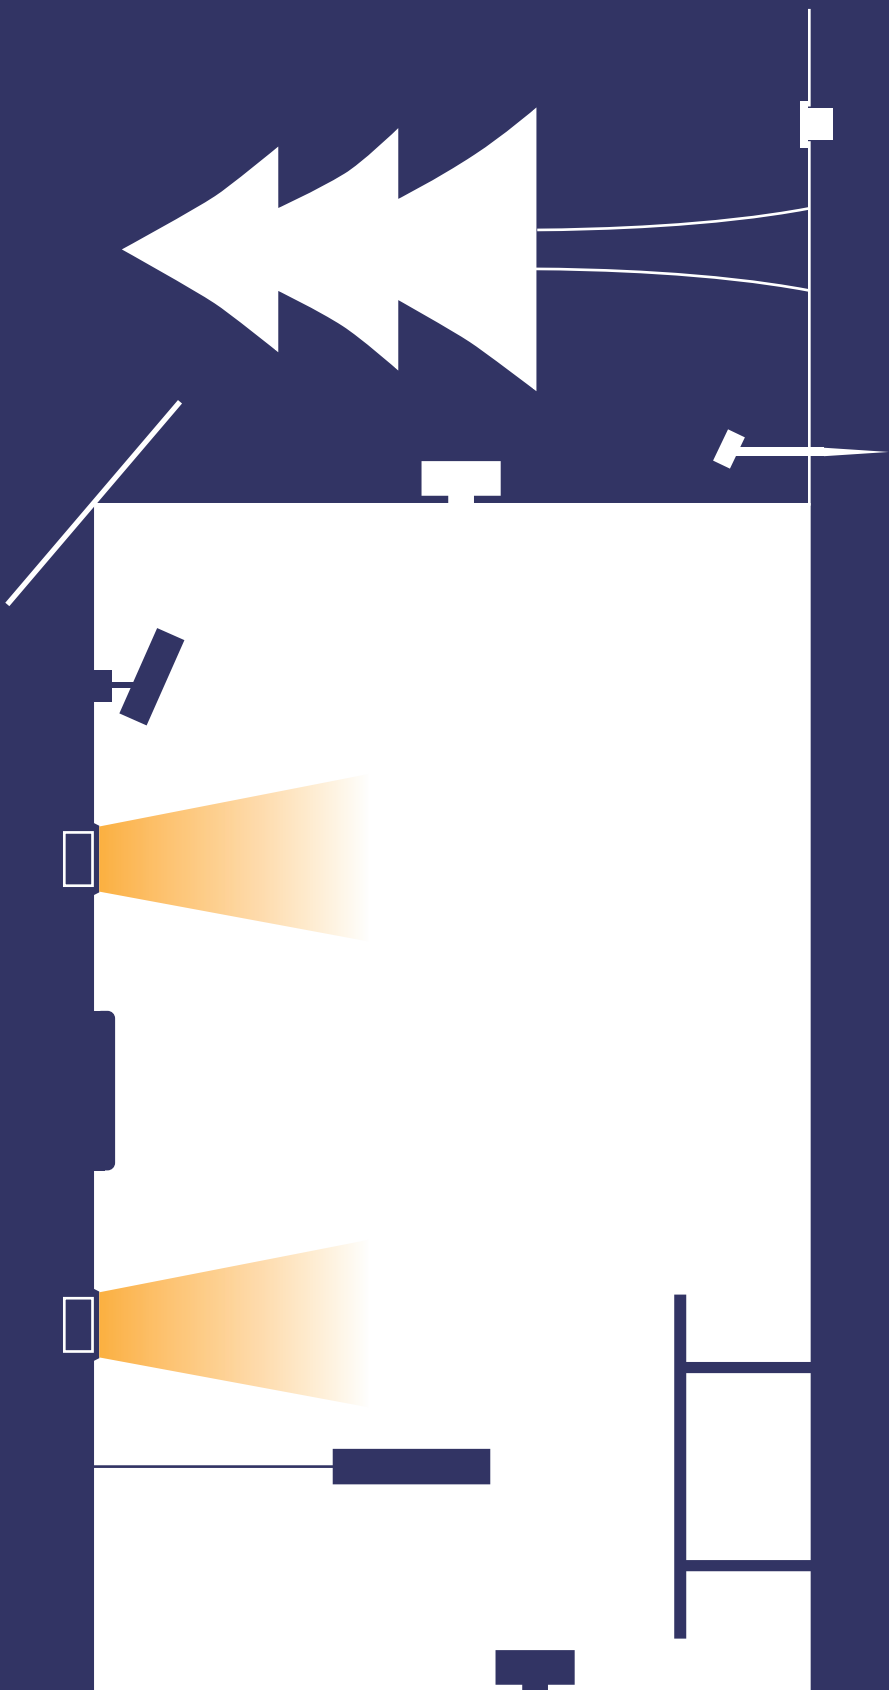

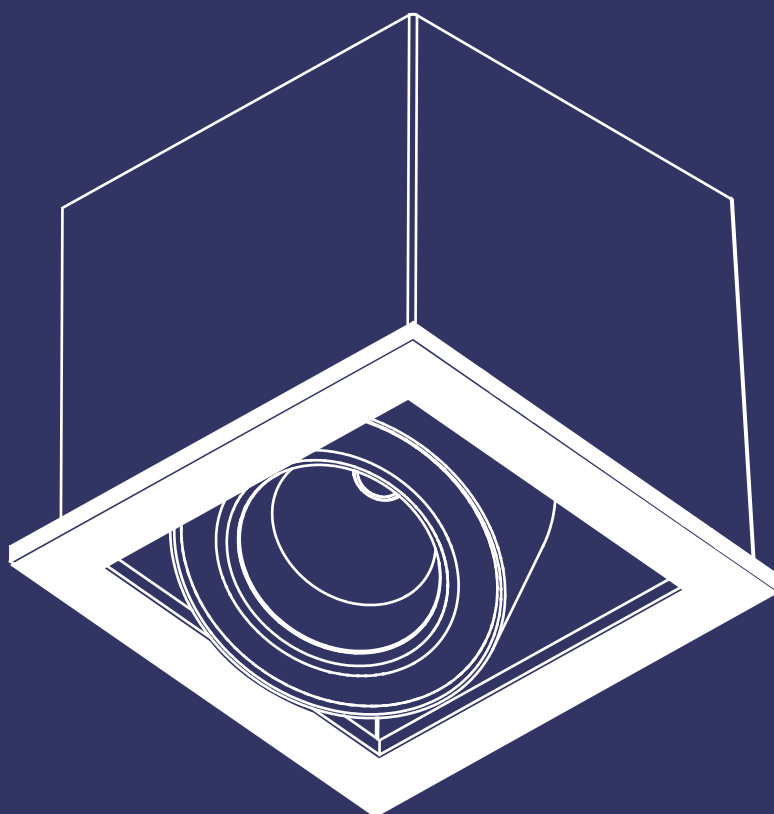

DOWN LIGHT

RECESSED DOWNLIGHT




CE RoHS

HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 60°



KT6594



Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☒ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20

OVERALL DIMENSION: $\Phi 96 \times 52 \text{MM}$

CUTOUT: $\Phi 76 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: > 80


LED OUTPUT: 680LM

SYSTEM OUTPUT: 550LM


LED POWER: 6W

SYSTEM POWER: 7.5W

BEAM: 30°



KT6594-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X330X260MM


PCS/CARTON: 24PCS

CARTON G.W.: 7.5KG

RECESSED DOWNLIGHT



CE RoHS



KT6596



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



>80
>90



3000K
4000K



30° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: $\Phi 96 \times 52 \text{MM}$
CUTOUT: $\Phi 76 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6596-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X330X260MM
PCS/CARTON: 24PCS
CARTON G.W.: 7.5KG

RECESSED DOWNLIGHT




CE RoHS

HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 60°



KT6594A



Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 65

OVERALL DIMENSION: $\Phi 96 \times 52 \text{MM}$

CUTOUT: $\Phi 76 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: > 80


LED OUTPUT: 680LM

SYSTEM OUTPUT: 480LM


LED POWER: 6W

SYSTEM POWER: 7.5W

BEAM: 30°



KT6594A-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X330X260MM


PCS/CARTON: 24PCS

CARTON G.W.: 8KG

RECESSED DOWNLIGHT



CE RoHS



KT6596A



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



>80
>90



3000K
4000K



30° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 65
OVERALL DIMENSION: $\Phi 96 \times 52 \text{MM}$
CUTOUT: $\Phi 76 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 480LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6596A-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X330X260MM
PCS/CARTON: 24PCS
CARTON G.W.: 8KG


RECESSED DOWNLIGHT




CE RoHS



KT6659-1



KT6659-2



Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX


DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ


CCT: 3000K

CRI: >80

BEAM: 30°



KT6659-2-2x7.5W-3000K-30°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6659-1	6W	7.5W	680LM	550LM	Ø100MM	435X315X440MM	24	10KG
KT6659-2	2X6W	2X7.5W	1360LM	1100LM	200X100MM	515X465X400MM	24	19KG


RECESSED DOWNLIGHT



KT6648-1



KT6648-2



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

30° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 30°

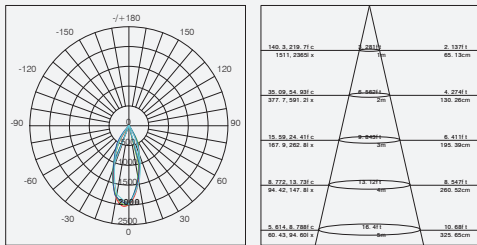

KT6648-2-2x7.5W-3000K-30°

Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6648-1	6W	7.5W	680LM	550LM	88X88MM	435X365X360MM	12	4.3KG
KT6648-2	2X6W	2X7.5W	1360LM	1100LM	188X88MM	390X275X365MM	12	8.5KG


RECESSED DOWNLIGHT




CE RoHS



KT6647-1



KT6647-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

30° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 30°



KT6647-2 -2X7.5W-3000K-30°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6647-1	6W	7.5W	680LM	550LM	96X96MM	435X345X440MM	12	12.5KG
KT6647-2	2X6W	2X7.5W	1360LM	1100LM	181X96MM	295X270X440MM	8	14.6KG

RECESSED DOWNLIGHT



CE RoHS



KT6636

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: $\Phi 104 \times 49 \text{MM}$
CUTOUT: $\Phi 90 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6636-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 390X355X265MM
PCS/CARTON: 24PCS
CARTON G.W.: 9.16KG

RECESSED DOWNLIGHT




CE RoHS

HIGH CRI
>80
>90

CCT
3000K
4000K

BEAM
30° 60°




KT6554

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20

OVERALL DIMENSION: Ø110X45MM

CUTOUT: Ø95MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: >80


LED OUTPUT: 680LM

SYSTEM OUTPUT: 550LM


LED POWER: 6W

SYSTEM POWER: 7.5W

BEAM: 30°



KT6554-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 375X295X425MM


PCS/CARTON: 30 PCS

CARTON G.W.: 8.2KG


RECESSED DOWNLIGHT



CE RoHS

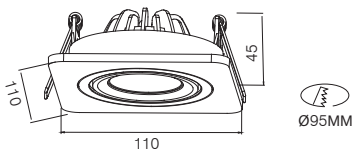

KT6662



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



>80
>90



3000K
4000K



30° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 110X110X75MM
CUTOUT: Ø95MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6662-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 375X295X425MM
PCS/CARTON: 30 PCS
CARTON G.W.: 10.3KG

RECESSED DOWNLIGHT



CE RoHS

HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	30° 60°




KT6595

IP44

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☒ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 44
OVERALL DIMENSION: $\Phi 90 \times 44 \text{MM}$
CUTOUT: $\Phi 80 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6595-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 390X355X240MM
PCS/CARTON: 24PCS
CARTON G.W.: 8.2KG


RECESSED DOWNLIGHT




CE RoHS



KT6814-1



KT6814-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80

>90

CCT

3000K

4000K

BEAM

30°

60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 30°

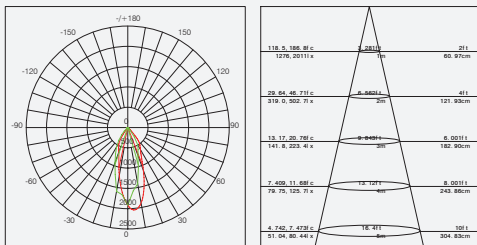

KT6814-2 -2x7.5W-3000K- 30°

Photometric files for other CCT & beam are available


ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6814-1	6W	7.5W	680LM	550LM	Ø80MM	435X315X320MM	24	9.5KG
KT6814-2	2X6W	2X7.5W	1360LM	1100LM	80X170MM	465X275X320MM	12	10KG

RECESSED DOWNLIGHT



CE RoHS

HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 60°

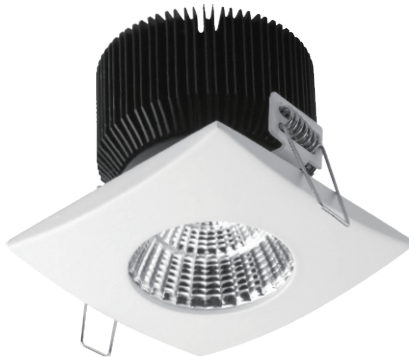


KT6551

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☒ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20

OVERALL DIMENSION: 81X81X75MM

CUTOUT: Ø70MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: >80


LED OUTPUT: 680LM

SYSTEM OUTPUT: 550LM

LED POWER: 6W

SYSTEM POWER: 7.5W

BEAM: 30°



30° 480, 517, 290° c 418, 1, 418, 20° x	2° 210° c 64, 90cm
30° 480, 14, 311° c 104, 0, 104, 11° x	4° 238° c 128, 80cm
4° 238, 0, 361° c 48, 23, 68, 43° x	6° 288° c 194, 70cm
2° 418, 0, 518° c 25, 01, 38, 52° x	8° 317° c 229, 60cm
1° 548, 0, 598° c 15, 54, 25, 63° x	10° 350° c 274, 50cm

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 320X255X430MM


PCS/CARTON: 30 PCS

CARTON G.W.: 13KG

RECESSED DOWNLIGHT



CE RoHS



KT6550

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

30° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø84X75MM
CUTOUT: Ø70MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6550-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 335X225X430MM
PCS/CARTON: 30 PCS
CARTON G.W.: 12.5KG


RECESSED DOWNLIGHT




CE RoHS



KT6560-1



KT6560-2



Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☒ Matte Black RAL 9005



>80
>90



3000K
4000K



30° 60°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX


DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ


CCT: 3000K

CRI: >80

BEAM: 30°




KT6560-2-2x7.5W-3000K-30°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6560-1	6W	7.5W	630LM	550LM	Ø100MM	435X315X440MM	24	10KG
KT6560-2	2X6W	2X7.5W	1260LM	1100LM	200X100MM	515X465X400MM	24	19KG

RECESSED DOWNLIGHT



KT6826

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

15° 25° 38° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 180 \times 79 \text{MM}$
CUTOUT: $\Phi 165 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: EVERCORE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1400LM
SYSTEM OUTPUT: 1100LM
LED POWER: 14W
SYSTEM POWER: 16W
BEAM: 60°



KT6826-16W-3000K-60°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 620X415X380MM
PCS/CARTON: 24 PCS
CARTON G.W.: 15.7KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	30° 60°



KT6577

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: Φ86X75MM
 CUTOUT: Φ78MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: AREEK
 INPUT: 110-230V AC 50/60HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



KT6577-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 522X265X335MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 11.2KG

RECESSED DOWNLIGHT



CE RoHS



KT6578

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 100X100X75MM
CUTOUT: Ø78MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6578-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 540X275X335MM
PCS/CARTON: 24 PCS
CARTON G.W.: 15.6KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	15° 35°



KT6821

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 90X90X84MM
CUTOUT: 81X81MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 1100LM
SYSTEM OUTPUT: 870LM
LED POWER: 8W
SYSTEM POWER: 11W
BEAM: 35°



KT6821-11W-3000K-35°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 360X335X420MM
PCS/CARTON: 24PCS
CARTON G.W.: 9.3KG

RECESSED DOWNLIGHT



CE RoHS



KT6822



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

15° 35°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: $\Phi 94 \times 84 \text{MM}$
CUTOUT: $\Phi 85 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 1100LM
SYSTEM OUTPUT: 870LM
LED POWER: 8W
SYSTEM POWER: 11W
BEAM: 35°



KT6822-11W-3000K-35°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X335X420MM
PCS/CARTON: 24PCS
CARTON G.W.: 9.6KG

RECESSED DOWNLIGHT



CE RoHS

HIGH CRI
>80
>90

CCT
3000K
4000K


BEAM
85°



KT6564A

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 82X82X79MM
CUTOUT: 78X78MM




Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 530LM
SYSTEM OUTPUT: 430LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 85°



KT6564A-7.5W-3000K-85°



Photometric Files For Other Cct & Beam Are Available




Standard Packing Information

CARTON BOX: 360X335X430MM
PCS/CARTON: 24PCS
CARTON G.W.: 9.3KG

RECESSED DOWNLIGHT



CE RoHS



KT6565A

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: Φ83X79MM
CUTOUT: Φ78MM




Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 530LM
SYSTEM OUTPUT: 430LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 85°



KT6565A-7.5W-3000K-85°



Photometric Files For Other Cct & Beam Are Available



Standard Packing Information

CARTON BOX: 360X335X430MM
PCS/CARTON: 24PCS
CARTON G.W.: 9KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 60°



KT6564

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 82X82X79MM
CUTOUT: 78x78MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6564-7.5W-3000K-30°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 360X335X430MM
PCS/CARTON: 24PCS
CARTON G.W.: 9.3KG

RECESSED DOWNLIGHT



CE RoHS



KT6565

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



>80
>90



3000K
4000K



30° 60°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: Φ83X79MM
CUTOUT: Φ78MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°




Standard Packing Information

CARTON BOX: 360X335X430MM
PCS/CARTON: 24PCS
CARTON G.W.: 9KG



KT6565-7.5W-3000K-30°




Photometric files for other CCT & beam are available

RECESSED DOWNLIGHT



KT6567-1




Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



KT6567-2



HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

18° 30°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 18°



KT6567-1 -26W-3000K-18°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6567-1	23W	26W	2300LM	1800LM	170X170MM	650X240X430MM	6	14KG
KT6567-2	2X23W	2X26W	4300LM	3500LM	170X320MM	475X375X220MM	2	10KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	18° 20°



KT6309

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: Ø136X108MM
CUTOUT: Ø125MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 1500LM
SYSTEM OUTPUT: 1200LM
LED POWER: 14W
SYSTEM POWER: 16W
BEAM: 18°



KT6309-16W-3000K-18°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 435 x 310 x 265MM
PCS/CARTON: 12 PCS
CARTON G.W.: 12KG

RECESSED DOWNLIGHT



CE RoHS



KT6327

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



>80
>90



3000K
4000K



18° 20°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø112X105MM
CUTOUT: Ø95MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 1500LM
SYSTEM OUTPUT: 1200LM
LED POWER: 14W
SYSTEM POWER: 16W
BEAM: 18°



KT6327-16W-3000K-18°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 470X315X455MM
PCS/CARTON: 18 PCS
CARTON G.W.: 15KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	18° 20°



KT6574

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: 110X110X102MM
CUTOUT: Ø100MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 1500LM
SYSTEM OUTPUT: 1200LM
LED POWER: 14W
SYSTEM POWER: 16W
BEAM: 18°



KT6574-16W-3000K-18°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 360X245X460MM
PCS/CARTON: 24PCS
CARTON G.W.: 19KG

RECESSED DOWNLIGHT



CE RoHS



KT6580

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø86X95MM
CUTOUT: Ø78MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 1500LM
SYSTEM OUTPUT: 1200LM
LED POWER: 14W
SYSTEM POWER: 16W
BEAM: 18°



KT6580-12W-3000K-18°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 350X190X265MM
PCS/CARTON: 18PCS
CARTON G.W.: 18KG


RECESSED DOWNLIGHT




CE RoHS



KT6583-1



KT6583-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80

>90

CCT

3000K

4000K

BEAM

10° 18°

24° 30°

40° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 18°



KT6583-2-25W-3000K-18°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6583-1	22W	25W	1900LM	1500LM	Φ130MM	325X325X380MM	16	15KG
KT6583-2	2X22W	2X25W	3300LM	2600LM	280X130MM	425X360X325MM	6	13KG


RECESSED DOWNLIGHT



KT6584-1



KT6584-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80

>90

CCT

3000K

4000K

BEAM

10° 18°

24° 30°

40° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 30°



KT6584-2-25W-3000K-30°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6584-1	22W	25W	1900LM	1500LM	Ø130MM	405X365X290MM	12	13KG
KT6584-2	2X22W	2X25W	3300LM	2600LM	280X130MM	435X360X290MM	6	13KG


RECESSED DOWNLIGHT




CE RoHS



KT6585-1



KT6585-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80

>90

CCT

3000K

4000K

BEAM

10° 18°

24° 30°

40° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 30°



KT6585-25W-3000K-30°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6585-1	22W	25W	1900LM	1500LM	168X155MM	465X465X350MM	12	16KG
KT6585-2	2X22W	2X25W	3300LM	2600LM	310X168MM	465X400X320MM	6	17KG

RECESSED DOWNLIGHT



CE RoHS



KT6347

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



>80
>90



3000K
4000K



37°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø175X49MM
CUTOUT: Ø165MM



Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 500LM
SYSTEM OUTPUT: 400LM
LED POWER: 9W
SYSTEM POWER: 11W
BEAM: 37°



KT6347-11W-3000K-37°

E(lx)	h(m)	37.38 °	Ø(cm)
1011	1		149.91
863	2		299.81
425	3		499.72
44	4		599.63
18	5		749.54

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 395X385X390MM
PCS/CARTON: 20 PCS
CARTON G.W.: 17KG

RECESSED DOWNLIGHT



CE RoHS

HIGH
CRI >80
>90

CCT 3000K
4000K

BEAM 18° 22° 30°




KT6347B

Trim Finish Optional:

□ Matte White RAL 9016

■ Matte Grey RAL 9006

■ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20

OVERALL DIMENSION: Ø175X49MM

CUTOUT: Ø165MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 220-240V AC 50/60HZ

CCT: 3000K

CRI: >80


LED OUTPUT: 2200LM

SYSTEM OUTPUT: 1800LM

LED POWER: 17W

SYSTEM POWER: 20W

BEAM: 22°



KT6347B-20W-3000K-22°

h(m)	22.52°	Ø(cm)
1		39.82
2		75.65
3		119.47
4		159.30
5		199.12

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 395X385X390MM

PCS/CARTON: 20 PCS

CARTON G.W.: 17.3KG


RECESSED DOWNLIGHT



CE RoHS



KT6344-1




Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



KT6344-2



HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

18° 30°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80/90
BEAM: 18°



KT6344-12W-3000K-18°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6344-1	12W	16W	1500LM	1200LM	150X150MM	405X335X425MM	12	13.6KG
KT6344-2	2X12W	2X16W	2800LM	2300LM	275X150MM	405X315X425MM	6	12.4KG

CE RoHS

Trim Finish Optional:


- ☐ Matte White RAL 9016
☐ Matte Grey RAL 9006
☐ Matte Black RAL 9005

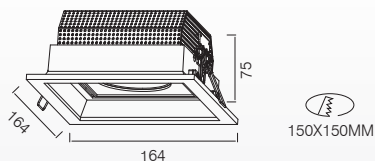


MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: 164X164X75MM
CUTOUT: 150X150MM



LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1800LM
SYSTEM OUTPUT: 1500LM
LED POWER: 18W
SYSTEM POWER: 20W
BEAM: 24°



KT6355A-20W-3000K-24°



Photometric files for other CCT & beam
are available




CARTON BOX: 465X405X320MM
PCS/CARTON: 16 PCS
CARTON G.W.: 14KG

RECESSED DOWNLIGHT



CE RoHS

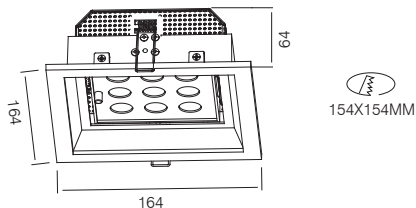

KT6355

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 164X164X64MM
CUTOUT: 154X154MM




Standard Optical & Electrical Characteristics

LED BRAND: CREE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1000LM
SYSTEM OUTPUT: 850LM
LED POWER: 9W
SYSTEM POWER: 12W
BEAM: 25°



KT6355-12W-3000K-25°



Photometric Files For Other Cct & Beam Are Available




Standard Packing Information

CARTON BOX: 465X405X320MM
PCS/CARTON: 16 PCS
CARTON G.W.: 13.6KG

RECESSED DOWNLIGHT




KT6631



BEAM: 28°




KT6632



BEAM: 24°




KT6633



BEAM: 24°




KT6634



BEAM: 28°

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: CITIEZN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6631	9W	11W	1080LM	900LM	Ø100MM	465X405X340MM	24	8.2KG
KT6632	14W	17W	1680LM	1400LM	Ø120MM	540X455X305MM	18	9.1KG
KT6633	22W	26W	2400LM	2000LM	Ø145MM	455X415X305MM	12	8.8KG
KT6634	34W	40W	3600LM	3000LM	Ø185MM	425X220X420MM	6	7.6KG


RECESSED DOWNLIGHT



CE RoHS




KT6664



BEAM: 90°




KT6653



BEAM: 90°




KT6654



BEAM: 90°



KT6655



BEAM: 90°

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6664	6W	7W	570LM	450LM	Ø100MM	465X405X340MM	24	8.7KG
KT6653	12W	15W	1100LM	900LM	Ø120MM	540X455X305MM	18	9.4KG
KT6654	20W	22W	1900LM	1500LM	Ø145MM	455X415X305MM	12	8.9KG
KT6655	40W	45W	3200LM	2600LM	Ø185MM	505X295X350MM	6	8KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	38°



KT6613

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: Ø82X73MM
CUTOUT: Ø76MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 38°



KT6613-7.5W-3000K-38°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X335X365MM
PCS/CARTON: 24 PCS
CARTON G.W.: 7KG

RECESSED DOWNLIGHT



KT6614

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

35°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 109 \times 73 \text{MM}$
CUTOUT: $\Phi 102 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 35°



KT6614-7.5W-3000K-35°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 410X210X255MM
PCS/CARTON: 24 PCS
CARTON G.W.: 11KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30°



KT6598

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: Ø87X73MM
CUTOUT: Ø60MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6598-7.5W-3000K-30°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 330X315X280MM
PCS/CARTON: 24 PCS
CARTON G.W.: 4.5KG

RECESSED DOWNLIGHT



KT6599

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

30°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 78 \times 71 \text{MM}$
CUTOUT: $\Phi 69 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



KT6599-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 400X400X180MM
PCS/CARTON: 24 PCS
CARTON G.W.: 5KG


RECESSED DOWNLIGHT




CE RoHS



FT210



FT210C



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

110°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 110°



FT210-3W-3000K-110°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
FT210	2W	3W	150LM	120LM	Ø60MM	580X580X170MM	200	19KG
FT210C	2W	3W	150LM	120LM	NO	580X580X170MM	200	20KG


RECESSED DOWNLIGHT




CE RoHS



FT211



FT211C



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

110°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 110°



FT211-3W-3000K-110°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
FT211	2W	3W	150LM	120LM	60X60MM	580X580X170MM	200	22KG
FT211C	2W	3W	150LM	120LM	NO	580X580X170MM	200	23KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	25°



KT6808A

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

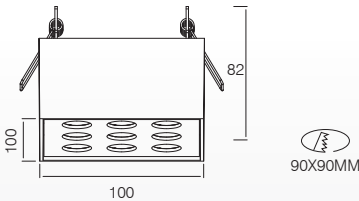


Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: 100X100X82MM
CUTOUT: 90X90MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1000LM
SYSTEM OUTPUT: 850LM
LED POWER: 9W
SYSTEM POWER: 12W
BEAM: 50°



KT6808A-12W-3000K-25°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 520X265X335MM
PCS/CARTON: 24 PCS
CARTON G.W.: 15.6KG

RECESSED DOWNLIGHT



CE RoHS



KT6808B

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

24° 36°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 100X100X82MM
CUTOUT: 90X90MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1500LM
SYSTEM OUTPUT: 1200LM
LED POWER: 14W
SYSTEM POWER: 16W
BEAM: 24°



KT6808B-16W-3000K-24°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 520X265X335MM
PCS/CARTON: 24 PCS
CARTON G.W.: 13KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	24° 36°



KT6808C

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

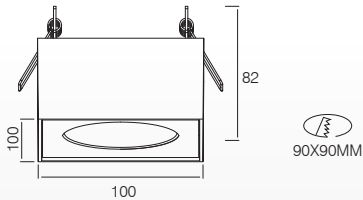


Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: 100X100X82MM
CUTOUT: 90X90MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1250LM
SYSTEM OUTPUT: 1000LM
LED POWER: 14W
SYSTEM POWER: 16W
BEAM: 24°



KT6808C-16W-3000K-24°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 520X265X335MM
PCS/CARTON: 24 PCS
CARTON G.W.: 13.4KG


RECESSED DOWNLIGHT



KT6679-1



KT6679-2



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

25°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50HZ
CCT: 3000K
CRI: >80
BEAM: 25°



KT6679-2X43W-3000K-25°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6679-1	38W	43W	3500LM	2800LM	225X225MM	585X295X425MM	6	12KG
KT6679-2	2X38W	2X43W	7100LM	5700LM	420X225MM	495X295X560MM	4	16KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	25°



KT6667

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 198 \times 133 \text{MM}$
CUTOUT: $\Phi 185 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 3500LM
SYSTEM OUTPUT: 2800LM
LED POWER: 38W
SYSTEM POWER: 43W
BEAM: 25°




Standard Packing Information

CARTON BOX: 495X250X470MM
PCS/CARTON: 6 PCS
CARTON G.W.: 15KG

RECESSED DOWNLIGHT



CE RoHS



KT6673

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



>80
>90



3000K
4000K



25°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø217X158MM
CUTOUT: Ø206MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 3500LM
SYSTEM OUTPUT: 2800LM
LED POWER: 38W
SYSTEM POWER: 43W
BEAM: 25°



KT6673-43W-3000K-25°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 535X270X545MM
PCS/CARTON: 6 PCS
CARTON G.W.: 16KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15° 25°



KT6697

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☒ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 180 \times 87 \text{MM}$
CUTOUT: $\Phi 170 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 4000LM
SYSTEM OUTPUT: 3200LM
LED POWER: 38W
SYSTEM POWER: 40W
BEAM: 25°



KT6697-40W-3000K-25°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 435X435X320MM
PCS/CARTON: 12 PCS
CARTON G.W.: 13KG

RECESSED DOWNLIGHT



CE RoHS



KT6698

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K 4000K	BEAM	15° 25°
	>90				
	>95				



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Φ180X100MM
CUTOUT: Φ170MM



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 4000LM
SYSTEM OUTPUT: 3200LM
LED POWER: 38W
SYSTEM POWER: 40W
BEAM: 25°



Standard Packing Information

CARTON BOX: 475X435X365MM
PCS/CARTON: 12PCS
CARTON G.W.: 16KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15° 25°



KT6696

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 146 \times 131 \text{MM}$
CUTOUT: $\Phi 115 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 4000LM
SYSTEM OUTPUT: 3200LM
LED POWER: 38W
SYSTEM POWER: 40W
BEAM: 25°



KT6696-40W-3000K-25°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 435X435X440MM
PCS/CARTON: 12 PCS
CARTON G.W.: 15KG


RECESSED DOWNLIGHT




KT16-1



KT16-2



KT16-3



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

90°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 90°



KT16-1-8W-3000K-90°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT16-1	7W	8W	630LM	500LM	Ø75MM	520X255X350MM	50	21.5KG
KT16-2	2X7W	2X8W	1400LM	1100LM	2XØ75MM	500X435X280MM	32	21.8KG
KT16-3	3X7W	3X8W	1900LM	1500LM	3XØ75MM	500X335X415MM	24	25.6KG

RECESSED DOWNLIGHT



CE RoHS



KT6815




Trim Finish Optional:

□ Matte White RAL 9016

■ Matte Grey RAL 9006

■ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20

OVERALL DIMENSION: Ø112X73MM

CUTOUT: Ø100MM



Standard Optical & Electrical Characteristics

LED BRAND: LUMENS

INPUT: 220-240V AC 50/60HZ

CCT: 3000K


CRI: >80

LED OUTPUT: 760LM


SYSTEM OUTPUT: 610LM

SYSTEM POWER: 8W

BEAM: 40°



KT6815-8W-3000K-40°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X335X420MM


PCS/CARTON: 24 PCS

CARTON G.W.: 12.5KG

RECESSED DOWNLIGHT



KT6816-1




Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



KT6816-2



HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

40°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
INPUT: 220-240V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 40°

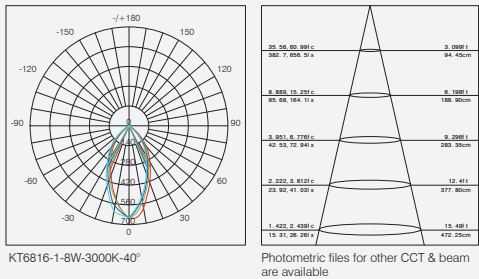

ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6816-1	8W	760LM	610LM	Φ100MM	425X425X515MM	24	12KG
KT6816-2	2X8W	1520LM	1220LM	200X100MM	425X425X515MM	12	11.5KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30° 50°



KT6817

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 98 \times 73 \text{MM}$
CUTOUT: $\Phi 70 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 780LM
SYSTEM OUTPUT: 620LM
LED POWER: 7W
SYSTEM POWER: 10W
BEAM: 30°



KT6817-10W-3000K-30°

87.70, 139.30°	1.58801	47.78cm
84.4, 0.14201		
21.82, 33.33°	3.13201	95.57cm
235.0, 338.81		
9.744, 14.817	4.70201	143.35cm
154.9, 159.51		
5.481, 8.333	6.27101	191.13cm
39.10, 69.69		
3.708, 5.333	7.85001	238.90cm
37.75, 57.401		

Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 360X335X420MM
PCS/CARTON: 24PCS
CARTON G.W.: 12KG

RECESSED DOWNLIGHT



CE RoHS



KT6818

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

30° 50°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: 98X98X73MM
CUTOUT: 70X70MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 780LM
SYSTEM OUTPUT: 620LM
LED POWER: 7W
SYSTEM POWER: 10W
BEAM: 30°



KT6818-10W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 360X330X260MM
PCS/CARTON: 24PCS
CARTON G.W.: 12.5KG

RECESSED DOWNLIGHT



CE RoHS



HIGH CRI	>80
CCT	3000K 4000K
BEAM	48°





KT6925

Trim Finish Optional:



- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005





KT6926





KT6929





KT6927



KT6930



KT6928






Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CREE
DRIVER BRAND: AREEK
INPUT : 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
BEAM: 48°



KT6925-3W-3000K-48°




Photometric files for other CCT & beam are available

ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6925	3W	212LM	170LM	45X44MM	375x305x375mm	100	12KG
KT6926	6W	412LM	330LM	45X74MM	475x400x425mm	100	18KG
KT6927	8W	600LM	480LM	45X104MM	475x400x275mm	50	13KG
KT6928	11W	930LM	745LM	45X134MM	475x400x335mm	50	16KG
KT6929	13W	1160LM	930LM	45X164MM	475x400x395mm	50	19KG
KT6930	16W	1450LM	1160LM	45X174MM	475x400x415mm	50	22KG

RECESSED DOWNLIGHT



CE RoHS



- KT6899** Ø83XH80MM
- KT6900** Ø110XH110MM
- KT6901** Ø150XH130MM



★ AC As Optional

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

90°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20



Standard Optical & Electrical Characteristics


LED BRAND: LUMINUS
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6899	12W	15W	1300LM	1050LM	Ø76MM	500X255X380MM	24	6KG
KT6900	28W	30W	2600LM	2100LM	Ø100MM	435X295X505MM	24	12KG
KT6901	37W	40W	3500LM	2800LM	Ø135MM	555X395X230MM	12	18KG

RECESSED DOWNLIGHT



CE RoHS



- KT6902** 82X82XH80MM
- KT6903** 110X110XH115MM
- KT6904** 150X150XH136MM

AC As Optional

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

90°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20



Standard Optical & Electrical Characteristics


LED BRAND: LUMINUS
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6902	12W	15W	1300LM	1050LM	76X76MM	500X255X380MM	24	6KG
KT6903	28W	30W	2600LM	2100LM	100X100MM	465X315X545MM	24	12KG
KT6904	37W	40W	3500LM	2800LM	135X135MM	585X395X665MM	24	18KG

RECESSED DOWNLIGHT



CE RoHS



KT6905 Ø110XH105MM

KT6906 Ø150XH120MM



AC As Optional

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: LUMENS

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K


CRI: >80

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN	G.W.
KT6905	28W	30W	2600LM	2100LM	Ø100MM	465X315X505MM	24	12KG
KT6906	37W	40W	3500LM	2800LM	Ø135MM	555X395X470MM	18	14KG

RECESSED DOWNLIGHT



CE RoHS



KT6566

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI

>80

>90

CCT

3000K

4000K

BEAM

18°

30°

60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: Ø125X126MM
CUTOUT: Ø115MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 2200LM
SYSTEM OUTPUT: 1770LM
LED POWER: 23W
SYSTEM POWER: 26W
BEAM: 18°



KT6566-26W-3000K-18°

E (lx)	h (m)	20.58 °	Ø (cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 480X325X345MM
PCS/CARTON: 12PCS
CARTON G.W.: 14.6KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	36°



KT6830

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 65
OVERALL DIMENSION: Ø98X73MM
CUTOUT: Ø70MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
INPUT: 120V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 710LM
SYSTEM OUTPUT: 570LM
LED POWER: 7W
SYSTEM POWER: 8W
BEAM: 36°



KT6830-8W-3000K-36°



Photometric files for other CCT & beam are available




Standard Packing Information


CARTON BOX: 520X270X275XMM
PCS/CARTON: 24 PCS
CARTON G.W.: 9.1KG



KT6912-3




KT6912-2



TRIMLESS



KT6912-1



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☒ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

16° 24° 30° 38°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: OSRAM
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 30°

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CUTOUT	CARTON SIZE	PCS/CTN
KT6912-1	28W	30W	2800LM	2225LM	151X149mm	640x440x530mm	24
KT6912-2	2X28W	2X30W	5560LM	4450LM	301X149mm	640X440X530mm	12
KT6912-3	3X28W	3X30W	8300LM	6675LM	451X149mm	640X505X530mm	8

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	56°



KT6897

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 109 \times 77 \text{MM}$
CUTOUT: $\Phi 95 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 56°



KT6897-7.5W-3000K-56°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 435X275X420MM
PCS/CARTON: 24 PCS
CARTON G.W.: 10.3KG

RECESSED DOWNLIGHT



CE RoHS



KT6883

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

17°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: Ø95X72MM
CUTOUT: Ø88MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: PHILIPS
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 880LM
SYSTEM OUTPUT: 710LM
LED POWER: 8W
SYSTEM POWER: 10W
BEAM: 17°



KT6883-10W-3000K-17°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 375X255X285MM
PCS/CARTON: 18 PCS
CARTON G.W.: 12.5KG

RECESSED DOWNLIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	21°



KT6884

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Φ 150X120MM
CUTOUT: Φ 143MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: PHILIPS
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 2500LM
SYSTEM OUTPUT: 2000LM
LED POWER: 18W
SYSTEM POWER: 20W
BEAM: 21°



KT6884-20W-3000K-21°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 330X330X435MM
PCS/CARTON: 12 PCS
CARTON G.W.: 13.5KG

RECESSED DOWNLIGHT



CE RoHS



KT6885

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

15°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: Ø1185X145MM
CUTOUT: Ø178MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: PHILIPS
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT:3800LM
SYSTEM OUTPUT: 3040LM
LED POWER: 36W
SYSTEM POWER: 38W
BEAM: 15°



Standard Packing Information

CARTON BOX: 400X400X355MM
PCS/CARTON: 8 PCS
CARTON G.W.: 12.3KG



KT6885-38W-3000K-15°

0.00, 0.13811 x	2.311	0.00000
1.0000, 1.44886 x	2.311	25.96cm
2.00, 2.045, 31 x	2.311	1.709m
2.00, 2.045, 31 x	2.311	91.96cm
1.00, 2.045, 31 x	2.311	2.000m
1.116, 1.0000 x	2.311	77.95cm
2.00, 2.045, 31 x	2.311	2.409m
2.00, 2.045, 31 x	2.311	100.91cm
2.00, 2.045, 31 x	2.311	4.000m
2.00, 2.045, 31 x	2.311	120.85cm

Photometric files for other CCT & beam are available

RECESSED DOWNLIGHT



CE RoHS

HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	21°




H6594F



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

battery can last 3-4 hours





Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Φ 180X63MM
CUTOUT: Φ 165MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: PHILIPS
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 415X415X340MM
PCS/CARTON: 16 PCS
CARTON G.W.: 12.3KG

RECESSED DOWNLIGHT



KT6915

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

28°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: Ø90X50MM
CUTOUT: Ø80MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: TRIDONIC
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 960LM
SYSTEM OUTPUT: 770LM
LED POWER: 7W
SYSTEM POWER: 8W
BEAM: 28°



KT6915-8W-3000K-28°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 375x350x425MM
PCS/CARTON: 30 PCS
CARTON G.W.: 9.3KG

RECESSED DOWNLIGHT



CE RoHS

HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	110°




KT6845B

AC As Optional

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

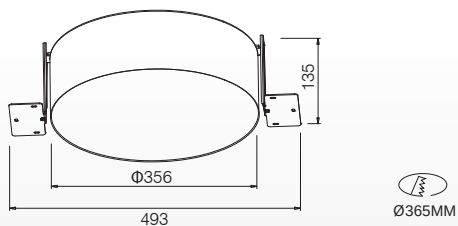


Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 356 \times 109 \text{MM}$
CUTOUT: $\Phi 365 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: EDISON
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 2400LM
SYSTEM OUTPUT: 1920LM
LED POWER: 26W
SYSTEM POWER: 30W
BEAM: 110°



KT6845C-30W-3000K-110°





Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 395X395X540MM
PCS/CARTON: 4 PCS
CARTON G.W.: 6.1KG

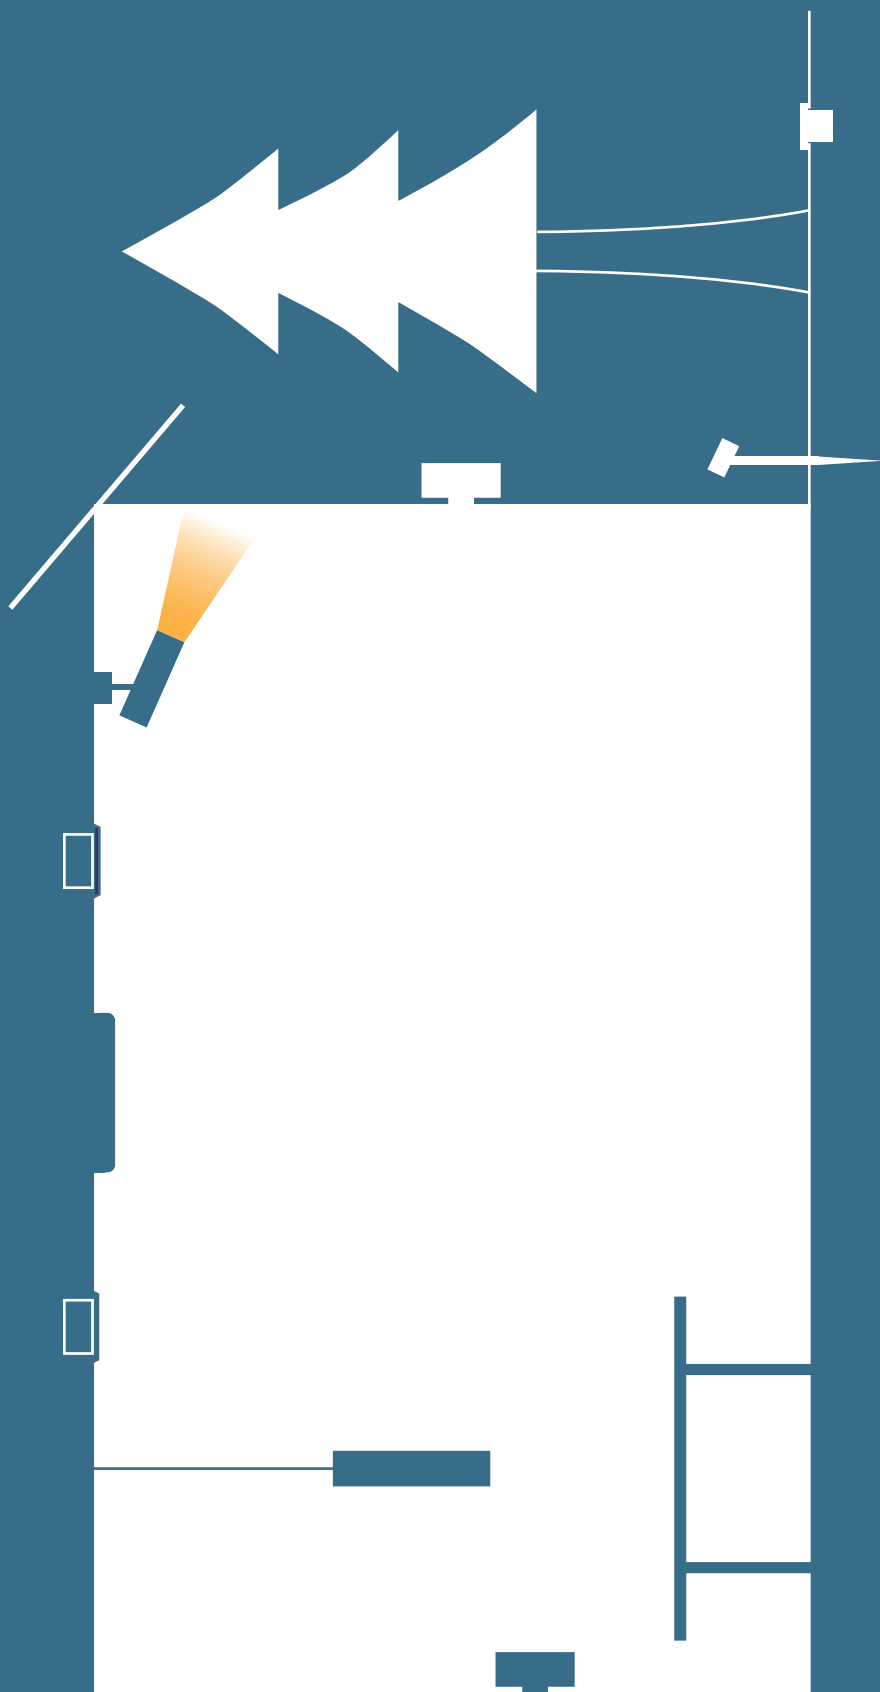

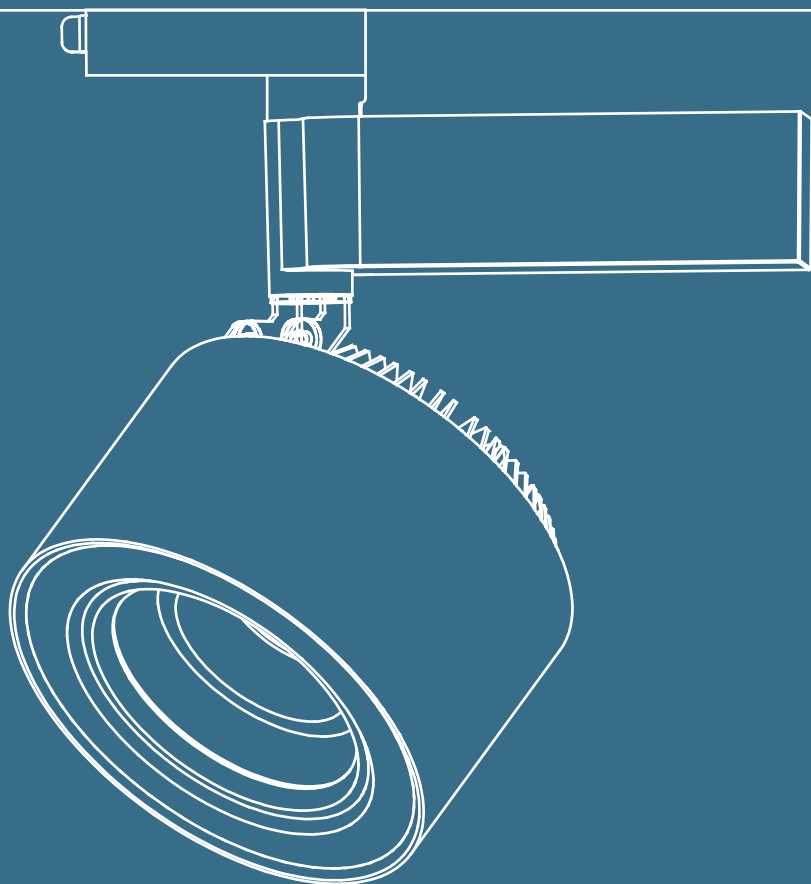

TRACK LIGHT

TRACK LIGHT



CE RoHS

HIGH CRI
>80
>90

CCT
3000K
4000K


BEAM
15° 24° 45°



MHT8584

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø96X124XH233MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 3000LM
SYSTEM OUTPUT: 2400LM
LED POWER: 25W
SYSTEM POWER: 30W
BEAM: 15°



MHT8584-30W-3000K-15°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 595X495X335MM
PCS/CARTON: 12PCS
CARTON G.W.: 12KG

TRACK LIGHT



MHT8584A



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

15° 24° 45°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: Ø95X114XH200MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
INPUT: 220-240V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 3000LM
SYSTEM OUTPUT: 2400LM
SYSTEM POWER: 30W
BEAM: 15°



MHT8584A-30W-3000K-15°



Photometric Files For Other Cct & Beam Are Available



Standard Packing Information

CARTON BOX: 415X255X420MM
PCS/CARTON: 8PCS
CARTON G.W.: 8.1KG

TRACK LIGHT



CE RoHS

HIGH
CRI
>80
>90


CCT
3000K
4000K

BEAM
24° 40° 60°

MHT8584H



★ AC



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø95X114XH329MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
INPUT: 220-240V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 4250LM
SYSTEM OUTPUT: 3400LM
SYSTEM POWER: 40W
BEAM: 24°



MHT8584-40W-3000K-24°




Photometric Files For Other Cct & Beam Are Available



Standard Packing Information

CARTON BOX: 495X335X485MM
PCS/CARTON: 6PCS
CARTON G.W.: 11KG

TRACK LIGHT



MHT8584B-L20 Ø95X114X322mm

MHT8584B-L30 Ø95X114X472mm

MHT8584B-L40 Ø95X114X672mm

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

10° 18° 30° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
BEAM: 18°



MHT8584B-40W-3000K-18°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
MHT8584B-L20	36W	40W	4250LM	3400LM	370X475X460mm	8	11KG
MHT8584B-L30	36W	40W	4250LM	3400LM	500X475X360mm	8	12KG
MHT8584B-L40	36W	40W	4250LM	3400LM	700X475X360mm	8	14KG

TRACK LIGHT



CE RoHS

HIGH
CRI
>80
>90

CCT
3000K
4000K


BEAM
24°



MHT8585

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 125 \times 144 \times H261 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: HEP
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 4250LM
SYSTEM OUTPUT: 3400LM
LED POWER: 36W
SYSTEM POWER: 40W
BEAM: 24°



MHT8585-40W-3000K-24°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 495X320X560MM
PCS/CARTON: 8PCS
CARTON G.W.: 11KG



MHT8585A



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

24°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: $\Phi 126 \times 127 \times H230 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
INPUT: 220-240V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 4250LM
SYSTEM OUTPUT: 3400LM
SYSTEM POWER: 40W
BEAM: 24°



MHT8585A-22W-3000K-24°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 570X405X295MM
PCS/CARTON: 20PCS
CARTON G.W.: 34KG

TRACK LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	25°



MHT8586

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 145 \times 149 \times 258 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: HEP
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 6800LM
SYSTEM OUTPUT: 5500LM
LED POWER: 55W
SYSTEM POWER: 60W
BEAM: 25°



MHT8586-60W-3000K-25°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 495X335X485MM
PCS/CARTON: 6PCS
CARTON G.W.: 14KG

TRACK LIGHT



MHT8573

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

15° 25° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: $\Phi 143 \times H97 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 5400LM
SYSTEM OUTPUT: 4340LM
LED POWER: 46W
SYSTEM POWER: 50W
BEAM: 15°



MHT8573-50W-3000K-15°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 545X285XH455MM
PCS/CARTON: 6PCS
CARTON G.W.: 10KG

TRACK LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	18° 30°



MHT8554

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 125 \times 70 \times H143.5 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 2750LM
SYSTEM OUTPUT: 2200LM
LED POWER: 23W
SYSTEM POWER: 26W
BEAM: 18°



MHT8554-26W-3000K-18°

E(h)	h(m)	20.58 °	Ø(cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94

Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 445X340X380MM
PCS/CARTON: 8PCS
CARTON G.W.: 11KG

TRACK LIGHT



CE RoHS



MHT8558

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

18° 30°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: $\Phi 125 \times 70 \times H229 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 2750LM
SYSTEM OUTPUT: 2200LM
LED POWER: 23W
SYSTEM POWER: 26W
BEAM: 18°



MHT8558-26W-3000K-18°

E (lx)	h (m)	20.58 °	Ø (cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 445X340XH380MM
PCS/CARTON: 8PCS
CARTON G.W.: 11KG



HIGH
CRI >80
>90

CCT 3000K
4000K

BEAM 18° 30°




MHT8572

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20

OVERALL DIMENSION: Φ125X70XH140MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: > 80


LED OUTPUT: 2750LM

SYSTEM OUTPUT: 2200LM

LED POWER: 23W

SYSTEM POWER: 26W

BEAM: 18°



MHT8572-26W-3000K-18°

E(lx)	h(m)	20.58 °	Ø(cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94

Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 570X200X250MM

PCS/CARTON: 6PCS

CARTON G.W.: 11KG




MHT8588



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RAL 9016
 IP: 20
 OVERALL DIMENSION: Ø80X148MM



Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
 INPUT: 220-240V AC 50HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 760LM
 SYSTEM OUTPUT: 610LM
 SYSTEM POWER: 8W
 BEAM: 40°



Standard Packing Information

CARTON BOX: 570X405X295MM
 PCS/CARTON: 20 PCS
 CARTON G.W.: 16KG



HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30°




KTK1-8587

HKTA-8587



HC8587



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
 SURFACE FINISH: MW RA L9016
 IP: 20
 OVERALL DIMENSION: 123X83MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
 DRIVER BRAND: HEP
 INPUT: 110-240V AC 50HZ
 CCT: 3000K
 CRI: >80
 LED OUTPUT: 680LM
 SYSTEM OUTPUT: 550LM
 LED POWER: 6W
 SYSTEM POWER: 7.5W
 BEAM: 30°



Standard Packing Information

CARTON BOX: 485X355X280MM
 PCS/CARTON: 24 PCS
 CARTON G.W.: 11.8KG



KTK1-8591

HKTA-8591



HC-8591

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	30°
----------	------------	-----	----------------	------	-----



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 87X58MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: HEP
INPUT: 110-240V AC 50HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



Standard Packing Information

CARTON BOX: 485X355X280MM
PCS/CARTON: 24 PCS
CARTON G.W.: 11.5KG



HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30°




KTK1-8592

HKTA-8592



HC-8592



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 60 \times 88 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: HEP
INPUT: 110-240V AC 50HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 6800LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 28°



Standard Packing Information

CARTON BOX: 485X355X280MM
PCS/CARTON: 24 PCS
CARTON G.W.: 12.2KG



MHT8575

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☒ Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

12° 22° 36°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø104X50MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: OSRAM
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 4100LM
SYSTEM OUTPUT: 3400LM
LED POWER: 41W
SYSTEM POWER: 47W
BEAM: 12°



MHT8575-47W-3000K-12°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 535X285X455MM
PCS/CARTON: 6PCS
CARTON G.W.: 12.1KG

TRACK LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15° 24°



MHT8583

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 146 \times 100 \times 150 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 4000LM
SYSTEM OUTPUT: 3230LM
LED POWER: 38W
SYSTEM POWER: 40W
BEAM: 24°



MHT8583-40W-3000K-24°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 495X455X440MM
PCS/CARTON: 8 PCS
CARTON G.W.: 13.2KG



MHT8557

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

17° 24° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 1400LM
SYSTEM OUTPUT: 1100LM
LED POWER: 12W
SYSTEM POWER: 16W
BEAM: 24°



MHT8557-16W-3000K-24°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 475X445X315MM
PCS/CARTON: 12 PCS
CARTON G.W.: 9.5KG

TRACK LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15°



MHT8594

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: Ø86X200MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1800LM
SYSTEM OUTPUT: 1500LM
LED POWER: 18W
SYSTEM POWER: 20W
BEAM: 15°



MHT9594-20W-3000K-15°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 390X315X380MM
PCS/CARTON: 12 PCS
CARTON G.W.: 14KG

TRACK LIGHT



CE RoHS



MHT8595

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 80X200MM




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1800LM
SYSTEM OUTPUT: 1500LM
LED POWER: 18W
SYSTEM POWER: 20W
BEAM: 35°



MHT8595-20W-3000K-35°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 390X315X380MM
PCS/CARTON: 12PCS
CARTON G.W.: 11.5KG

TRACK LIGHT



CE RoHS

HIGH CRI >80
>90

CCT 3000K
4000K

BEAM 38°




MHT8596A

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20

OVERALL DIMENSION: $\Phi 76 \times 185 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: LUMENS

INPUT: 220-240V AC 50/60HZ

CCT: 3000K


CRI: >80

LED OUTPUT: 1800LM


SYSTEM OUTPUT: 1500LM

SYSTEM POWER: 20W

BEAM: 38°



MHT8596A-20W-3000K-38°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 390X295X340MM

PCS/CARTON: 12 PCS

CARTON G.W.: 11KG

TRACK LIGHT



MHT8596B



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

40°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø76X200MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
INPUT: 220-240V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 2800LM
SYSTEM OUTPUT: 2200LM
SYSTEM POWER: 30W
BEAM: 40°



MHT8596B-30W-3000K-40°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 390X315X380MM
PCS/CARTON: 12PCS
CARTON G.W.: 11KG

TRACK LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	40°



MHT8597

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: Ø86X200MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENS
INPUT: 220-240V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 4200LM
SYSTEM OUTPUT: 3300LM
SYSTEM POWER: 40W
BEAM: 40 °



MHT8597-40W-3000K-40°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 390X315X380MM
PCS/CARTON: 12 PCS
CARTON G.W.: 14KG

TRACK LIGHT



CE RoHS

HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15°




KTK8801 (2 WIRE)

HKTA8801 (3 WIRE)

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: Ø86X200MM




Standard Optical & Electrical Characteristics

LED BRAND: EVERCORE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 3310LM
SYSTEM OUTPUT: 2650LM
LED POWER: 28W
SYSTEM POWER: 30W
BEAM: 15 °



HKTA8801-30W-3000K-15°



Photometric files for other CCT & beam are available




Standard Packing Information


CARTON BOX: 390X315X380MM
PCS/CARTON: 12 PCS
CARTON G.W.: 14KG



10%
OF TOTAL
TAPE
ARCHIVE



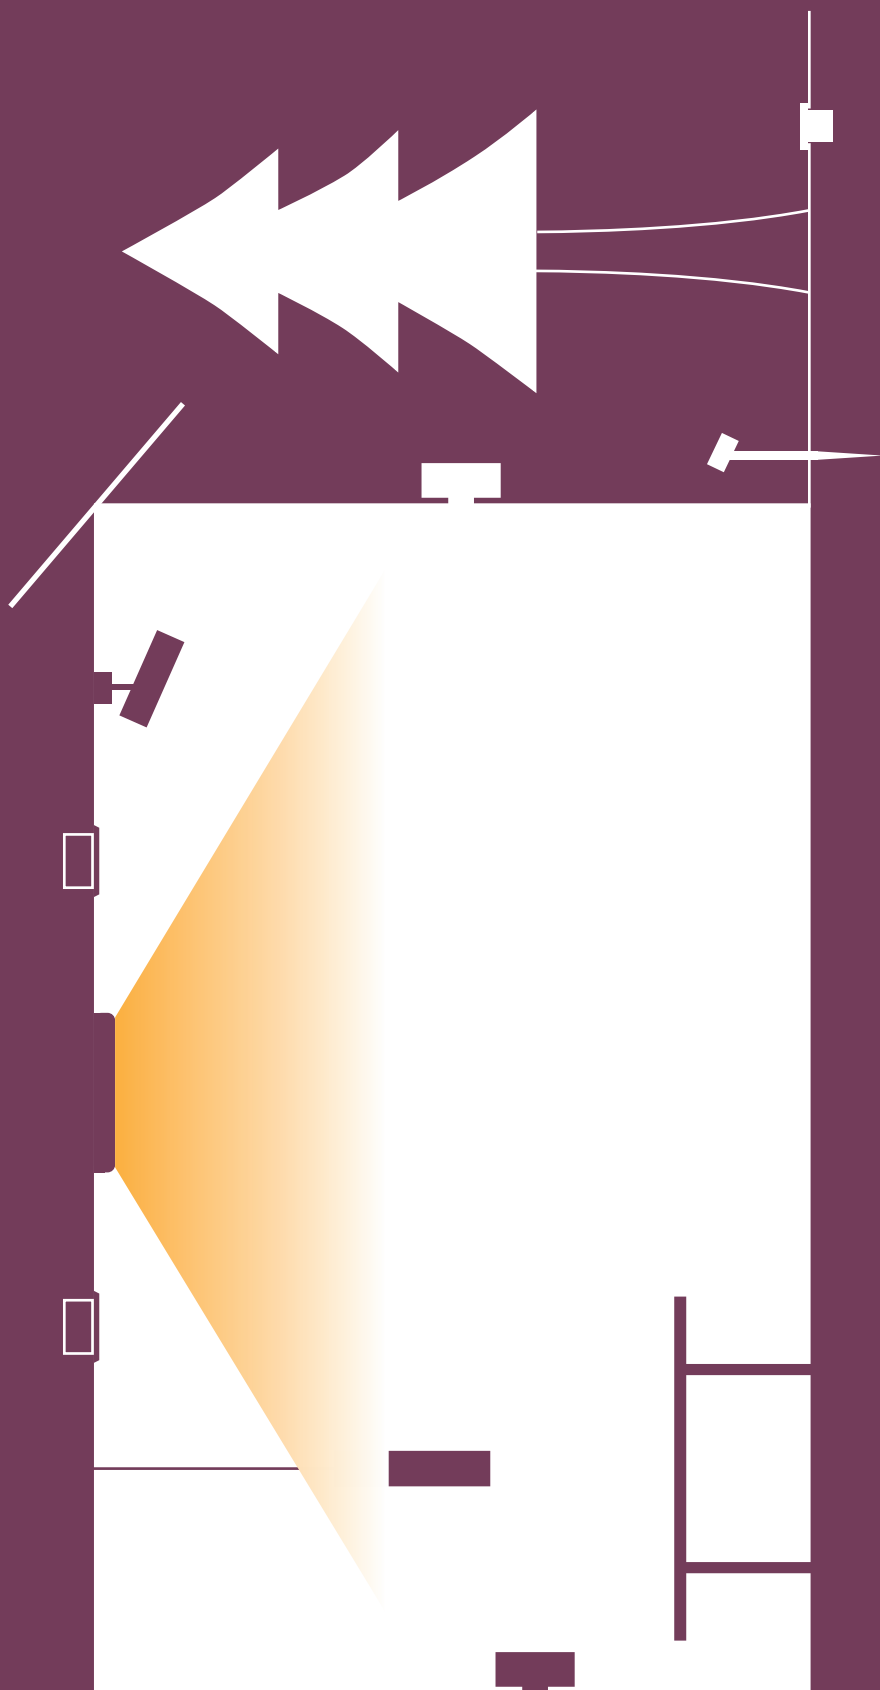

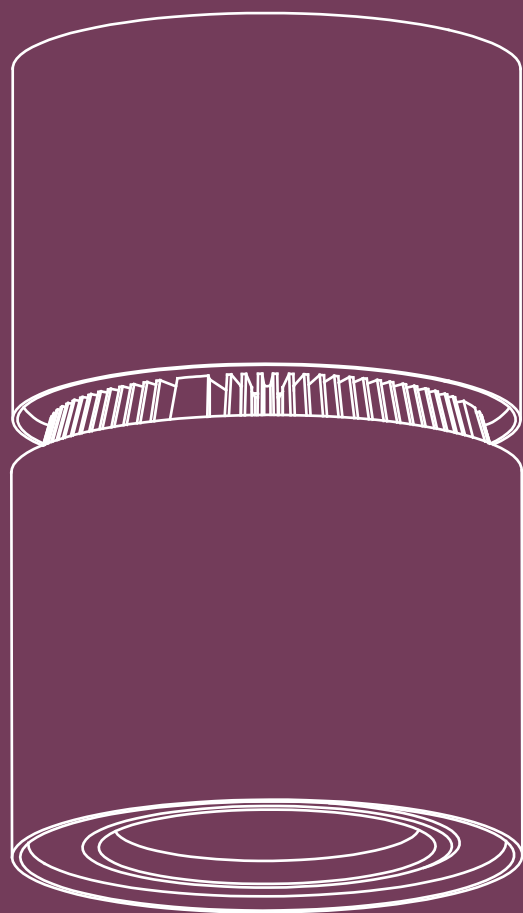

CEILING LIGHT

CEILING LIGHT



CE RoHS

HIGH
CRI >80
>90

CCT 3000K
4000K

BEAM 100°




XD2055A

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 65

OVERALL DIMENSION: 330X90MM



Standard Optical & Electrical Characteristics

LED BRAND: NICHIA

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: >80


LED OUTPUT: 2600LM

SYSTEM OUTPUT: 2100LM


LED POWER: 30W

SYSTEM POWER: 32W

BEAM: 100°



XD2055A-32W-3000K-100°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 575X380X440MM

PCS/CARTON: 8 PCS

CARTON G.W.: 14.5KG

CEILING LIGHT

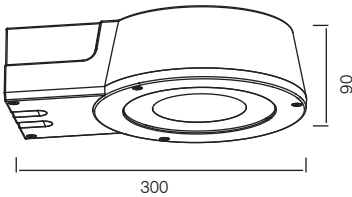

XD2055B

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 65
OVERALL DIMENSION: 300X90MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 3000LM
SYSTEM OUTPUT: 2400LM
LED POWER: 30W
SYSTEM POWER: 32W
BEAM: 25°



XD2055B-32W-3000K-25°

420° 1,848, 27°	25°	1,420°
400° 897°	42° 45°	
120° 5, 162, 11°	30°	2, 89°
113° 174°	25°	86, 86°
40° 88, 72, 50°	15°	4, 27°
50° 5, 775, 31°	10°	130, 28°
20° 26, 45, 51°	5°	5, 71°
20° 5, 408, 31°	0°	172, 72°
10° 80, 25, 92°	0°	7, 124°
10° 8, 279, 31°	0°	217, 15°

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 370X280X105MM
PCS/CARTON: 8 PCS
CARTON G.W.: 17KG

CEILING LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	18° 30°



XD2022A

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø125X127MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 2200LM
SYSTEM OUTPUT: 1800LM
LED POWER: 23W
SYSTEM POWER: 26W
BEAM: 18°



XD2022A-26W-3000K-18°

E(k)	h(m)	Ø(cm)
2926	17.95	31.59
732	2	63.18
325	3	94.77
183	4	126.37
117	5	157.96


Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 480X355X350MM
PCS/CARTON: 12PCS
CARTON G.W.: 18KG

CEILING LIGHT



XD2022-L50



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

18 30




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: Φ 125XH500MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 2200LM
SYSTEM OUTPUT: 1800LM
LED POWER: 23W
SYSTEM POWER: 26W
BEAM: 18°



XD2022-L50-26W-3000K-18°

E(ft)	h(m)	Ø(cm)
2229	16.74	29.43
557	2	58.86
247	3	88.29
193	4	117.72
89	6	147.15

Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 515X270X630MM
PCS/CARTON: 8PCS
CARTON G.W.: 13.4KG


CEILING LIGHT




CE RoHS



XD2036-1



XD2036-2



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 90X90X100MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
BEAM: 30°



XD2036-1 -7.5W-3000K-30°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
XD2036-1	6W	7.5W	680LM	550LM	435X345X225MM	12	12.4KG
XD2036-2	2X6W	2X7.5W	1360LM	1100LM	295X270X440MM	8	14.5KG

CEILING LIGHT



CE RoHS

HIGH CRI
>80
>90

CCT
3000K
4000K

BEAM
30° 60°

XD2019




Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20

OVERALL DIMENSION: 100X100X150MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: >80


LED OUTPUT: 680LM

SYSTEM OUTPUT: 550LM


LED POWER: 6W

SYSTEM POWER: 7.5W

BEAM: 30°



XD2019-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 670X275X200MM


PCS/CARTON: 10 PCS

CARTON G.W.: 10.3KG

CEILING LIGHT



CE RoHS



XD2020



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

30° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø86X150MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 680LM
SYSTEM OUTPUT: 550LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 30°



XD2020-7.5W-3000K-30°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 595X245X200MM
PCS/CARTON: 10 PCS
CARTON G.W.: 9KG

CEILING LIGHT



CE RoHS

HIGH
CRI >80
>90

CCT 3000K
4000K

BEAM 110°




XD2017

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20

OVERALL DIMENSION: 300X300X45MM



Standard Optical & Electrical Characteristics

LED BRAND: LUMENMAX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: >80


LED OUTPUT: 1600LM

LED POWER: 22W


SYSTEM OUTPUT: 1300LM

SYSTEM POWER: 24W

BEAM: 110°



XD2017-24W-3000K-110°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 350X350X400MM

PCS/CARTON: 4 PCS

CARTON G.W.: 10KG

CEILING LIGHT



XD2018

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

100°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: 500X200X45MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENMAX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1500LM
SYSTEM OUTPUT: 1200LM
SYSTEM POWER: 18W
BEAM: 100°



XD2018-18W-3000K-100°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 640X250X235MM
PCS/CARTON: 2 PCS
CARTON G.W.: 5.5KG

CEILING LIGHT



CE RoHS


HIGH CRI	>80	>95
CCT	3000K	4000K
BEAM	15°	25°



XD2048

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 146 \times \Phi 112 \times 125 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 4000LM
SYSTEM OUTPUT: 3200LM
LED POWER: 38W
SYSTEM POWER: 40W
BEAM: 25°



XD2048-40W-3000K-25°




Photometric Files For Other Cct & Beam Are Available



Standard Packing Information

CARTON BOX: 435X435X410MM
PCS/CARTON: 12 PCS
CARTON G.W.: 15.7KG



XD2054



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	25°
-------------	------------	-----	----------------	------	-----



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Φ143XH183MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 4700LM
SYSTEM OUTPUT: 3800LM
LED POWER: 46W
SYSTEM POWER: 50W
BEAM: 25°




Standard Packing Information

CARTON BOX: 375X375X455MM
PCS/CARTON: 8PCS
CARTON G.W.: 16KG


CEILING LIGHT




CE RoHS



XD2059



XD2060



XD2061

Trim Finish Optional:

☐ Matte White RAL 9016

☒ Matte Grey RAL 9006

☐ Matte Black RAL 9005



>80
>90



3000K
4000K



110°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: NATIONSTAR


DRIVER BRAND: AREEK

INPUT: 110-230V AC 50 HZ


CCT: 3000K

CRI: > 80

BEAM: 110°



XD2059-22W-3000K-110°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
XD2059	21W	22W	1800LM	1500LM	430x430x330mm	6	7.5KG
XD2060	31W	34W	2800LM	2300LM	530x530x220mm	4	7KG
XD2061	38W	40W	4000LM	3200LM	630x630x115mm	2	5KG

CEILING LIGHT



CE RoHS



- XD2044** $\Phi 95 \times 94 \text{mm}$
- XD2045** $\Phi 124 \times 108 \text{mm}$
- XD2046** $\Phi 140 \times 118 \text{mm}$
- XD2047** $\Phi 205 \times 132 \text{mm}$

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☒ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM


60° 80°




Standard Mechanical Parameters
MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20



Standard Optical & Electrical Characteristics
LED BRAND: NATIONSTAR
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 80°



XD2047-45W-3000K-80°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
XD2044	6W	7W	560LM	450LM	315X215X420mm	24	20KG
XD2045	9W	11W	940LM	750LM	275X275X350mm	12	16KG
XD2046	20W	22W	2000LM	1600LM	305X305X270mm	8	15KG
XD2047	43W	45W	3500LM	2800LM	435X220X440mm	6	14KG

CEILING LIGHT



CE RoHS



XD2078 $\Phi 124 \times 45 \text{mm}$

XD2079 $\Phi 182 \times 45 \text{mm}$

XD2080 $\Phi 222 \times 46 \text{mm}$

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

115°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: EDISON

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60Hz


CCT: 3000K

BEAM: 115°

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
XD2078	6W	8W	410LM	330LM	405X275X235MM	24	9.5KG
XD2079	9W	12W	700LM	550LM	485X395X235MM	24	19KG
XD2080	12W	16W	1100LM	850LM	475X475X240MM	16	17.8KG



XD2065



Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20

OVERALL DIMENSION: $\Phi 66 \times 158 \text{MM}$

LAMP TYPE: MR16 STANDARD, GU10 OPTIONAL



LED MR16



Standard Packing Information

CARTON BOX: 435X435X410MM

PCS/CARTON: 12 PCS

CARTON G.W.: 6KG




LED GU10

XD2066



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☒ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20

OVERALL DIMENSION: Ø60X100MM

LAMP TYPE: MR16 STANDARD, GU10 OPTIONAL



LED MR16



Standard Packing Information

CARTON BOX: 435X435X410MM

PCS/CARTON: 12 PCS

CARTON G.W.: 4KG




LED GU10

CEILING LIGHT



CE RoHS



XD2096 $\Phi 417 \times 82 \text{mm}$

XD2097 $\Phi 368 \times 82 \text{mm}$



Trim Finish Optional:

- Golden
- Red
- Black

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

115°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: PUSISAT
INPUT: 220-240V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 115°



XD2096-30W-3000K-115°




Photometric files for other CCT & beam are available

ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
XD2096	30W	2600LM	1600LM	470X465X420mm	4	6KG
XD2097	25W	1300LM	1000LM	420X415X420mm	4	4.6KG


CEILING LIGHT



XD2077-1



XD2077-2



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: EVEACORE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 60°



XD2077-16W-3000K-60°




Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
XD2085	14W	16W	1300LM	1050LM	435X315X195MM	12	9.2KG
XD2086	2X14W	2X16W	2600LM	2100LM	435X425X195MM	8	10KG

CEILING LIGHT



CE RoHS



XD2081

As Optional

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI

>80

>90

CCT

3000K

4000K

BEAM

110°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 356 \times 109 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: EDISON
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 2400LM
SYSTEM OUTPUT: 1920LM
LED POWER: 26W
SYSTEM POWER: 30W
BEAM: 110°



XD2081-30W-3000K-110°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 395X395X540MM
PCS/CARTON: 4 PCS
CARTON G.W.: 6.1KG


CEILING LIGHT



CE RoHS



XD2106



XD2107



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☒ Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K


BEAM

50°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016



XD2107-40W-3000K-50°




Photometric files for other CCT & beam are available




Standard Optical & Electrical Characteristics

LED BRAND: EVERCORE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
BEAM: 50°

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
XD2016	24W	26W	2350LM	1880LM	435X295X435MM	18	15.4KG
XD2017	36W	40W	4650LM	3720LM	525X355X355MM	12	14.6KG

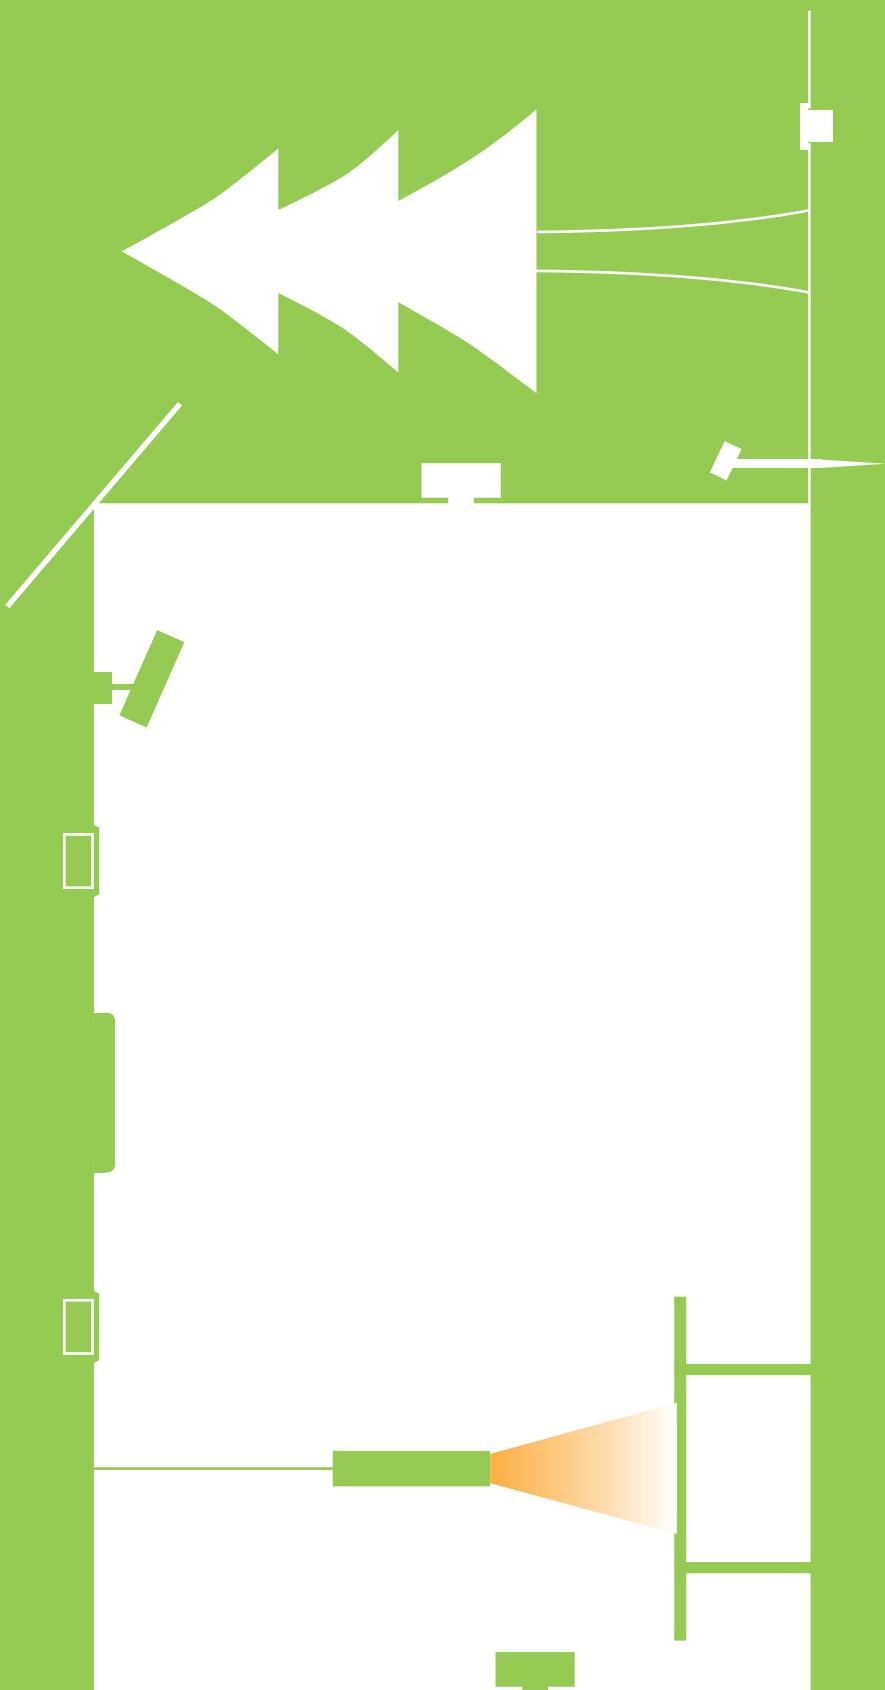

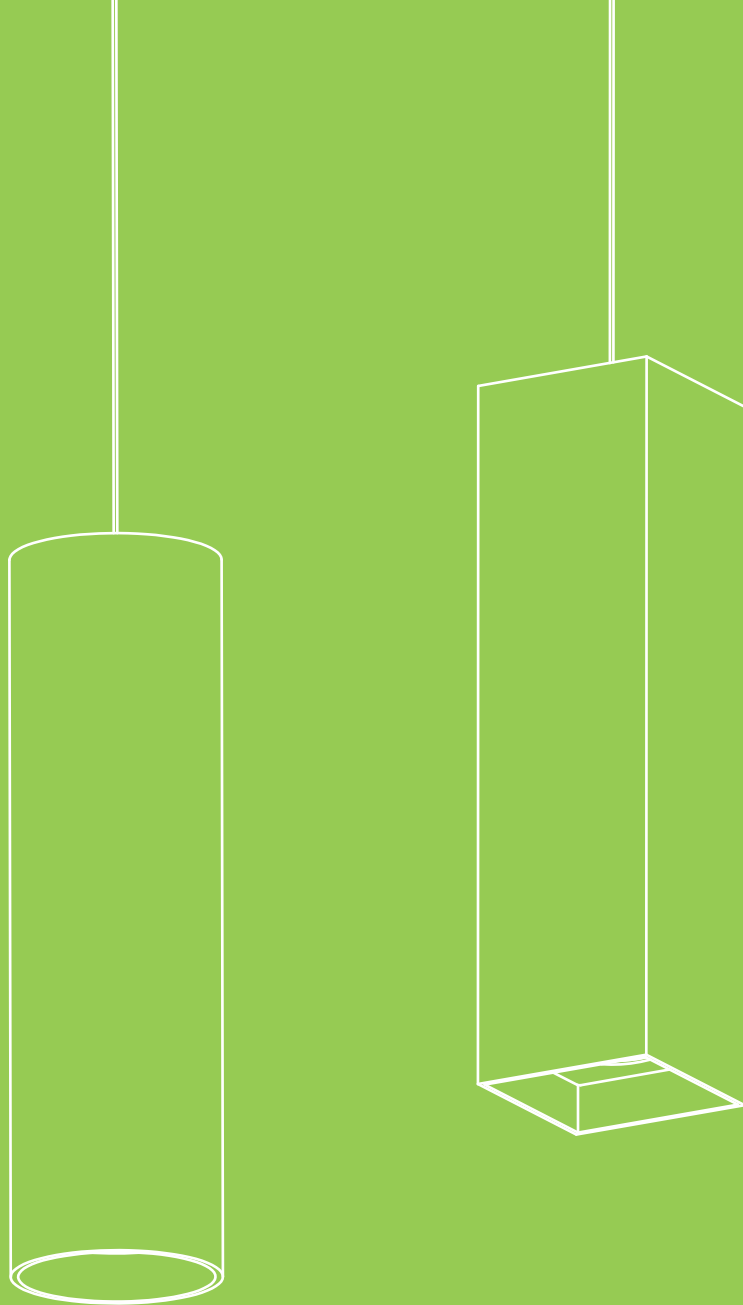

PENDANT LIGHT

PENDANT LIGHT





CE RoHS

HIGH CRI >80
>90

CCT 3000K
4000K

BEAM 110°

KF1015

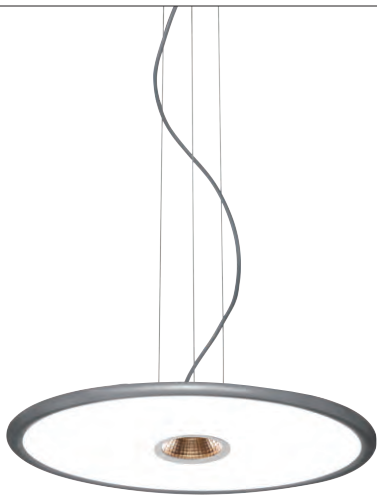

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: Ø360X60MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX+EVERLIGHT
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 3110LM
SYSTEM OUTPUT: 2300LM
LED POWER: 15+19W
SYSTEM POWER: 40W
BEAM: 110°



KF1015-40W-3000K-110°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 640X420X425MM
PCS/CARTON: 4 PCS
CARTON G.W.: 11.6KG

PENDANT LIGHT

KF1015A



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

110°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 360 \times 60 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1600LM
SYSTEM OUTPUT: 1300LM
LED POWER: 19W
SYSTEM POWER: 20W
BEAM: 110°



KF1015A-20W-3000K-110°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 640X420X425MM
PCS/CARTON: 4 PCS
CARTON G.W.: 10.5KG

PENDANT LIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	110°



KF1014

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: 1150X200X45MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENMAX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 2800LM
SYSTEM OUTPUT: 2200LM
LED POWER: 30W
SYSTEM POWER: 35W
BEAM: 110°



KF1014-35W-3000K-110°



Photometric Files For Other Cct & Beam Are Available




Standard Packing Information

CARTON BOX: 1165X320X230MM
PCS/CARTON: 4 PCS
CARTON G.W.: 17.3KG

PENDANT LIGHT



CE RoHS



- KF1019 Φ355X92
- KF1020 Φ500X92
- KF1021 Φ750X104
- KF1022 Φ1000X104

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM


100°




Standard Mechanical Parameters
MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20



Standard Optical & Electrical Characteristics
LED BRAND: EDISON
DRIVER BRAND: AREEK
CCT: 3000K
CRI: > 80
BEAM: 100°



KF1019-20W-3000K-100°



Photometric files for other CCT & beam are available

ITEM NO.	INPUT	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
KF1019	110-230V AC 50HZ	18W	20W	1750LM	1400LM	410x410x110mm	1	3KG
KF1020	220-230V AC 50HZ	28W	30W	2600LM	2100LM	560x560x110mm	1	4KG
KF1021	220-230V AC 50HZ	48W	50W	4300LM	3500LM	810x810x110mm	1	5KG
KF1022	220-230V AC 50HZ	96W	100W	8700LM	7000LM	1060x1060x110mm	1	6KG

PENDANT LIGHT



CE RoHS

SL362A $\Phi 86 \times 200 \text{mm}$

SL362B $\Phi 86 \times 250 \text{mm}$

SL362C $\Phi 86 \times 350 \text{mm}$



Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005

HIGH
CRI

>80

>90

CCT

3000K

4000K

BEAM

16° 25° 30° 38°



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RA L9016

IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN


DRIVER BRAND: AREEK

INPUT: 110-230V AC


CCT: 3000K

CRI: >80

BEAM: 25°



SL362B-28W-3000K-25°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
SL362A	18W	20W	2000LM	1600LM	275X310X275mm	8	5.8KG
SL362B	25W	28W	2800LM	2240LM	275X280X275mm	6	6.3KG
SL362C	38W	42W	4200LM	3360LM	275X380X275mm	6	7.8KG

PENDANT LIGHT




CE RoHS

SL363A 80X80X200mm

SL363B 80X80X250mm

SL363C 80X80X350mm



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

16° 25° 30° 38°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN
DRIVER BRAND: AREEK
INPUT: 110-230V AC
CCT: 3000K
CRI: >80
BEAM: 25°

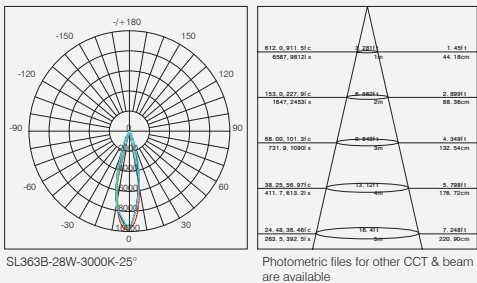

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
SL363A	18W	20W	2000LM	1600LM	275X310X275mm	8	5.6KG
SL363B	25W	28W	2800LM	2240LM	275X280X275mm	6	6KG
SL363C	38W	40W	4200LM	3360LM	275X380X275mm	6	7.5KG


PENDANT LIGHT



CE RoHS

HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	115°

SL2080



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005





Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: Φ222X46MM



Standard Optical & Electrical Characteristics

LED BRAND: EDISON
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1000LM
SYSTEM OUTPUT: 850LM
LED POWER: 14W
SYSTEM POWER: 16W
BEAM: 115°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 475X475X380MM
PCS/CARTON: 16 PCS
CARTON G.W.: 19KG

PENDANT LIGHT



- KF1030

Φ417X82mm
- KF1031

Φ368X82mm



Trim Finish Optional:

- Golden
- Red
- Black

HIGH CRI

>80

>90

CCT

3000K

4000K

BEAM

115°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: PUSISAT
INPUT: 220-240V AC 50/60Hz
CCT: 3000K
CRI: >80
BEAM: 115°

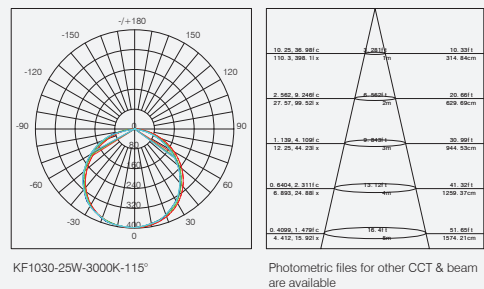

ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
KF1030	30W	2600LM	1600LM	470X465X420mm	4	6.5KG
KF1031	25W	1300LM	1000LM	420X415X420mm	4	5.2KG

PENDANT LIGHT



KF1032A



 **As Optional**

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

 **HIGH CRI**

 **>80**

 **>90**

 **CCT**

 **3000K**

 **4000K**

 **BEAM**

 **110°**




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: $\Phi 356 \times 109 \text{MM}$




Standard Optical & Electrical Characteristics

LED BRAND: EDISON
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 2400LM
SYSTEM OUTPUT: 1920LM
LED POWER: 26W
SYSTEM POWER: 30W
BEAM: 110°



KF1032A-30W-3000K-110°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 395X395X540MM
PCS/CARTON: 4 PCS
CARTON G.W.: 6.5KG



PENDANT LIGHT



CE RoHS

HIGH CRI	>80
CCT	3000K 4000K
BEAM	130°

KF1016

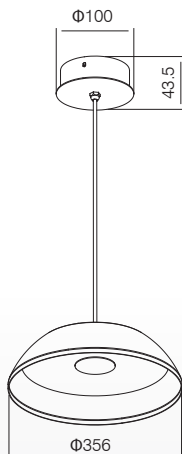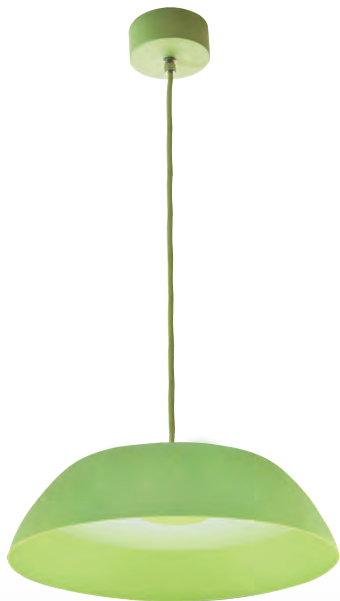

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005





Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20
OVERALL DIMENSION: $\Phi 305 \times 305 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1820LM
SYSTEM OUTPUT: 1460LM
LED POWER: 21W
SYSTEM POWER: 25W
BEAM: 130°





Standard Packing Information

CARTON BOX: 325X335X390MM
PCS/CARTON: 4 PCS
CARTON G.W.: 7.2KG

PENDANT LIGHT



KF1018

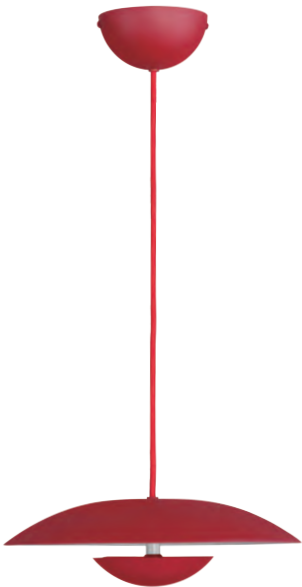

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

100°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION: Ø310x310MM




Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1000LM
SYSTEM OUTPUT: 800LM
LED POWER: 12W
SYSTEM POWER: 16W
BEAM: 100°



KF1018-16W-3000K-100°



Photometric files for other CCT & beam are available



Standard Packing Information


CARTON BOX: 645X645X480MM
PCS/CARTON: 12 PCS
CARTON G.W.: 13.4KG

PENDANT LIGHT



CE RoHS

HIGH CRI	>80
CCT	3000K 4000K
BEAM	76°

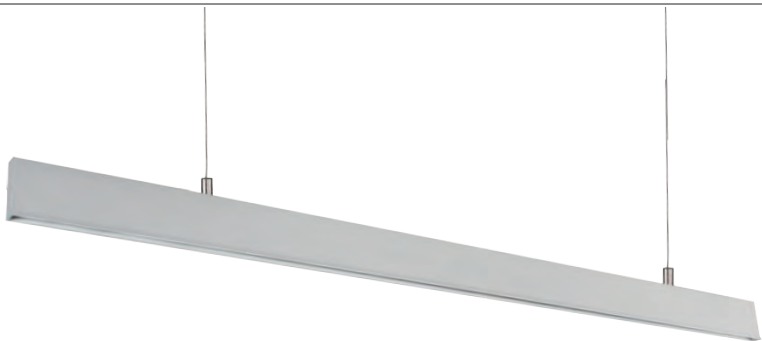



KF1027 1040XH56MM

KF1027A 1040XH75MM



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☒ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

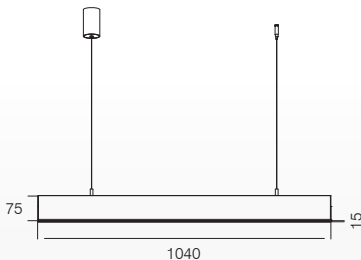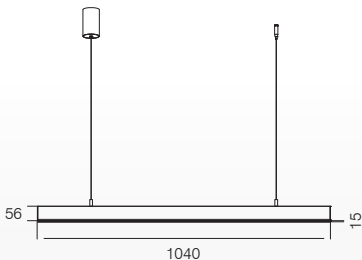


Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 1180LM
SYSTEM OUTPUT: 950LM
LED POWER: 33W
SYSTEM POWER: 37W
BEAM: 76°



KF1027-37W-3000K-76°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 1115X355X205MM
PCS/CARTON: 12 PCS
CARTON G.W.: 13KG

PENDANT LIGHT



KF1013

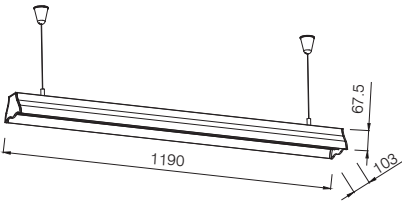

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

100°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 20
OVERALL DIMENSION:1190x103XH67.5MM




Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 2870LM
SYSTEM OUTPUT: 2300LM
LED POWER: 33W
SYSTEM POWER: 36W
BEAM: 112°



KF1013-16W-3000K-100°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 1220X108X74MM
PCS/CARTON: 8 PCS
CARTON G.W.: 22.5KG



PENDANT LIGHT




CE RoHS



KF1012A

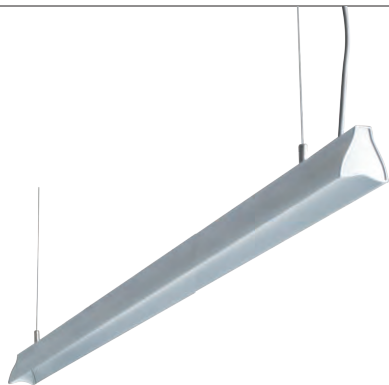

KF1012B




Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016
IP: 20



KF1012A-40W-3000K-112°



Photometric files for other CCT & beam are available



Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 3110LM
SYSTEM OUTPUT: 2500LM
BEAM: 112°

ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
KF1012A	18W	1500LM	1200LM	1220X240X200MM	12	22KG
KF1012B	27W	2120LM	1700LM	1770X240X200MM	12	33KG

PENDANT LIGHT



HIGH CRI

>80
>90

BEAM

10°

CCT


3000K
4000K

SL367



Trim Finish Optional:

- white
- blue
- green
- yellow
- pink




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016 OR Electroplate
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CREE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 275LM
SYSTEM OUTPUT: 220LM
SYSTEM POWER: 3W
BEAM: 10°



SL367-3W-3000K-10°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 785X450X430MM
PCS/CARTON: 50 PCS
CARTON G.W.: 20KG

PENDANT LIGHT



CE RoHS



>80
>90




3000K
4000K



40°

SL368



Trim Finish Optional:

- white
- blue
- green
- yellow
- pink




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016 OR Electroplate
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CREE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 175LM
SYSTEM OUTPUT: 140LM
SYSTEM POWER: 3W
BEAM: 40°



SL368-3W-3000K-40°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 785X450X430MM
PCS/CARTON: 50 PCS
CARTON G.W.: 20KG

PENDANT LIGHT



HIGH CRI

>80
>90

BEAM

10°

CCT


3000K
4000K

SL369



Trim Finish Optional:

- ☐ white
- ☐ blue
- ☐ green
- ☐ yellow
- ☐ pink




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RA L9016 OR Electroplate
IP: 20




Standard Optical & Electrical Characteristics

LED BRAND: CREE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: >80
LED OUTPUT: 275LM
SYSTEM OUTPUT: 220LM
SYSTEM POWER: 3W
BEAM: 10°



SL367-3W-3000K-10°





Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 785X450X430MM
PCS/CARTON: 50 PCS
CARTON G.W.: 20KG

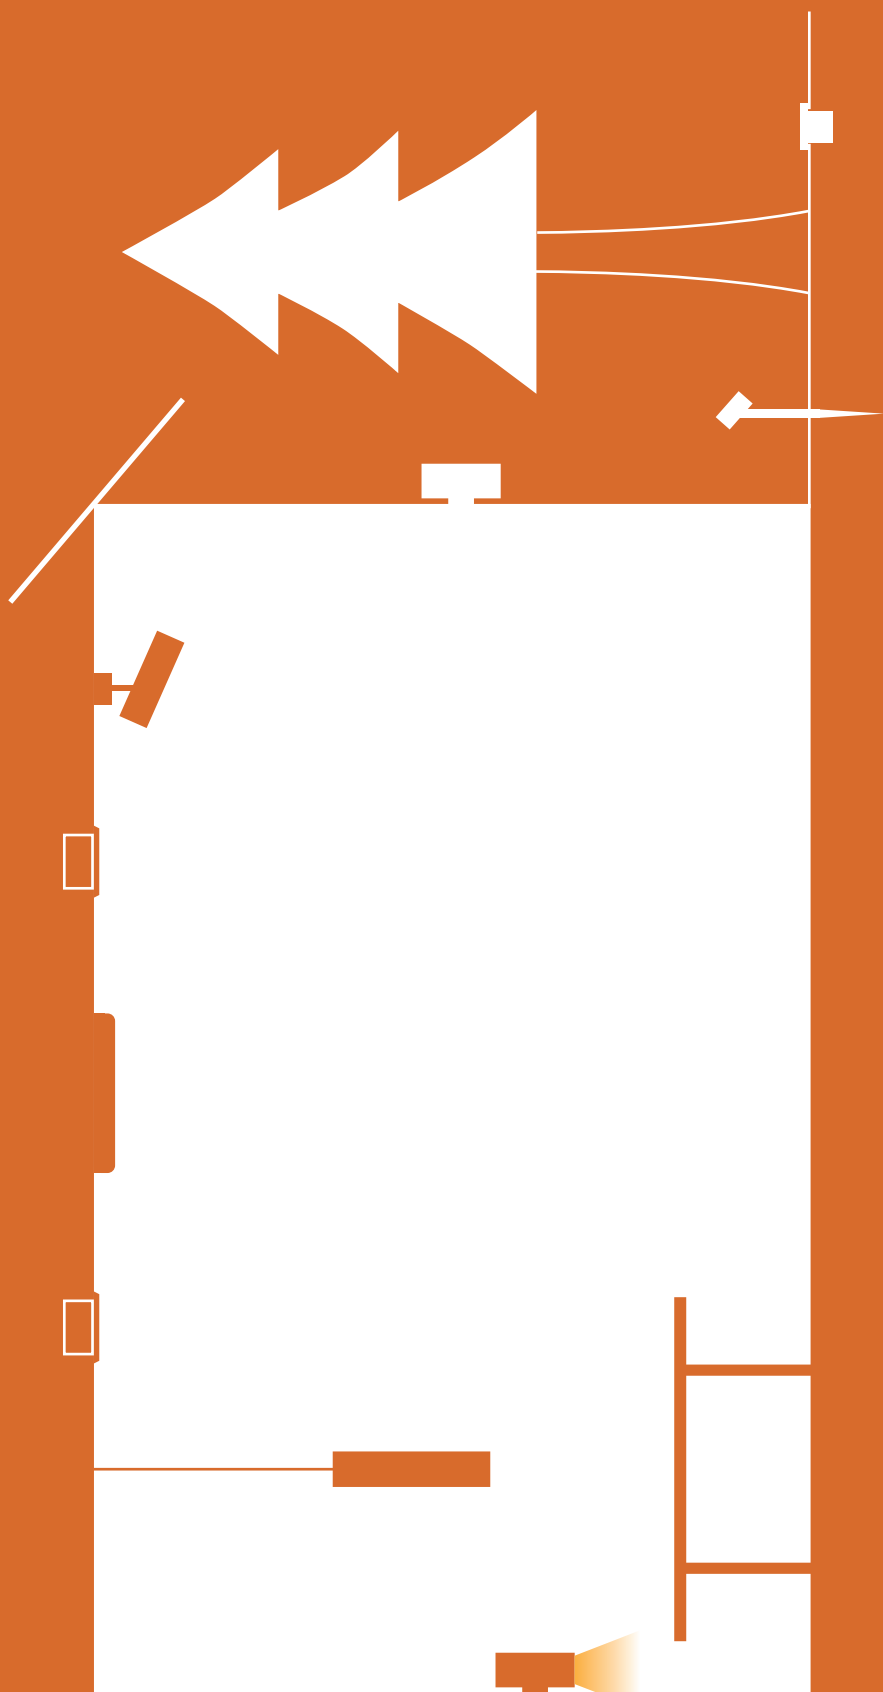

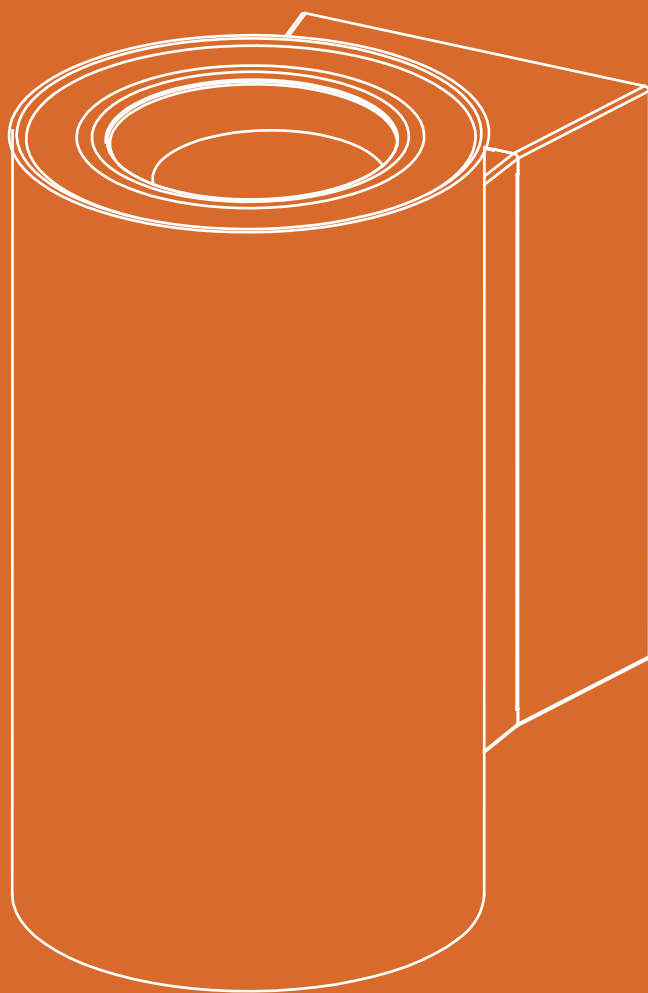

WALL LIGHT

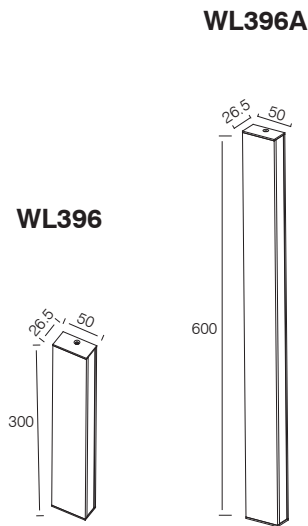

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

110°





Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20



Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
BEAM: 110°



ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
WL396	8W	11W	830LM	660LM	345x295x340mm	20	8.6KG
WL396A	16W	21W	1600LM	1300LM	345x295x340mm	10	8.6KG

WALL LIGHT



CE RoHS

HIGH CRI >80
>90

CCT 3000K
4000K

BEAM 65°




WL397A

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20

OVERALL DIMENSION: 250X118X33MM



Standard Optical & Electrical Characteristics

LED BRAND: LUMENMAX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: > 80


LED OUTPUT: 380LM

SYSTEM OUTPUT: 300LM


LED POWER: 7W

SYSTEM POWER: 9W

BEAM: 65°



WL397A-9W-3000K-65°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 300X290X345MM

PCS/CARTON: 20PCS

CARTON G.W.: 8.3KG

WALL LIGHT



WL398A

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

130°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: 280X150.5XH45.5MM




Standard Optical & Electrical Characteristics

LED BRAND: LUMENMAX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 440LM
SYSTEM OUTPUT: 350LM
LED POWER: 12x0.5W
SYSTEM POWER: 8W
BEAM: 130°



WL398A-8W-3000K-130°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 630X375X330MM
PCS/CARTON: 16PCS
CARTON G.W.: 19.6KG

WALL LIGHT



CE RoHS

HIGH CRI
>80
>90

CCT
3000K
4000K

BEAM
100°




WL536

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 54

OVERALL DIMENSION: 120X120XH70MM



Standard Optical & Electrical Characteristics

LED BRAND: HONGLI

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: > 80


LED OUTPUT: 225LM

SYSTEM OUTPUT: 180LM


LED POWER: 6W

SYSTEM POWER: 8W

BEAM: 100°



WL536-8W-3000K-100°



Photometric files for other CCT & beam are available





Standard Packing Information

CARTON BOX: 395X395X170MM

PCS/CARTON: 18PCS

CARTON G.W.: 13.6KG



WL537

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

100°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 54
OVERALL DIMENSION: 120X120XH70MM




Standard Optical & Electrical Characteristics

LED BRAND: HONGLI
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 200LM
SYSTEM OUTPUT: 160LM
LED POWER: 6W
SYSTEM POWER: 8W
BEAM: 100°



WL537-8W-3000K-100°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 395X395X170MM
PCS/CARTON: 12PCS
CARTON G.W.: 12.8KG

WALL LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	100°



WL538

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 54
OVERALL DIMENSION: 120X120XH70MM




Standard Optical & Electrical Characteristics

LED BRAND: HONGLI
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 225LM
SYSTEM OUTPUT: 180LM
LED POWER: 2x3WW
SYSTEM POWER: 8W
BEAM: 100°



WL538-8W-3000K-100°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 357X300X335MM
PCS/CARTON: 18PCS
CARTON G.W.: 13.4KG

WALL LIGHT



WL539



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

25° 40° 60°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 54
OVERALL DIMENSION: Ø90XH200MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 2000LM
SYSTEM OUTPUT: 1300LM
LED POWER: 26W
SYSTEM POWER: 28W
BEAM: 25°



WL539- 26W-3000K-25°




Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 415X300X435MM
PCS/CARTON: 16PCS
CARTON G.W.: 36KG

WALL LIGHT



WL541



Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: 60X87XH146MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 420LM
SYSTEM OUTPUT: 330LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 100°



WL541-7.5W-3000K-100°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 520X175X500MM
PCS/CARTON: 25PCS
CARTON G.W.: 16.7KG

WALL LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	100°



WL542

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL 9016
IP: 54
OVERALL DIMENSION: 88X60XH148.5MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 420LM
SYSTEM OUTPUT: 330LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 100°



Standard Packing Information

CARTON BOX: 520X175X500MM
PCS/CARTON: 25PCS
CARTON G.W.: 13.2KGs



WL543



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

100°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: 87XH158.5MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 420LM
SYSTEM OUTPUT: 330LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 100°



WL543-7.5W-3000K-100°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 520X175X500MM
PCS/CARTON: 25PCS
CARTON G.W.: 20.7KG

WALL LIGHT



CE RoHS

HIGH CRI	>80
	>90

CCT	3000K
	4000K

BEAM	25°
------	-----




WL546

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20

OVERALL DIMENSION: $\Phi 165 \times H55 \text{MM}$



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 110-240V AC 50/60HZ

CCT: 3000K

CRI: > 80

LED OUTPUT: 700LM

SYSTEM OUTPUT: 560LM

LED POWER: 6W

SYSTEM POWER: 7.5W

BEAM: 25°




Standard Packing Information

CARTON BOX: 185X530X270MM

PCS/CARTON: 12PCS

CARTON G.W.: 16.6KG



WL544



Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

15° 25°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: 65XH400MM




Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 1000LM
SYSTEM OUTPUT: 800LM
SYSTEM POWER: 15W
BEAM: 25°



WL544-15W-3000K-25°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 445X420X320MM
PCS/CARTON: 24PCS
CARTON G.W.: 10.3KG

WALL LIGHT



CE RoHS

HIGH CRI >80
>90

CCT 3000K
4000K

BEAM 25°




WL547

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 20

OVERALL DIMENSION: 175X66XH84MM



Standard Optical & Electrical Characteristics

LED BRAND: CREE

DRIVER BRAND: AREEK

INPUT: 110-240V AC 50/60HZ

CCT: 3000K

CRI: > 80


LED OUTPUT: 350LM

SYSTEM OUTPUT: 250LM


LED POWER: 4W

SYSTEM POWER: 5W

BEAM: 25°



WL547-5W-3000K-25°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 375X195X400MM

PCS/CARTON: 20PCS

CARTON G.W.: 9.6KG

WALL LIGHT



WL391E

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

100°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 20
OVERALL DIMENSION: 100X100XH116MM




Standard Optical & Electrical Characteristics

LED BRAND: CREE
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 110LM
SYSTEM OUTPUT: 90LM
LED POWER: 4W
SYSTEM POWER: 5W
BEAM: 100°



WL391E-5W-3000K-100°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 335X225X390MM
PCS/CARTON: 18PCS
CARTON G.W.: 13.5KG

WALL LIGHT



CE RoHS

HIGH CRI >80
>90

CCT 3000K
4000K

BEAM 25°




WL545B

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 65

OVERALL DIMENSION: 330X90MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: > 80


LED OUTPUT: 3000LM

SYSTEM OUTPUT: 2400LM


LED POWER: 30W

SYSTEM POWER: 32W

BEAM: 25°



WL545B-32W-3000K-24°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 575X380X440MM

PCS/CARTON: 8PCS

CARTON G.W.: 17KG

WALL LIGHT



WL545A

Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI

>80
>90

CCT

3000K
4000K

BEAM

100°




Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 65
OVERALL DIMENSION: 330XH90MM




Standard Optical & Electrical Characteristics

LED BRAND: NICHIA
DRIVER BRAND: AREEK
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 2600LM
SYSTEM OUTPUT: 2100LM
LED POWER: 30W
SYSTEM POWER: 32W
BEAM: 100°



WL545A-32W-3000K-100°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 575X380X440MM
PCS/CARTON: 8PCS
CARTON G.W.: 14.5KG

WALL LIGHT



CE RoHS

HIGH CRI >80
>90

CCT 3000K
4000K

BEAM 90°




WL548

Trim Finish Optional:

☐ Matte White RAL 9016

☐ Matte Grey RAL 9006

☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 65

OVERALL DIMENSION: 88X60XH149MM



Standard Optical & Electrical Characteristics

LED BRAND: EDISON

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: > 80



LED OUTPUT: 460LM

SYSTEM OUTPUT: 370LM

LED POWER: 6W

SYSTEM POWER: 9W

BEAM: 90°



Photometric files for other CCT & beam are available




Standard Packing Information

CARTON BOX: 248X420X220MM

PCS/CARTON: 12PCS

CARTON G.W.: 9.5KG



WL552

Trim Finish Optional:

- ☐ Matte White RAL 9016
- ☐ Matte Grey RAL 9006
- ☐ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING
SURFACE FINISH: MW RAL9016
IP: 65
OVERALL DIMENSION: 150X82XH91MM



Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX
DRIVER BRAND: HEP
INPUT: 110-230V AC 50/60HZ
CCT: 3000K
CRI: > 80
LED OUTPUT: 460LM
SYSTEM OUTPUT: 370LM
LED POWER: 6W
SYSTEM POWER: 7.5W
BEAM: 90°



Standard Packing Information

CARTON BOX: 248X420X220MM
PCS/CARTON: 12PCS
CARTON G.W.: 8.6KG

WALL LIGHT



CE RoHS


HIGH CRI >80
>90

CCT 3000K
4000K

BEAM 73°



WL572




Trim Finish Optional:

□ Matte White RAL 9016

■ Matte Grey RAL 9006

■ Matte Black RAL 9005



Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING

SURFACE FINISH: MW RAL 9016

IP: 65

OVERALL DIMENSION: 1040X15XH75MM



Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT

DRIVER BRAND: AREEK

INPUT: 110-230V AC 50/60HZ

CCT: 3000K

CRI: >80


LED OUTPUT: 1220LM

SYSTEM OUTPUT: 980LM


LED POWER: 18W

SYSTEM POWER: 20W

BEAM: 73°



WL572-20W-3000K-73°



Photometric files for other CCT & beam are available



Standard Packing Information

CARTON BOX: 1115X355X205MM

PCS/CARTON: 12 PCS


CARTON G.W.: 12.9KG



Accessories


MHT1-100/200/300

Aluminium alloy 4 wire track




MHT1-C/L or MHT1-C/R

Power adaptor




MHT1-I

Small straight connector




MHT1-IL

Big straight connector




MHT1-A

Adjustable connector




MHT1-L/L or MHT1-L/R

L connector




MHT1-T/L or MHT1-T/R

T connector





MHT1-X

X connector




MHT1-N

End cap




MHT-H1

Fixture adaptor

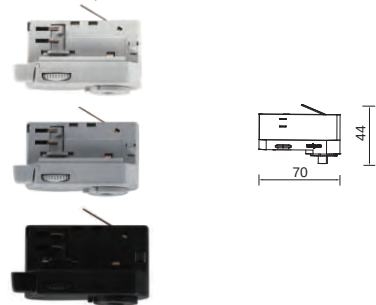


MHT-H3

Fixture adaptor




MHT-H2

Fixture adaptor

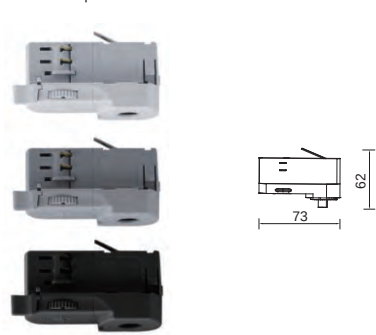


MHT-H12

Fixture adaptor



MHT-H6 Box

Fixture adaptor



MHT-H11 Box

Fixture adaptor



Pendant Light Accessories

MHT-P15/30/50
(1.5M/3M/5M)



MHT1-P2



MHT1-P1



This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTE

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

DIFFERENT OPTIONS FOR PROJECTS REQUEST

CCT	-	BEAM ANGLE	-	TRIM FINISH
	-		-	
2700K		18°		BLACK
3000K		24°		WHITE
4000K		30°		GREY
5000K		40°		
6500K		60°		

☐ NO

☐ DIMMABLE

☐ YES

☐ DIMMABLE

☐ NO

☐ AC

☐ YES

☐ AC

☐  ECG
1-10 V

☐  ECG
switch DIM

☐  ECG
DALI

☐  ECG
TRIAC



DOB(AC) FEATURES

Runs Directly on AC current

Excellent PF (>0.99) and Low THD (<20%)

Thermal Shut down Circuit embedded (150 °C)

Compatible with most TRIAC dimmers on the market

Great Combination of Chip-On-Board and AC Technology

Provides No Strobing, No Flicker as found in most LED AC modules

Warranty

☐

3

 YEARS

☐

5

 YEARS

Wanna get our latest quotation about these products

CONTACT US NOW



KETAI INDUSTRIES LIGHTING CO., LTD.

Tel: +86 757 8560 7707 Email: sales@ketailighting.com

Fax: +86 757 8563 3675 Website: www.ketailighting.com

4 Mashe New Street, Lishui, Nanhai, Foshan, Guangdong,
China 528244