

# CATALOGUE


2016-2017 v2.0



**KETAI**

*we love our lights, we enjoy our life*



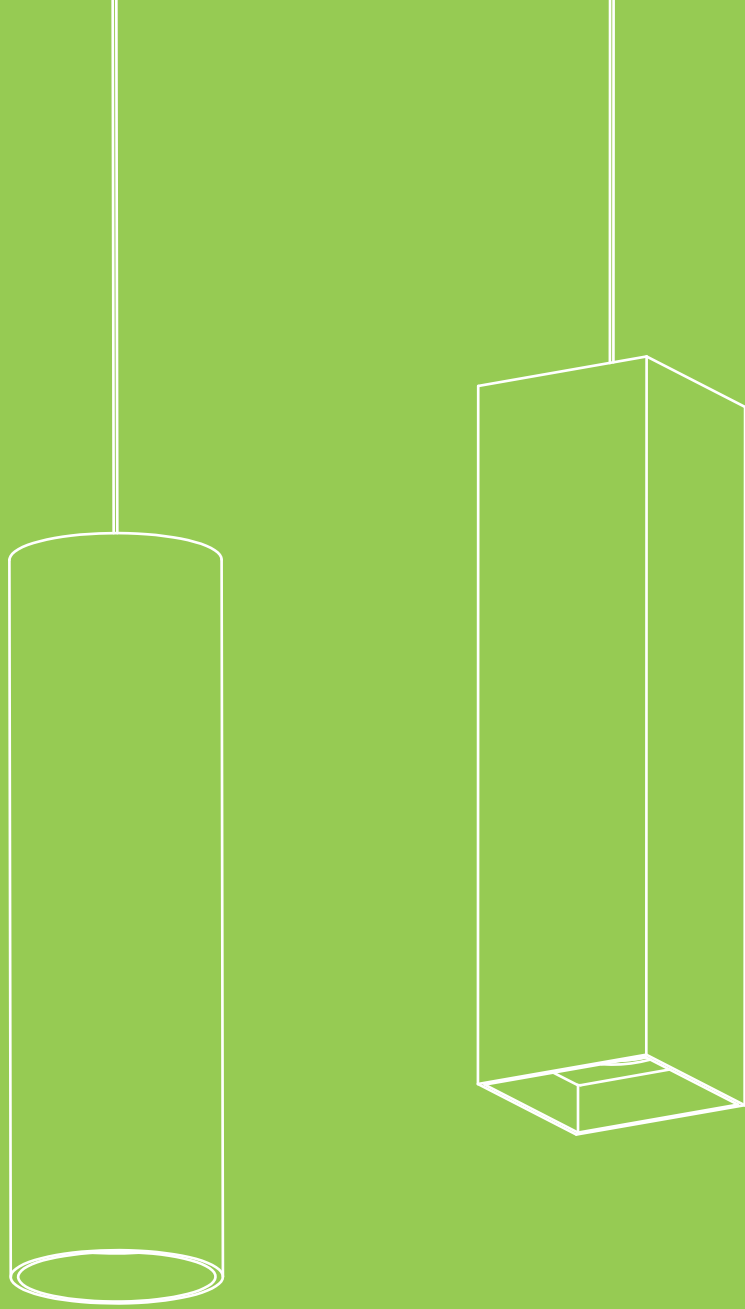


PENDANT LIGHT

# PENDANT LIGHT




HIGH CRI	>80
CCT	3000K 4000K
BEAM	110°

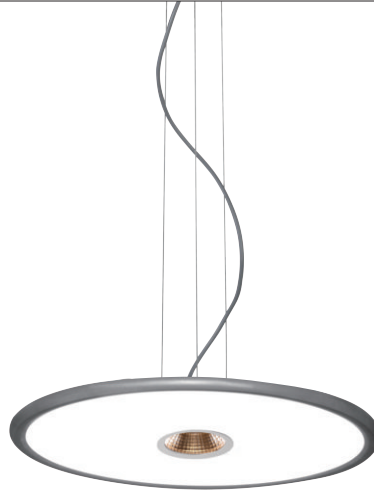

## KF1015

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION: Ø360X60MM




### Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX+EVERLIGHT  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 3110LM  
 SYSTEM OUTPUT: 2300LM  
 LED POWER: 15+19W  
 SYSTEM POWER: 40W  
 BEAM: 110°



KF1015-40W-3000K-110°



Photometric files for other CCT & beam are available





### Standard Packing Information

CARTON BOX: 640X420X425MM  
 PCS/CARTON: 4 PCS  
 CARTON G.W.: 11.6KG

# PENDANT LIGHT



**KF1015A**

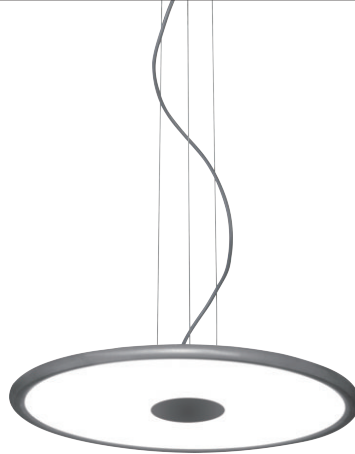

**Trim Finish Optional:**

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	110°
----------	------------	-----	----------------	------	------




**Standard Mechanical Parameters**

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 360 \times 60 \text{MM}$




**Standard Optical & Electrical Characteristics**

LED BRAND: EVERLIGHT  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 1600LM  
 SYSTEM OUTPUT: 1300LM  
 LED POWER: 19W  
 SYSTEM POWER: 20W  
 BEAM: 110°



KF1015A-20W-3000K-110°



Photometric files for other CCT & beam are available



**Standard Packing Information**

CARTON BOX: 640X420X425MM  
 PCS/CARTON: 4 PCS  
 CARTON G.W.: 10.5KG

# PENDANT LIGHT



CE RoHS


HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	110°



## KF1014

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

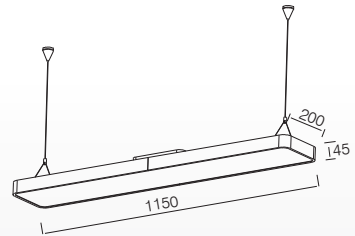


### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION: 1150X200X45MM




### Standard Optical & Electrical Characteristics

LED BRAND: LUMENMAX  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 2800LM  
 SYSTEM OUTPUT: 2200LM  
 LED POWER: 30W  
 SYSTEM POWER: 35W  
 BEAM: 110°



KF1014-35W-3000K-110°




Photometric Files For Other Cct & Beam Are Available



### Standard Packing Information

CARTON BOX: 1165X320X230MM  
 PCS/CARTON: 4 PCS  
 CARTON G.W.: 17.3KG

# PENDANT LIGHT



- KF1019**     $\Phi$ 355X92
- KF1020**     $\Phi$ 500X92
- KF1021**     $\Phi$ 750X104
- KF1022**     $\Phi$ 1000X104

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI >80 >90

CCT 3000K 4000K

BEAM 100°




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL9016  
 IP: 20




### Standard Optical & Electrical Characteristics

LED BRAND: EDISON  
 DRIVER BRAND: AREEK  
 CCT: 3000K  
 CRI: > 80  
 BEAM: 100°



KF1019-20W-3000K-100°



Photometric files for other CCT & beam are available

ITEM NO.	INPUT	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
KF1019	110-230V AC 50HZ	18W	20W	1750LM	1400LM	410x410x110mm	1	3KG
KF1020	220-230V AC 50HZ	28W	30W	2600LM	2100LM	560x560x110mm	1	4KG
KF1021	220-230V AC 50HZ	48W	50W	4300LM	3500LM	810x810x110mm	1	5KG
KF1022	220-230V AC 50HZ	96W	100W	8700LM	7000LM	1060x1060x110mm	1	6KG

# PENDANT LIGHT



**SL362A**     $\Phi 86 \times 200 \text{mm}$

**SL362B**     $\Phi 86 \times 250 \text{mm}$

**SL362C**     $\Phi 86 \times 350 \text{mm}$



### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K 4000K	BEAM	16° 25° 30° 33°
----------	-----	-----	----------------	------	-----------------




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20




### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC  
 CCT: 3000K  
 CRI: >80  
 BEAM: 25°



SL362B-28W-3000K-25°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
SL362A	18W	20W	2000LM	1600LM	275X310X275mm	8	5.8KG
SL362B	25W	28W	2800LM	2240LM	275X280X275mm	6	6.3KG
SL362C	38W	42W	4200LM	3360LM	275X380X275mm	6	7.8KG




# PENDANT LIGHT



**SL363A** 80X80X200mm

**SL363B** 80X80X250mm

**SL363C** 80X80X350mm



### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	16° 25° 30° 38°
----------	------------	-----	----------------	------	-----------------




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20



### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC  
 CCT: 3000K  
 CRI: >80  
 BEAM: 25°

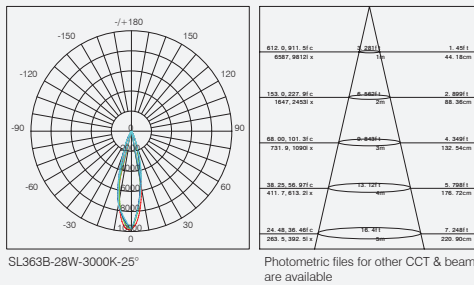


ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
SL363A	18W	20W	2000LM	1600LM	275X310X275mm	8	5.6KG
SL363B	25W	28W	2800LM	2240LM	275X280X275mm	6	6KG
SL363C	38W	40W	4200LM	3360LM	275X380X275mm	6	7.5KG

# PENDANT LIGHT



HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	115°

## SL2080



### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION: Φ222X46MM



### Standard Optical & Electrical Characteristics

LED BRAND: EDISON  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 1000LM  
 SYSTEM OUTPUT: 850LM  
 LED POWER: 14W  
 SYSTEM POWER: 16W  
 BEAM: 115°



7.264, 28.191°	28.191°	19.211lx
77.456, 28.191°	28.191°	214.24lx
1.811, 45.848°	45.848°	20.821lx
16.16, 45.848°	45.848°	236.47lx
0.9048, 62.910°	62.910°	30.921lx
8.664, 62.910°	62.910°	342.71lx
0.4528, 79.871°	79.871°	41.241lx
4.873, 79.871°	79.871°	456.95lx
0.2886, 96.848°	96.848°	51.251lx
3.116, 96.848°	96.848°	557.19lx


Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 475X475X380MM  
 PCS/CARTON: 16 PCS  
 CARTON G.W.: 19KG

# PENDANT LIGHT



- KF1030**     $\Phi$ 417X82mm
- KF1031**     $\Phi$ 368X82mm



### Trim Finish Optional:

- Golden
- Red
- Black

HIGH CRI	>80	3000K CCT	4000K	BEAM	115°
	>90				




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20



### Standard Optical & Electrical Characteristics

LED BRAND: PUSISAT  
 INPUT: 220-240V AC 50/60Hz  
 CCT: 3000K  
 CRI: >80  
 BEAM: 115°

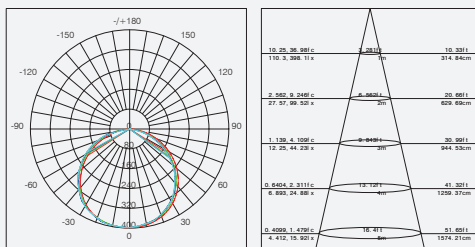


KF1030-25W-3000K-115°

Photometric files for other CCT & beam are available

ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
KF1030	30W	2600LM	1600LM	470X465X420mm	4	6.5KG
KF1031	25W	1300LM	1000LM	420X415X420mm	4	5.2KG

# PENDANT LIGHT



**KF1032A**

**AC As Optional**

**Trim Finish Optional:**

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	110°
----------	------------	-----	----------------	------	------




**Standard Mechanical Parameters**

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi$ 356X109MM




**Standard Optical & Electrical Characteristics**

LED BRAND: EDISON  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 2400LM  
 SYSTEM OUTPUT: 1920LM  
 LED POWER: 26W  
 SYSTEM POWER: 30W  
 BEAM: 110°



KF1032A-30W-3000K-110°



Photometric files for other CCT & beam are available



**Standard Packing Information**



CARTON BOX: 395X395X540MM  
 PCS/CARTON: 4 PCS  
 CARTON G.W.: 6.5KG

# PENDANT LIGHT



HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	130°

## KF1016

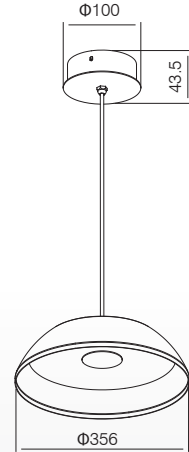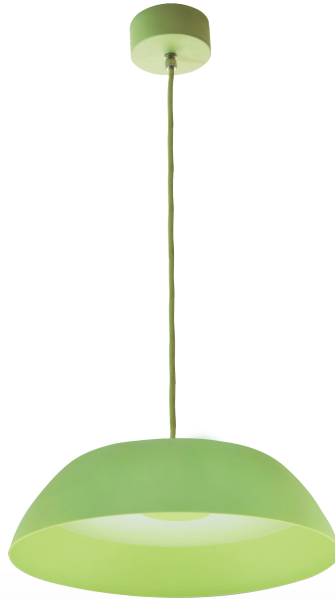

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005





### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 305 \times 305 \text{MM}$



### Standard Optical & Electrical Characteristics

LED BRAND: NICHIA  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 1820LM  
 SYSTEM OUTPUT: 1460LM  
 LED POWER: 21W  
 SYSTEM POWER: 25W  
 BEAM: 130°





Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 325X335X390MM  
 PCS/CARTON: 4 PCS  
 CARTON G.W.: 7.2KG

# PENDANT LIGHT

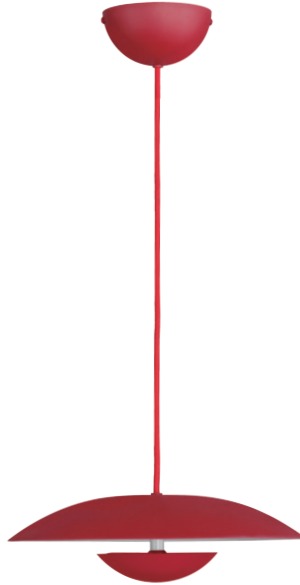

**KF1018**

**Trim Finish Optional:**

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	100°
----------	------------	-----	----------------	------	------




**Standard Mechanical Parameters**

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi$ 310x310MM




**Standard Optical & Electrical Characteristics**

LED BRAND: NICHIA  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 1000LM  
 SYSTEM OUTPUT: 800LM  
 LED POWER: 12W  
 SYSTEM POWER: 16W  
 BEAM: 100°



KF1018-16W-3000K-100°



Photometric files for other CCT & beam are available



**Standard Packing Information**

CARTON BOX: 645X645X480MM  
 PCS/CARTON: 12 PCS  
 CARTON G.W.: 13.4KG

# PENDANT LIGHT



HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	76°





**KF1027** 1040XH56MM

**KF1027A** 1040XH75MM



**Trim Finish Optional:**

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

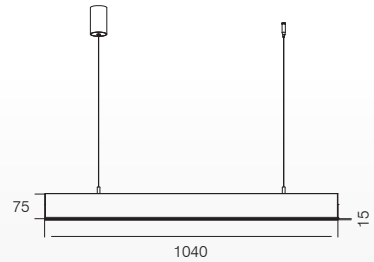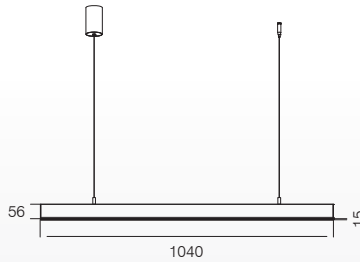


**Standard Mechanical Parameters**

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20



**Standard Optical & Electrical Characteristics**

LED BRAND: EVERLIGHT  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 1180LM  
 SYSTEM OUTPUT: 950LM  
 LED POWER: 33W  
 SYSTEM POWER: 37W  
 BEAM: 76°



KF1027-37W-3000K-76°

45.83.50.911 c	2011	3.4621
436.5.844.83 *	2011	106.194cm
10.21.14.085 c	4.8424	6.8581
106.9.161.21 *	2011	212.32cm
4.537.6.658 c	9.8488	10.421
48.84.71.65 *	2011	218.48cm
2.553.3.744 c	14.721	13.931
27.47.40.305 *	2011	424.84cm
1.633.2.386 c	18.91	17.411
17.58.22.79 *	2011	630.80cm


Photometric files for other CCT & beam are available




**Standard Packing Information**

CARTON BOX: 1115X355X205MM  
 PCS/CARTON: 12 PCS  
 CARTON G.W.: 13KG

# PENDANT LIGHT

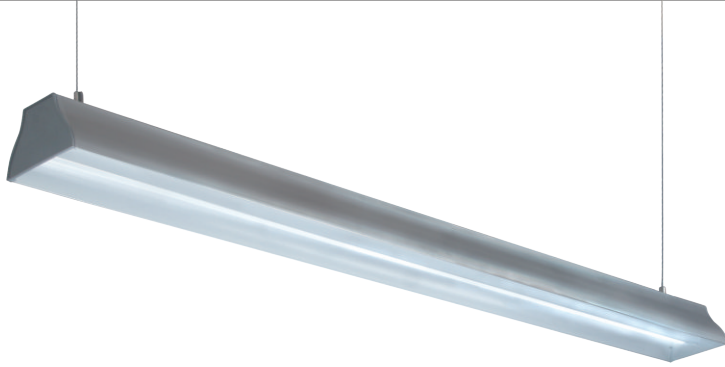

## KF1013

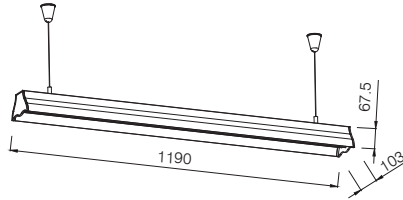

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION: 1190x103XH67.5MM




### Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 2870LM  
 SYSTEM OUTPUT: 2300LM  
 LED POWER: 33W  
 SYSTEM POWER: 36W  
 BEAM: 112°



KF1018-16W-3000K-100°



Photometric files for other CCT & beam are available



### Standard Packing Information



CARTON BOX: 1220X108X74MM  
 PCS/CARTON: 8 PCS  
 CARTON G.W.: 22.5KG




# PENDANT LIGHT



**KF1012A**

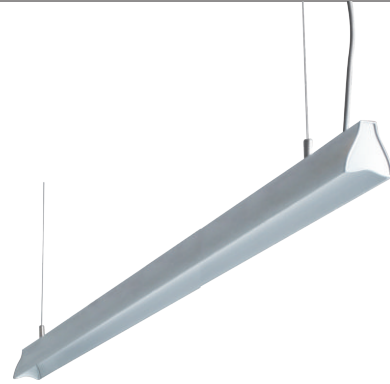

**KF1012B**




## Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




## Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20



KF1015-40W-3000K-110°



Photometric files for other CCT & beam are available



## Standard Optical & Electrical Characteristics

LED BRAND: EVERLIGHT  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 3110LM  
 SYSTEM OUTPUT: 2500LM  
 BEAM: 112°


ITEM NO.	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
KF1012A	18W	1500LM	1200LM	1220X240X200MM	12	22KG
KF1012B	27W	2120LM	1700LM	1770X240X200MM	12	33KG

# PENDANT LIGHT



HIGH CRI	>80	BEAM	10°
	>90		
CCT	3000K		
	4000K		

## SL367



### Trim Finish Optional:

- white
- blue
- green
- yellow
- pink




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016 OR Electroplate  
 IP: 20



### Standard Optical & Electrical Characteristics

LED BRAND: CREE  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 275LM  
 SYSTEM OUTPUT: 220LM  
 SYSTEM POWER: 3W  
 BEAM: 10°



SL367-3W-3000K-10°

268.2, 368.41 c	0.2511	0.4451
2682, 368271 x	0.2511	13.58cm
67.54, 92.14 c	0.3401	0.89511
231.0, 341.0 c	0.3401	27.15cm
22.72, 40.92 c	0.4401	1.3351
220.7, 440.9 c	0.4401	40.89cm
16.75, 23.04 c	0.5401	1.781
180.4, 248.0 c	0.5401	54.26cm
10.73, 14.74 c	0.6401	2.2251
115.5, 158.7 c	0.6401	67.82cm

Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 785X450X430MM  
 PCS/CARTON: 50 PCS  
 CARTON G.W.: 20KG

# PENDANT LIGHT




HIGH CRI >80  
CCT 3000K  
>90  
4000K

BEAM 40°



## SL368



### Trim Finish Optional:

- white
- blue
- green
- yellow
- pink




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
SURFACE FINISH: MW RA L9016 OR Electroplate  
IP: 20




### Standard Optical & Electrical Characteristics

LED BRAND: CREE  
DRIVER BRAND: AREEK  
INPUT: 110-230V AC 50/60HZ  
CCT: 3000K  
CRI: >80  
LED OUTPUT: 175LM  
SYSTEM OUTPUT: 140LM  
SYSTEM POWER: 3W  
BEAM: 40°



SL368-3W-3000K-40°



Photometric files for other CCT & beam are available



### Standard Packing Information


CARTON BOX: 785X450X430MM  
PCS/CARTON: 50 PCS  
CARTON G.W.: 20KG

# PENDANT LIGHT



HIGH CRI	>80	BEAM	10°
	>90		
CCT	3000K		
	4000K		

## SL369



### Trim Finish Optional:

- white
- blue
- green
- yellow
- pink




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016 OR Electroplate  
 IP: 20



### Standard Optical & Electrical Characteristics

LED BRAND: CREE  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 275LM  
 SYSTEM OUTPUT: 220LM  
 SYSTEM POWER: 3W  
 BEAM: 10°



SL367-3W-3000K-10°

288.2, 368.81 x	28.11°	0.4431 l
2460, 30871 x	28.11°	13.186cm
67.04, 82.141 x	28.11°	0.8801 l
731.6, 921.81 x	28.11°	21.156cm
23.79, 40.851 x	28.11°	1.3351 l
320.7, 448.81 x	28.11°	40.636cm
16.76, 23.041 x	10.191°	1.781 l
180.4, 248.01 x	10.191°	54.28cm
10.73, 14.741 x	10.191°	2.2251 l
115.5, 158.71 x	10.191°	67.62cm

Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 785X450X430MM  
 PCS/CARTON: 50 PCS  
 CARTON G.W.: 20KG



KETAI INDUSTRIES LIGHTING CO., LTD.

Tel: +86 757 8560 7707 Email: [sales@ketailighting.com](mailto:sales@ketailighting.com)

Fax: +86 757 8563 3675 Website: [www.ketailighting.com](http://www.ketailighting.com)

4 Mashe New Street, Lishui, Nanhai, Foshan, Guangdong,  
China 528244