


# CATALOGUE


2016-2017 v2.0



# KETAI

*we love our lights, we enjoy our life*

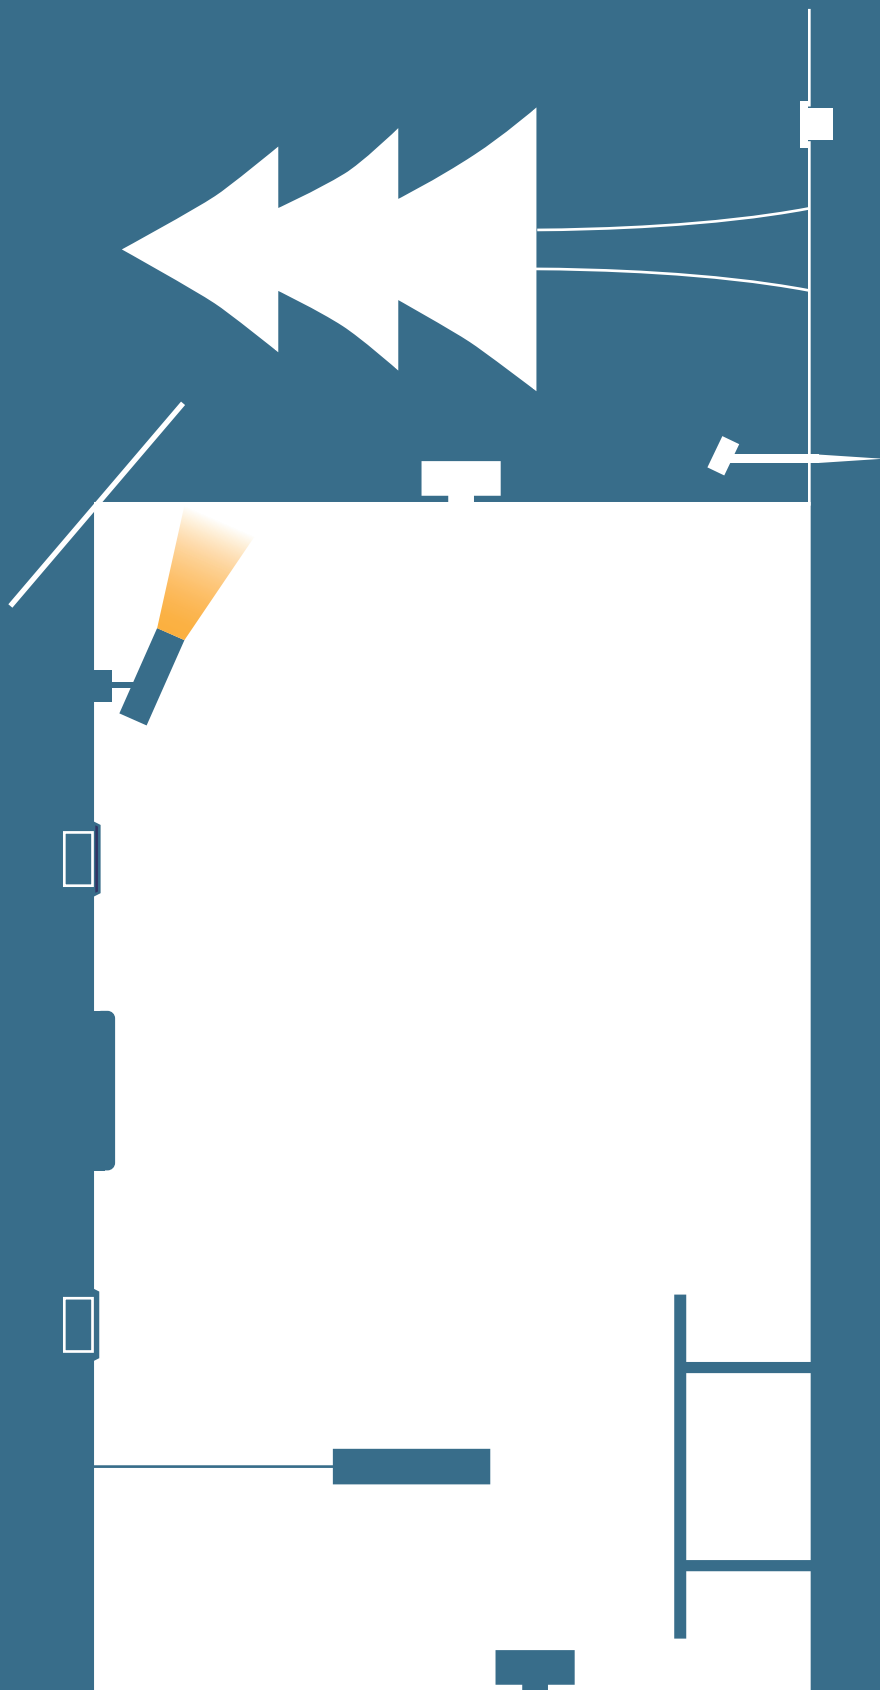

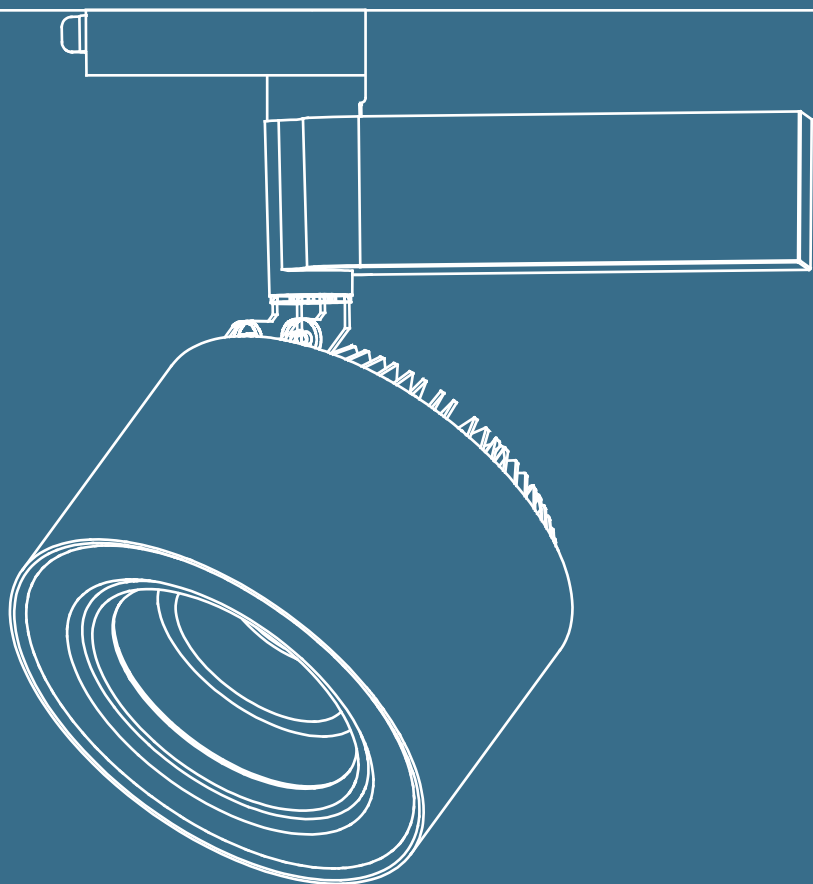

TRACK LIGHT



HIGH CRI >80  
>90

CCT 3000K  
4000K


BEAM 15° 24° 45°



## MHT8584

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
SURFACE FINISH: MW RAL 9016  
IP: 20  
OVERALL DIMENSION:  $\Phi 96 \times 124 \times H233 \text{MM}$




### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
DRIVER BRAND: AREEK  
INPUT: 110-230V AC 50/60HZ  
CCT: 3000K  
CRI: > 80  
LED OUTPUT: 3000LM  
SYSTEM OUTPUT: 2400LM  
LED POWER: 25W  
SYSTEM POWER: 30W  
BEAM: 15°



MHT8584-30W-3000K-15°



Photometric files for other CCT & beam are available




### Standard Packing Information

CARTON BOX: 595X495X335MM  
PCS/CARTON: 12PCS  
CARTON G.W.: 12KG

# TRACK LIGHT



CE RoHS



**MHT8584A**



## Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	15° 24° 45°
	>90		4000K		




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 95 \times 114 \times H200 \text{MM}$




### Standard Optical & Electrical Characteristics

LED BRAND: LUMENS  
 INPUT: 220-240V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 3000LM  
 SYSTEM OUTPUT: 2400LM  
 SYSTEM POWER: 30W  
 BEAM: 15°



MHT8584A-30W-3000K-15°



Photometric Files For Other Cct & Beam Are Available



### Standard Packing Information

CARTON BOX: 415X255X420MM  
 PCS/CARTON: 8PCS  
 CARTON G.W.: 8.1KG



HIGH CRI	>80	>90	
CCT	3000K	4000K	
BEAM	24°	40°	60°




★ AC

## MHT8584H

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION: Ø95X114XH329MM




### Standard Optical & Electrical Characteristics

LED BRAND: LUMENS  
 INPUT: 220-240V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 4250LM  
 SYSTEM OUTPUT: 3400LM  
 SYSTEM POWER: 40W  
 BEAM: 24°



MHT8584-40W-3000K-24°



Photometric Files For Other Cct & Beam Are Available




### Standard Packing Information

CARTON BOX: 495X335X485MM  
 PCS/CARTON: 6PCS  
 CARTON G.W.: 11KG

# TRACK LIGHT



CE RoHS



**MHT8584B-L20**    Ø95X114X322mm

**MHT8584B-L30**    Ø95X114X472mm

**MHT8584B-L40**    Ø95X114X672mm

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	10° 18° 30° 60°
	>90		4000K		




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL9016  
 IP: 20




### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 BEAM: 18°



MHT8584B-40W-3000K-18°



Photometric files for other CCT & beam are available

ITEM NO.	LED POWER	SYSTEM POWER	LED OUTPUT	SYSTEM OUTPUT	CARTON SIZE	PCS/CTN	G.W.
MHT8584B-L20	36W	40W	4250LM	3400LM	370X475X460mm	8	11KG
MHT8584B-L30	36W	40W	4250LM	3400LM	500X475X360mm	8	12KG
MHT8584B-L40	36W	40W	4250LM	3400LM	700X475X360mm	8	14KG




HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	24°



## MHT8585

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 125 \times 144 \times H261 \text{MM}$




### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: HEP  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 4250LM  
 SYSTEM OUTPUT: 3400LM  
 LED POWER: 36W  
 SYSTEM POWER: 40W  
 BEAM: 24°



MHT8585-40W-3000K-24°



Photometric files for other CCT & beam are available




### Standard Packing Information

CARTON BOX: 495X320X560MM  
 PCS/CARTON: 8PCS  
 CARTON G.W.: 11KG



# TRACK LIGHT



**MHT8585A**



**Trim Finish Optional:**

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	24°
	>90		4000K		




**Standard Mechanical Parameters**

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi$ 126X127XH230MM




**Standard Optical & Electrical Characteristics**

LED BRAND: LUMENS  
 INPUT: 220-240V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 4250LM  
 SYSTEM OUTPUT: 3400LM  
 SYSTEM POWER: 40W  
 BEAM: 24°



MHT8585A-22W-3000K-24°



Photometric files for other CCT & beam are available



**Standard Packing Information**

CARTON BOX: 570X405X295MM  
 PCS/CARTON: 20PCS  
 CARTON G.W.: 34KG


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	25°



## MHT8586

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 145 \times 149 \times 258 \text{MM}$



### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: HEP  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 6800LM  
 SYSTEM OUTPUT: 5500LM  
 LED POWER: 55W  
 SYSTEM POWER: 60W  
 BEAM: 25°



1,288, 12812 c 13027, 21319 c	0-25° 25°	1,392 c 42, 150 c
301, 4, 485, 11 c 3459, 5320 c	0-50° 50°	2, 750 c 84, 31 c
143, 8, 220, 11 c 1537, 2369 c	0-75° 75°	4, 142 c 126, 46 c
80, 24, 123, 8 c 864, 8, 1321 c	0-101° 101°	6, 532 c 158, 61 c
51, 42, 20, 22 c 523, 8, 828, 11 c	0-111° 111°	6, 912 c 210, 76 c

Photometric files for other CCT & beam are available




### Standard Packing Information

CARTON BOX: 495X335X485MM  
 PCS/CARTON: 6PCS  
 CARTON G.W.: 14KG

# TRACK LIGHT



CE RoHS



## MHT8573

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



>80  
>90



3000K  
4000K



15° 25° 60°




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
SURFACE FINISH: MW RAL9016  
IP: 20  
OVERALL DIMENSION:  $\Phi 143 \times H 97 \text{MM}$




### Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX  
DRIVER BRAND: AREEK  
INPUT: 110-230V AC 50/60HZ  
CCT: 3000K  
CRI: > 80  
LED OUTPUT: 5400LM  
SYSTEM OUTPUT: 4340LM  
LED POWER: 46W  
SYSTEM POWER: 50W  
BEAM: 15°



MHT8573-50W-3000K-15°



Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 545X285XH455MM  
PCS/CARTON: 6PCS  
CARTON G.W.: 10KG


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	18° 30°



## MHT8554

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 125 \times 70 \times H143.5 \text{MM}$



### Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 2750LM  
 SYSTEM OUTPUT: 2200LM  
 LED POWER: 23W  
 SYSTEM POWER: 26W  
 BEAM: 18°



MHT8554-26W-3000K-18°

E(h)	h(m)	20.58 °	Ø(cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1980	5		127.94


Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 445X340X380MM  
 PCS/CARTON: 8PCS  
 CARTON G.W.: 11KG

# TRACK LIGHT



## MHT8558

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 125 \times 70 \times H229 \text{MM}$



### Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 2750LM  
 SYSTEM OUTPUT: 2200LM  
 LED POWER: 23W  
 SYSTEM POWER: 26W  
 BEAM: 18°



MHT8558-26W-3000K-18°

E (lx)	h (m)	∅ (cm)
49027	20.58	25.59
12251		51.18
5445		76.76
3063		102.35
1960		127.94

Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 445X340XH380MM  
 PCS/CARTON: 8PCS  
 CARTON G.W.: 11KG




HIGH CRI	>80
	>90
CCT	3000K
	4000K
BEAM	18° 30°



## MHT8572

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 125 \times 70 \times H140 \text{MM}$



### Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 2750LM  
 SYSTEM OUTPUT: 2200LM  
 LED POWER: 23W  
 SYSTEM POWER: 26W  
 BEAM: 18°



MHT8572-26W-3000K-18°


EI(x)	h(m)	$\theta$ (cm)
49027	20.58	25.59
12251	51.18	
5445	76.76	
3063	102.35	
1960	127.94	

Photometric files for other CCT & beam are available



### Standard Packing Information


CARTON BOX: 570X200X250MM  
 PCS/CARTON: 6PCS  
 CARTON G.W.: 11KG

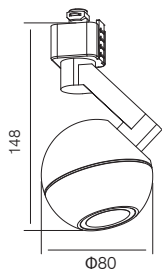

**MHT8588**

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION: Ø80X148MM



### Standard Optical & Electrical Characteristics

LED BRAND: LUMENS  
 INPUT: 220-240V AC 50HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 760LM  
 SYSTEM OUTPUT: 610LM  
 SYSTEM POWER: 8W  
 BEAM: 40°



### Standard Packing Information

CARTON BOX: 570X405X295MM  
 PCS/CARTON: 20 PCS  
 CARTON G.W.: 16KG

HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30°




**KTK1-8587**

**HKTA-8587**



**HC8587**



**Trim Finish Optional:**

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



**Standard Mechanical Parameters**

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION: 123X83MM



**Standard Optical & Electrical Characteristics**


LED BRAND: BRIDGELUX  
 DRIVER BRAND: HEP  
 INPUT: 110-240V AC 50HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 680LM  
 SYSTEM OUTPUT: 550LM  
 LED POWER: 6W  
 SYSTEM POWER: 7.5W  
 BEAM: 30°



**Standard Packing Information**

CARTON BOX: 485X355X280MM  
 PCS/CARTON: 24 PCS  
 CARTON G.W.: 11.8KG





**KTK1-8591**

**HKTA-8591**



**HC-8591**

**Trim Finish Optional:**

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



**Standard Mechanical Parameters**

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION: 87X58MM



**Standard Optical & Electrical Characteristics**

LED BRAND: BRIDGELUX  
 DRIVER BRAND: HEP  
 INPUT: 110-240V AC 50HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 680LM  
 SYSTEM OUTPUT: 550LM  
 LED POWER: 6W  
 SYSTEM POWER: 7.5W  
 BEAM: 30°



**Standard Packing Information**

CARTON BOX: 485X355X280MM  
 PCS/CARTON: 24 PCS  
 CARTON G.W.: 11.5KG

HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	30°




**KTK1-8592**

**HKTA-8592**



**HC-8592**



### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005



### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 60 \times 88 \text{MM}$




### Standard Optical & Electrical Characteristics

LED BRAND: BRIDGELUX  
 DRIVER BRAND: HEP  
 INPUT: 110-240V AC 50HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 6800LM  
 SYSTEM OUTPUT: 550LM  
 LED POWER: 6W  
 SYSTEM POWER: 7.5W  
 BEAM: 28°



### Standard Packing Information

CARTON BOX: 485X355X280MM  
 PCS/CARTON: 24 PCS  
 CARTON G.W.: 12.2KG

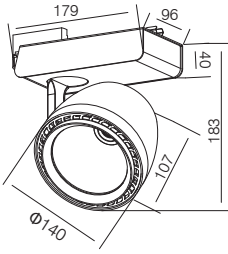

## MHT8575

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	12° 22° 36°
	>90		4000K		




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION: Ø104X50MM



### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: OSRAM  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 4100LM  
 SYSTEM OUTPUT: 3400LM  
 LED POWER: 41W  
 SYSTEM POWER: 47W  
 BEAM: 12°



MHT8575-47W-3000K-12°

1969, 23027 f.c.	2.251	0.98971
17626, 22746 x	17.26cm	
417, 1, 108, 37 f.c.	2.4824	1.1391
4450, 6435 f.c.	37	34.72cm
185, 4, 205, 81 f.c.	0.4484	1.7081
1995, 28411 x	351	52.67cm
104, 3, 149, 51 f.c.	1.9101	2.2781
1122, 1606 x	4	62.43cm
65, 73, 95, 681 f.c.	16.91	2.6471
718, 3, 1020 x	6	66.79cm

Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 535X285X455MM  
 PCS/CARTON: 6PCS  
 CARTON G.W.: 12.1KG


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15° 24°



## MHT8583

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

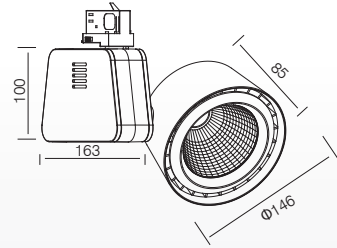


### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 146 \times 100 \times 150 \text{MM}$




### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 4000LM  
 SYSTEM OUTPUT: 3230LM  
 LED POWER: 38W  
 SYSTEM POWER: 40W  
 BEAM: 24°



MHT8583-40W-3000K-24°



Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 495X455X440MM  
 PCS/CARTON: 8 PCS  
 CARTON G.W.: 13.2KG



## MHT8557

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

HIGH CRI	>80	CCT	3000K	BEAM	17° 24° 60°
	>90		4000K		




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL9016  
 IP: 20




### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: > 80  
 LED OUTPUT: 1400LM  
 SYSTEM OUTPUT: 1100LM  
 LED POWER: 12W  
 SYSTEM POWER: 16W  
 BEAM: 24°



MHT8557-16W-3000K-24°



Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 475X445X315MM  
 PCS/CARTON: 12 PCS  
 CARTON G.W.: 9.5KG


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15°



## MHT8594

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION: Ø86X200MM




### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 1800LM  
 SYSTEM OUTPUT: 1500LM  
 LED POWER: 18W  
 SYSTEM POWER: 20W  
 BEAM: 15°



MHT9594-20W-3000K-15°



Photometric files for other CCT & beam are available




### Standard Packing Information

CARTON BOX: 390X315X380MM  
 PCS/CARTON: 12 PCS  
 CARTON G.W.: 14KG

# TRACK LIGHT



CE RoHS

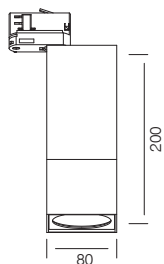

## MHT8595

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION: 80X200MM



### Standard Optical & Electrical Characteristics

LED BRAND: CITIZEN  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 1800LM  
 SYSTEM OUTPUT: 1500LM  
 LED POWER: 18W  
 SYSTEM POWER: 20W  
 BEAM: 35°



MHT8595-20W-3000K-35°

199.2, 311.27°	251.0	2.106E1
214.4, 330.9°	50	64.156cm
49.79, 77.811°	8.8609E-1	4.212E1
235.9, 307.0°	250	128.21cm
22.13, 34.981°	9.0499E-1	6.218E1
236.2, 317.0°	300	192.56cm
12.45, 19.481°	11.107E1	8.422E1
134.0, 209.4°	400	256.74cm
7.965, 12.481°	18.91E1	15.52E1
82.75, 134.0°	500	320.92cm

Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 390X315X380MM  
 PCS/CARTON: 12PCS  
 CARTON G.W.: 11.5KG




HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	38°



## MHT8596A

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION:  $\Phi 76 \times 185 \text{MM}$




### Standard Optical & Electrical Characteristics

LED BRAND: LUMENS  
 INPUT: 220-240V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 1800LM  
 SYSTEM OUTPUT: 1500LM  
 SYSTEM POWER: 20W  
 BEAM: 38°



MHT8596A-20W-3000K-38°



Photometric files for other CCT & beam are available



### Standard Packing Information


CARTON BOX: 390X295X340MM  
 PCS/CARTON: 12 PCS  
 CARTON G.W.: 11KG



# TRACK LIGHT



CE RoHS

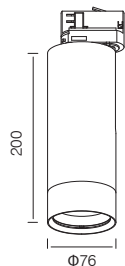

**MHT8596B**



### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005




### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RAL 9016  
 IP: 20  
 OVERALL DIMENSION: Ø76X200MM




### Standard Optical & Electrical Characteristics

LED BRAND: LUMENS  
 INPUT: 220-240V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 2800LM  
 SYSTEM OUTPUT: 2200LM  
 SYSTEM POWER: 30W  
 BEAM: 40°



MHT8596B-30W-3000K-40°



Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 390X315X380MM  
 PCS/CARTON: 12PCS  
 CARTON G.W.: 11KG

# TRACK LIGHT



CE RoHS


HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	40°



## MHT8597

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

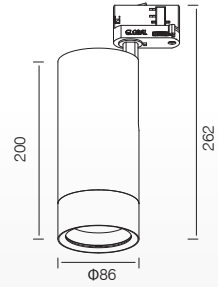


### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION: Ø86X200MM



### Standard Optical & Electrical Characteristics

LED BRAND: LUMENS  
 INPUT: 220-240V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 4200LM  
 SYSTEM OUTPUT: 3300LM  
 SYSTEM POWER: 40W  
 BEAM: 40 °



MHT8597-40W-3000K-40°

300.0 464.30° c	2810	0.3220 f
534.0 2111° x	10	70.40cm
77.44 122.81° c	4.840 f	4.647 f
833.0 13200° x	200	141.63cm
34.42 54.92° c	9.040 f	6.971 f
370.0 5.91 21° x	200	212.45cm
19.36 20.89° c	12.10 f	9.284 f
208.0 4.32 5° x	400	283.27cm
12.39 10.77° c	16.41 f	11.62 f
132.0 4.212 2° x	800	354.06cm

Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 390X315X380MM  
 PCS/CARTON: 12 PCS  
 CARTON G.W.: 14KG

# TRACK LIGHT



HIGH CRI	>80 >90
CCT	3000K 4000K
BEAM	15°




**KTK8801** ( 2 WIRE )

**HKTA8801** ( 3 WIRE )

### Trim Finish Optional:

- Matte White RAL 9016
- Matte Grey RAL 9006
- Matte Black RAL 9005

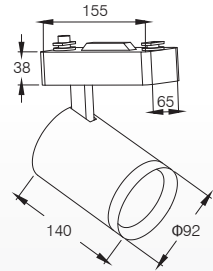


### Standard Mechanical Parameters

MAIN BODY MATERIAL: ALUMINIUM DIE-CASTING  
 SURFACE FINISH: MW RA L9016  
 IP: 20  
 OVERALL DIMENSION: Ø86X200MM



### Standard Optical & Electrical Characteristics

LED BRAND: EVERCORE  
 DRIVER BRAND: AREEK  
 INPUT: 110-230V AC 50/60HZ  
 CCT: 3000K  
 CRI: >80  
 LED OUTPUT: 3310LM  
 SYSTEM OUTPUT: 2650LM  
 LED POWER: 28W  
 SYSTEM POWER: 30W  
 BEAM: 15 °



HKTA8801-30W-3000K-15°

1006 1880°c	2.281m	0.8571l
1408 22000°c	3m	08.150cm
336 5.411 0°c	3.062m	1.7141l
3515 20160°c	4m	52.24cm
145 1.208 0°c	3.842m	0.5711l
1542 22560°c	5m	78.36cm
81 43.117 0°c	19.120m	3.4281l
878 7.12680°c	25m	104.48cm
43 25.73 45°c	16.41m	4.2801l
563 4.812 11°c	4m	130.65cm

Photometric files for other CCT & beam are available



### Standard Packing Information

CARTON BOX: 390X315X380MM  
 PCS/CARTON: 12 PCS  
 CARTON G.W.: 14KG



KETAI INDUSTRIES LIGHTING CO., LTD.

Tel: +86 757 8560 7707 Email: [sales@ketailighting.com](mailto:sales@ketailighting.com)

Fax: +86 757 8563 3675 Website: [www.ketailighting.com](http://www.ketailighting.com)

4 Mashe New Street, Lishui, Nanhai, Foshan, Guangdong,  
China 528244