

OUTDOOR LIGHT (WALL LIGHT)




OUTDOOR LIGHT (WALL LIGHT)



Wall light WL569



Wall light WL576




Wall light WL577



Wall light WL558

OUTDOOR LIGHT (WALL LIGHT)

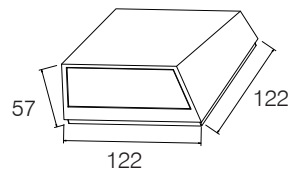

WL569

   IP65 CE RoHS

417LM @ 3000K / CRI 80 / Philip3030

220~240V AC 50/60 Hz, 12W, (Dimmable Optional)
Aluminum Outdoor Wall Light

Packing Information


Carton Dimension: 405X275X280 mm
PCS / Carton: 24

Surface Finish


Sand White
Sand Grey
Sand Black

Character Optional

HIGH	>80		3000K
CRI	>90	CCT	4000K

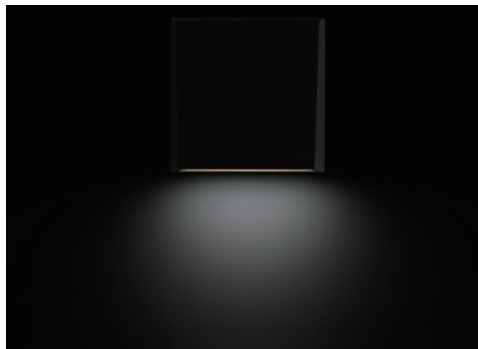

OUTDOOR LIGHT (WALL LIGHT)

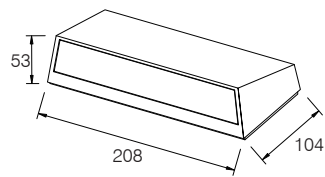

WL576

550LM @ 3000K / CRI 80 / Philips3030

220~240V AC 50/60 Hz, 16W, (Dimmable Optional)
Aluminum Outdoor Wall Light

Packing Information

Carton Dimension: 345X225X260 mm
PCS / Carton: 12

Surface Finish


Sand White
Sand Grey
Sand Black

Character Optional

HIGH CRI	>80	3000K
	>90	4000K



OUTDOOR LIGHT (WALL LIGHT)

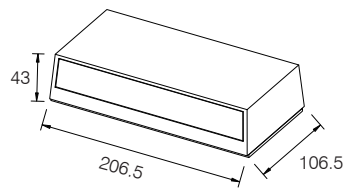

WL577

906LM @ 3000K / CRI 80 / Philip3030

220~240V AC 50/60 Hz, 30W, (Dimmable Optional)
Aluminum Outdoor Wall Light

Packing Information


Carton Dimension: 345X225X240 mm
PCS / Carton: 12

Surface Finish


Sand White
Sand Grey
Sand Black

Character Optional

HIGH	>80		3000K
CRI	>90	CCT	4000K

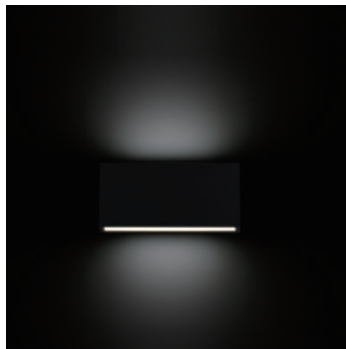

OUTDOOR LIGHT (WALL LIGHT)

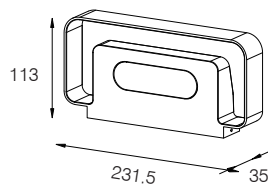

WL558

   IP65 CE RoHS

223LM @ 3000K / CRI 80 / Philip3030

220~240V AC 50/60 Hz, 8W, (Dimmable Optional)
Aluminum Outdoor Wall Light

Packing Information

Carton Dimension: 470X375X260 mm
PCS / Carton: 30

Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

HIGH CRI	>80	CCT	3000K
	>90		4000K



OUTDOOR LIGHT (UNDERGROUND LIGHT)



OUTDOOR LIGHT (UNDERGROUND LIGHT)




Underground light FL937



Underground light KT8763

OUTDOOR LIGHT (UNDERGROUND LIGHT)

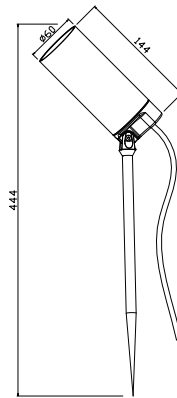

FL937   

480LM @ 3000K / CRI 80 / 4° / 25° / CREE

220~240V AC 50/60 Hz, 8W, (Dimmable Optional)
Aluminum Rotatable and Tilted Underground Light


Surface Finish

Trim Finish
Sand White
Sand Grey
Sand Black

Character Optional



OUTDOOR LIGHT (UNDERGROUND LIGHT)



FL568

480LM @ 3000K / CRI 80 / 4° / 25° / CREE

220~240V AC 50/60 Hz, 8W, (Dimmable Optional)
Aluminum Underground Light, Head Fixed

Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

HIGH
CRI

>80
>90

CCT

3000K
4000K

BEAM

4° 25°

