


PENDANT LIGHT



PENDANT LIGHT



PENDANT LIGHT



SL370

IP20 CE RoHS


100~240V AC 50/60Hz
Aluminum Pendant Light

Model	Power	LEDs	Driver	Flux	CCT	CRI	Carton Dimension	PCS/Carton	G.W.
SL370	15W	EPISTAR	AREEK	1095lm	3000K	>80	495X395X305mm	24	16.2 kg
SL370	15W	CITIZEN	TRIDONIC	1050lm	3000K	>90	495X395X305mm	24	16.2 kg
SL370	20W	EPISTAR	AREEK	1400lm	3000K	>80	495X395X305mm	24	16.2 kg
SL370	20W	CITIZEN	TRIDONIC	1320lm	3000K	>90	495X395X305mm	24	16.2kg


Surface Finish



Character Optional



PENDANT LIGHT



SL371

IP20 CE RoHS


100~240V AC 50/60Hz
Aluminum Pendant Light

Model	Power	LEDs	Driver	Flux	CCT	CRI	Carton Dimension	PCS/Carton	G.W.
SL371	25W	EPISTAR	AREEK	1575lm	3000K	>80	435X330X280mm	12	14.2 kg
SL371	25W	CITIZEN	TRIDONIC	1525lm	3000K	>90	435X330X280mm	12	14.2kg
SL371	30W	EPISTAR	AREEK	1770lm	3000K	>80	435X330X280mm	12	14.2 kg
SL371	30W	CITIZEN	TRIDONIC	1770lm	3000K	>90	435X330X280mm	12	14.2 kg


Surface Finish



Character Optional



PENDANT LIGHT



SL386

   IP20 CE RoHS

1080LM @ 3000K / CRI 80 / 15° / 24° / 36° / CITIZEN

100~240V AC 50/60 Hz, 12W, Global, (Dimmable Optional)
Aluminum Pendant Light
Adaptor Driver Inside

Packing Information

Carton Dimension: 450X305X410mm
PCS/Carton: 18
Carton G.W.: 16.7 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional



PENDANT LIGHT

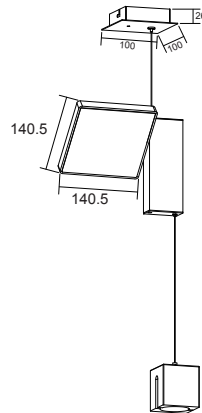

SL388

1080LM @ 3000K / CRI 80 / 15° / 24° / 36° / CITZIEN

100~240V AC 50/60 Hz, 12W, Global, (Dimmable Optional)
Aluminum Pendant Light
Adaptor Driver Inside

Packing Information

Carton Dimension: 1115X355X205mm
PCS / Carton: 18
Carton G.W.: 13 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional



PENDANT LIGHT



KF1056 / SL389

  RoHS

1080LM @ 3000K / CRI 80 / 15° / 24° / 36° / CITIZEN

100~240V AC 50/60 Hz, 12W, Global, (Dimmable Optional)
Aluminum Pendant Light
Adaptor Driver Inside

Packing Information

Carton Box: 450X305X410mm
PCS/Carton: 18
Carton G.W.: 13.5 kg



Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

						
HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	15° 24° 36°	

PENDANT LIGHT

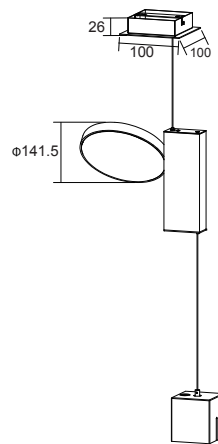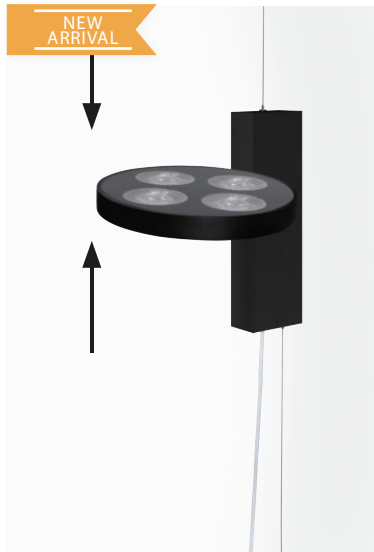

KF1057 RoHS

1080LM @ 3000K / CRI 80 / 15° / 24° / 36° / CITZIEN

110~240V AC 50/60 Hz, 12W, Global, (Dimmable Optional)
Aluminum Pendant Light
Adaptor Driver Inside

Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

					
---	---	---	---	---	---

PENDANT LIGHT



KF1055

   IP20

1800LM @ 3000K / CRI 80 / 12° / 24° / 36° / 48° / 100° / CREE+SMD835

110~240V AC 50/60 Hz, 36W, AREEK, (Dimmable Optional)
Aluminum Linear Pendant Light

Packing Information

Carton Dimension: 1165X320X230mm
PCS/Carton: 4
Carton G.W.: 17.3 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

									
CRI	>80	CCT	3000K	BEAM	12°	24°	36°	48°	100°
	>90		4000K						

PENDANT LIGHT

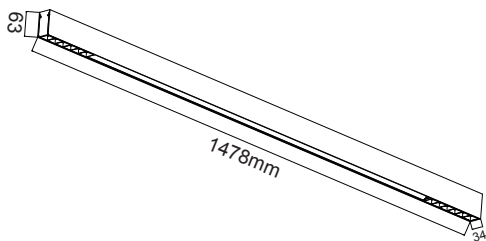

KF1054   RoHS

3000LM @ 3000K / CRI 80 / 76° / EVERLIGHT

220~240V AC 50/60 Hz, 60W, AREEK, (Dimmable Optional)
Aluminum Linear Pendant Light

Packing Information

Carton Dimension: 1115X355X205mm
PCS / Carton: 12
Carton G.W.: 13 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

					
CRI	>80 >90	CCT	3000K 4000K	BEAM	76°

PENDANT LIGHT

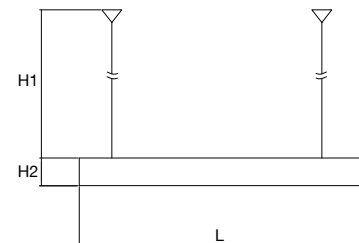

KF1051/KF1052/KF1053



CE RoHS

Flux @ 3000K / CRI 80 / 110° / CREE+SMD2835


100~240V AC 50 Hz, AREEK (Dimmable Optional)
Aluminum Linear Pendant Light

Model	Power	Flux	L X H1XH2	Carton size	Pcs/ctn	GW
KF1051	15W	900lm	641.1X1800X62.3mm	755X285X255mm	12	15 kg
KF1052	20W	1200lm	959.1X1800X62.3mm	1070X195X195mm	6	10.5 kg
KF1053	25W	1500lm	1277.1X1800X62.3mm	1390X195X195mm	6	13 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional



PENDANT LIGHT



KF1032A



CE RoHS

1920LM @ 3000K / CRI 80 / 110° / EVERLIGHT

110~230V AC 50/60 Hz, 30W, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Packing Information

Carton Dimension: 395X395X540mm
PCS / Carton: 4
Carton G.W.: 6.5 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional



PENDANT LIGHT

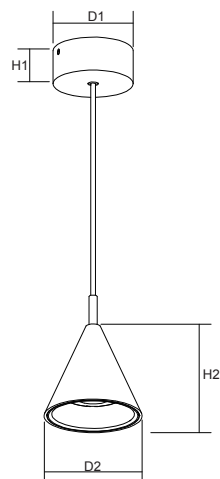

SL372 / SL373 / SL374 RoHS

FLUX @ 3000K / CRI 80 / CITIZEN

100~240V AC 50/60 Hz, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Model	Power	Flux	D1 X H1 X D2 X H2
SL372	5W	360lm	Φ80X35XΦ74X85mm
SL373	12W	720lm	Φ80X35XΦ95X98mm
SL374	20W	1400lm	Φ100X43.5XΦ138X135mm

Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

					
	>90		4000K		

PENDANT LIGHT



SL369   RoHS

90LM @ 3000K / CRI 80 / 8° / CREE

110~230V AC 50/60 Hz, 3W, 700mA, AREEK
Aluminum Pendant Light

Packing Information

Carton Box: 785X450X430mm
PCS/Carton: 50
Carton G.W.: 20 kg


Surface Finish

    
White Blue Green Yellow Pink

Character Optional



PENDANT LIGHT



SL367

IP20 CE RoHS

90LM @ 3000K / CRI 80 / 9° / CREE

110~230V AC 50/60 Hz, 3W, AREEK
Aluminum Pendant Light


Packing Information

Carton Dimension: 785X450X430mm
PCS/Carton: 50
Carton G.W.: 20 kg

Surface Finish



Character Optional



PENDANT LIGHT



SL368



IP20



RoHS

90LM @ 3000K / CRI 80 / 12° / CREE

110~230V AC 50/60 Hz, 3W, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Packing Information

Carton Dimension: 785X450X430mm
PCS / Carton: 50
Carton G.W.: 20 kg

Surface Finish

White Blue Green Yellow Pink

Character Optional

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	12°
-------------	------------	-----	----------------	------	-----



PENDANT LIGHT



KF1015

  RoHS

2500LM @ 3000K / CRI 80 / 36° / 110° / Bridgelux + EVERLIGHT

110~230V AC 50/60 Hz, 40W, AREEK, (Dimmable Optional)
Aluminum Pendant Light


Packing Information

Carton Box: 640X420X425mm
PCS/Carton: 4
Carton G.W.: 11.6 kg

Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional



PENDANT LIGHT



KF1015A



IP20

CE RoHS

1300LM @ 3000K / CRI 80 / 110° / EVERLIGHT

110~230V AC 50/60 Hz, 20W, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Packing Information

Carton Dimension: 640X420X425mm
PCS / Carton: 4
Carton G.W.: 10.5 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

HIGH CRI	>80 >90	CCT 3000K 4000K	BEAM 110°
-------------	------------	-----------------------	--------------

PENDANT LIGHT



KF1019 / KF1020 / KF1021 / KF1022

  RoHS

Flux @ 3000K / CRI 80 / 100° / EDISON

AREEK, (Dimmable Optional)
Aluminum Pendant Light

Model	Power	Input	Flux	D X H	Carton Dimension	PCS/carton	GW
KF1019	20W	110-230V AC 50Hz	1400lm	Φ355X92mm	410X410X110mm	1	3.0 kg
KF1020	30W	220-230V AC 50Hz	2100lm	Φ500X92mm	560X560X110mm	1	4.0 kg
KF1021	50W	220-230V AC 50Hz	3500lm	Φ750X104mm	810X810X110mm	1	5.0 kg
KF1022	100W	220-230V AC 50Hz	7000lm	Φ1000X104mm	1060X1060X110mm	1	6.0 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

					
HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	100°

PENDANT LIGHT



KF1030 / KF1031

IP20 CE RoHS

Flux @ 3000K / CRI 80 / 115° / PUSISAT

220-240V AC 50/60Hz, (Dimmable Optional)
Aluminum Pendant Light

Model	Power	Flux	D X H	Carton Dimension	PCS/carton	GW
KF1030	30W	1500lm	Φ417X82mm	470X465X420mm	4	6.5 kg
KF1031	25W	1250lm	Φ368X82mm	420X415X420mm	4	5.2 kg


Surface Finish

- Golden
- Red
- Black

Character Optional

HIGH CRI	>80 >90	CCT 3000K 4000K	BEAM 115°
-------------	------------	-----------------------	--------------

PENDANT LIGHT



SL362A / SL362B / SL362C

  RoHS

Flux @ 3000K / CRI 80 / 25° / CITIZEN

110-230V AC, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Model	Power	Flux	D X H	Carton Dimension	PCS/carton	GW
SL362A	20W	1600lm	Φ86X200mm	275X310X275mm	8	5.8 kg
SL362B	28W	2240lm	Φ86X250mm	275X280X275mm	6	6.3 kg
SL362C	40W	3360lm	Φ86X350mm	375X380X275mm	6	7.8 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

 HIGH CRI	 >80 >90	 CCT	 3000K 4000K	 BEAM	 16° 25° 30° 38°
--	--	---	--	--	---

PENDANT LIGHT



SL363A / SL363B / SL363C



Flux @ 3000K / CRI 80 / 25° / CITIZEN

110-230V AC, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Model	Power	Flux	L X W X H	Carton Dimension	PCS/carton	GW
SL363A	20W	1600lm	80X80X200 mm	275X310X275mm	8	5.6 kg
SL363B	28W	2240lm	80X80X250 mm	275X280X275mm	6	6.0 kg
SL363C	40W	3360lm	80X80X350 mm	275X380X375mm	6	7.0 kg


Surface Finish

Trim Finish
Sand White
Sand Grey
Sand Black

Character Optional

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	16° 25° 30° 38°
-------------	------------	-----	----------------	------	-----------------

PENDANT LIGHT



KF1016



IP20

CE RoHS

1460LM @ 3000K / CRI 80 / 130° / NICHIA

110~230V AC 50/60 Hz, 25W, AREEK
Aluminum Pendant Light

Packing Information

Carton Box: 325X335X390mm
PCS/Carton: 4
Carton G.W.: 7.2 kg

Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional



>80
>90



3000K
4000K



130°

PENDANT LIGHT



KF1018

   RoHS

800LM @ 3000K / CRI 80 / 100° / NICHIA

110~230V AC 50/60 Hz, 16W, AREEK
Aluminum Pendant Light

Packing Information

Carton Dimension: 645X645X480mm
PCS / Carton: 12
Carton G.W.: 13.4 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

					
CRI	>80 >90	CCT	3000K 4000K	BEAM	100°

PENDANT LIGHT



KF1014

   RoHS

2200LM @ 3000K / CRI 80 / 110° / LUMENMAX

110~230V AC 50/60 Hz, 35W, AREEK, (Dimmable Optional)
Aluminum Pendant Light


Packing Information

Carton Box: 1165X320X230mm
PCS/Carton: 4
Carton G.W.: 17.3 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional



PENDANT LIGHT

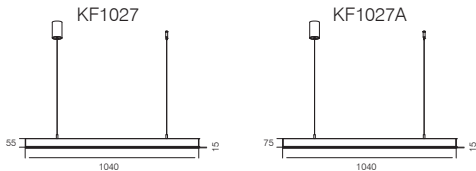

KF1027 / KF1027A



CE RoHS

1850LM @ 3000K / CRI 80 / 76° / EDISON SMD2835

110~230V AC 50/60 Hz, 37W, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Packing Information

Carton Dimension: 1115X355X205mm
PCS / Carton: 12
Carton G.W.: 13 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional

HIGH CRI	>80 >90	CCT 3000K 4000K	BEAM 76°
-------------	------------	-----------------------	-------------

PENDANT LIGHT



KF1013



CE RoHS

2300LM @ 3000K / CRI 80 / 112° / SMD 2835

110~230V AC 50/60 Hz, 36W, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Packing Information

Carton Dimension: 1220X108X74mm
PCS/Carton: 8
Carton G.W.: 22.5 kg


Surface Finish

Sand White
Sand Grey
Sand Black

Character Optional



PENDANT LIGHT



KF1012A / KF1012B



IP20

CE RoHS

Flux @ 3000K / CRI 80 / 112° / SMD 2835

110~230V AC 50/60Hz, AREEK, (Dimmable Optional)
Aluminum Pendant Light

Model	Power	Flux	L X W X H	Carton Dimension	PCS/carton	GW
KF1012A	18W	1200lm	1190X52X56 mm	1220X240X200mm	12	22 kg
KF1012B	27W	1700lm	1750X52X56 mm	1770X240X200mm	12	33 kg

Surface Finish

Trim Finish
Sand White
Sand Grey
Sand Black

Character Optional

HIGH CRI	>80 >90	CCT	3000K 4000K	BEAM	112°
----------	------------	-----	----------------	------	------