


RECESSED DOWNLIGHT

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 5
Warranty	3 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CONCH series please see page 041.

IP20

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
FT210 180Lm 3000K	2.2W	3W	SMD3014	AREEK	60	80	


OTHER ITEMS FOR CONCH FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

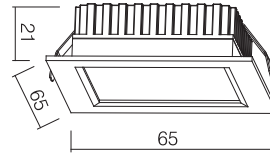

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 5
Warranty	3 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CONCH series please see page 041.

IP20

AREEK

ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
FT211 LV 180Lm 3000K	2.2W	3W	EPISTAR	AREEK	60	80	

OTHER ITEMS FOR CONCH FAMILY



RECESSED DOWNLIGHT

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MULTIS ROUND series please see page 031.

IP20

CITIZEN

AREEK

ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6538 1080Lm 3000K	11W	12W	CITIZEN	AREEK	90	80	

OTHER ITEMS FOR MULTIS ROUND FAMILY



RECESSED DOWNLIGHT

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check NASSARIUS series please see page 010.

IP20

bridgelux

TRIDONIC
TRIDONIC

OSRAM

HEP
area for light™

AREEK

www.ketailighting.com

ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6554 640Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	80	80	

OTHER ITEM FOR NASSARIUS FAMILY



RECESSED DOWNLIGHT

DIMENSIONS

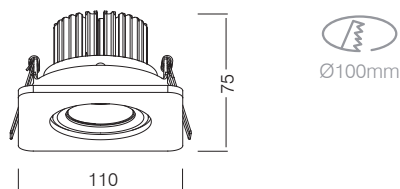

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check CLOWN FISH series please see page 011.

IP20

bridgelux

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6560-1 640Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	80	80	


OTHER ITEMS FOR CLOWN FISH FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

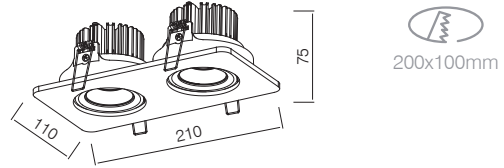

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CLOWN FISH series please see page 011.



ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6560-2 2x640Lm 3000K	2x6.2W	2x8W	BRIDGELUX	AREEK	80	80	

OTHER ITEMS FOR CLOWN FISH FAMILY



RECESSED DOWNLIGHT

DIMENSIONS

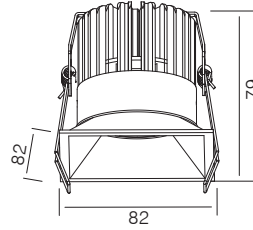

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	35°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 5
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TWINS series please see page 007.

IP20


bridgelux

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6564 750Lm 3000K	8W	10W	BRIDGELUX	AREEK	75	80	


OTHER ITEMS FOR TWINS FAMILY

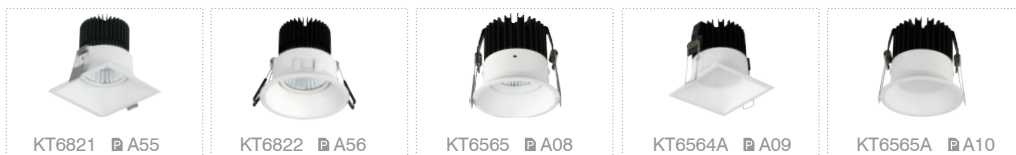

RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	35°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 5
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TWINS series please see page 007.

IP20

bridgelux

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6565 750Lm 3000K	8W	10W	BRIDGELUX	AREEK	75	80	


OTHER ITEMS FOR TWINS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

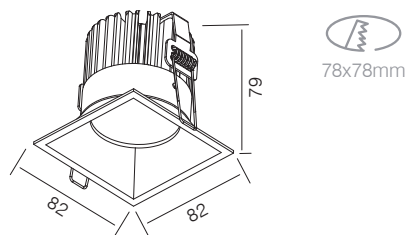

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	8°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 5
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TWINS series please see page 007.

IP20

NICHIA

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6564A 720Lm 3000K	9.5W	12W	NICHIA	AREEK	60	80	

OTHER ITEMS FOR TWINS FAMILY



KT6821 A55

KT6822 A56

KT6564 A07


KT6565 A08

KT6565A A10

RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TWINS series please see page 007.

IP20

NICHIA

AREEK

ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6565A 720Lm 3000K	9.5W	12W	NICHIA	AREEK	60	80	

OTHER ITEMS FOR TWINS FAMILY



RECESSED DOWNLIGHT

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	18° / 30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check SNAIL series please see page 037.

IP20

BRIDGELUX

CITIZEN

AREEK

TRIDONIC
The light is your idea.

OSRAM

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6566 2625Lm 3000K	30W	35W	BRIDGELUX	AREEK	75	80	17


OTHER ITEMS FOR SNAIL FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V
	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CUTTLEFISH series please see page 018.

IP20

bridgelux.

AREEK

ITEM SPECIFICATIONS



Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6577 750lm 3000K	8W	10W	BRIDGELUX	AREEK	75	80	

OTHER ITEMS FOR CUTTLEFISH FAMILY



RECESSED DOWNLIGHT

DIMENSIONS

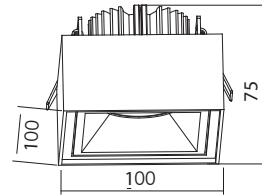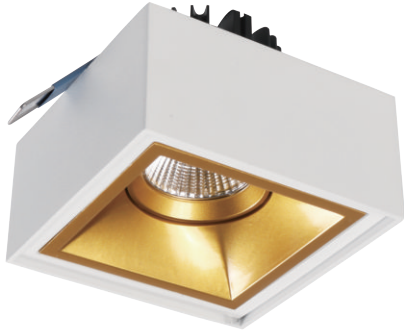

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V
	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CUTTLEFISH series please see page 018.

IP20



AREEK

www.ketaitighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6578 750Lm 3000K	8W	10W	BRIDGELUX	AREEK	75	80	

OTHER ITEMS FOR CUTTLEFISH FAMILY



KT6578 A13


XD2019 C05

XD2020 C06

RECESSED DOWNLIGHT



DIMENSIONS

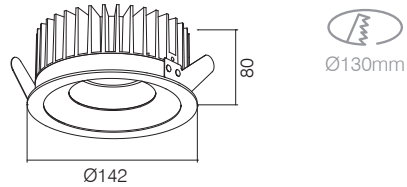

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-230V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CHANGE MODULE series please see page 005.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6583-1 2000Lm 3000K	21W	25W	CITIZEN	AREEK	80	80	17


OTHER ITEMS FOR CHANGE MODULE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

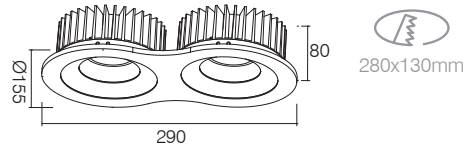

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CHANGE MODULE series please see page 005.

IP20

CITIZEN

TRIDONIC
TRIDONIC OPTICS

OSRAM

AREEK

ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6583-2 2x2000Lm 3000K	2x21W	2x25W	CITIZEN	AREEK	80	80	17

OTHER ITEMS FOR CHANGE MODULE FAMILY



RECESSED DOWNLIGHT

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CHANGE MODULE series please see page 005.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6584-1 2000Lm 3000K	21W	25W	CITIZEN	AREEK	80	80	17


OTHER ITEMS FOR CUTTLEFISH FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

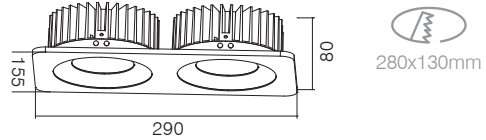

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CHANGE MODULE series please see page 005.

IP20

CITIZEN

TRIDONIC
LED technology for you

OSRAM

AREEK

www.ketaitighting.com

ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6584-2 2x2000Lm 3000K	2x21W	2x25W	CITIZEN	AREEK	80	80	17

OTHER ITEMS FOR CHANGE MODULE FAMILY



RECESSED DOWNLIGHT

DIMENSIONS

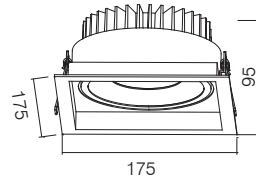

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CHANGE MODULE series please see page 005.



ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6585-1 2000Lm 3000K	21W	25W	CITIZEN	AREEK	80	80	17

OTHER ITEMS FOR CHANGE MODULE FAMILY



RECESSED DOWNLIGHT

DIMENSIONS

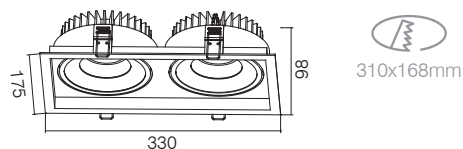

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CHANGE MODULE series please see page 005.

IP20

CITIZEN

TRIDONIC

OSRAM

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6585-2 2x2000Lm 3000K	2x21W	2x25W	CITIZEN	AREEK	80	80	17


OTHER ITEMS FOR CHANGE MODULE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

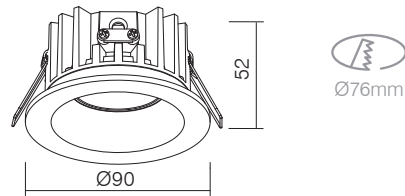

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check RETROFIT DOWNLIGHTS series please see page 013.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6594 825Lm 3000K	8.5W	11W	BRIDGELUX	AREEK	75	80	14.1


OTHER ITEMS FOR RETROFIT DOWNLIGHTS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

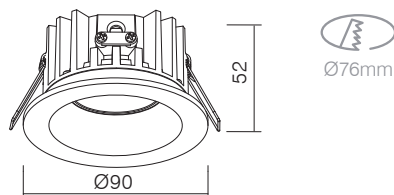

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP65
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check RETROFIT DOWNLIGHTS series please see page 013.

IP65

bridgelux

TRIDONIC
The intelligent choice

OSRAM

HEB
power for light™

AREEK

www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6594A 640Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	80	80	

OTHER ITEMS FOR RETROFIT DOWNLIGHTS FAMILY




KT6594 A20

KT6596 A23

KT6596A A24

RECESSED DOWNLIGHT

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP44
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CLOWN FISH series please see page 011.

IP44

bridgelux

AREEK


ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6595 640Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	80	80	


OTHER ITEMS FOR CLOWN FISH FAMILY



RECESSED DOWNLIGHT

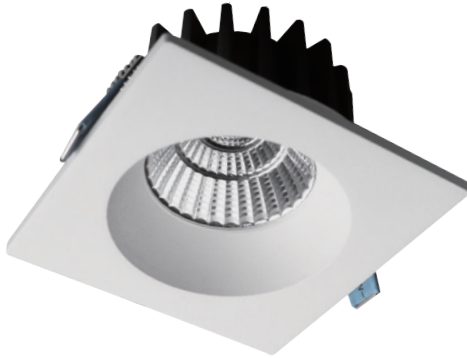

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check RETROFIT DOWNLIGHTS series please see page 013.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6594 640Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	80	80	14.1


OTHER ITEMS FOR RETROFIT DOWNLIGHTS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP65
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check RETROFIT DOWNLIGHTS series please see page 013.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6596A LV 810Lm 3000K	11W	11W	BRIDGELUX	AREEK	74	80	


OTHER ITEMS FOR RETROFIT DOWNLIGHTS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

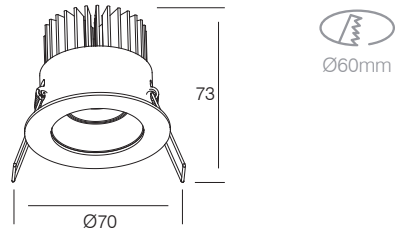

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check COUPLE series please see page 009.

IP20

bridgelux.

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6598 700Lm 3000K	8W	10W	BRIDGELUX	AREEK	70	80	<19


OTHER ITEMS FOR COUPLE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V


This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check COUPLE series please see page 009.



ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6599 700Lm 3000K	8W	10W	BRIDGELUX	AREEK	70	80	<19

OTHER ITEMS FOR COUPLE FAMILY



RECESSED DOWNLIGHT

DIMENSIONS

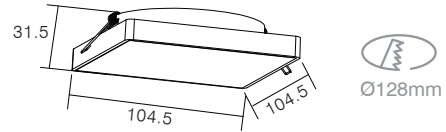

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 24° / 36°
Fixture material	Housing: Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MULTIS SQUARE series please see page 029.

IP20

CITIZEN

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6539 1080Lm 3000K	11W	12W	CITIZEN	AREEK	90	80	19

OTHER ITEMS FOR MULTIS SQUARE FAMILY



MHT8846 B15

KD2957 A32

XD2150 C28


SL386 D14

WL610 E12

RECESSED DOWNLIGHT



DIMENSIONS

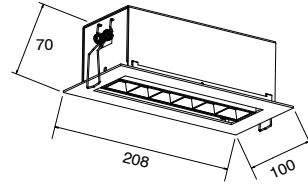

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	48°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MULTIPLE LIGHTS MODULAR series please see page 029.

IP20

www.ketaitighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6630 714Lm 3000K	14W	17W	SMD 3535		42	80	<19


OTHER ITEMS FOR MULTIPLE LIGHTS MODULAR FAMILY

KF1053 D03	KF1055 D05	KF1044 D04	KT6930 A66
KT6968 A60	XD2115 C19	XD2120 C20	MHT8843 B13

RECESSED DOWNLIGHT



DIMENSIONS



	D X H	Cutout
KT6631	Ø115x67mm	Ø100mm
KT6632	Ø135x80mm	Ø120mm
KT6633	Ø160x85mm	Ø145mm
KT6634	Ø 201x 93mm	Ø185mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 24° / 38° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CLAMP series please see page 015.

IP20

CITIZEN

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6631 800Lm 3000K	8W	10W	CITIZEN	AREEK	80	80	
KT6632 1600Lm 3000K	16.5W	20W	CITIZEN	AREEK	80	80	
KT6633 2100Lm 3000K	25.5W	30W	CITIZEN	AREEK	70	80	
KT6634 3200Lm 3000K	34W	40W	CITIZEN	AREEK	80	80	


OTHER ITEMS FOR CLAMP FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



	D X H	Cutout
KT6664	Ø115x66mm	Ø100mm
KT6653	Ø135x80mm	Ø120mm
KT6654	Ø160x85mm	Ø145mm
KT6655	Ø 200x93mm	Ø185mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	100°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check CLAMP series please see page 015.

IP20

CITIZEN

AREEK

www.ketailighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6664 490Lm 3000K	5.4W	7W	SMD 3030	AREEK	70	80	
KT6653 1050Lm 3000K	12.5W	15W	SMD 3030	AREEK	70	80	
KT6654 1650Lm 3000K	18W	22W	SMD 3030	AREEK	75	80	
KT6655 3000Lm 3000K	36W	40W	SMD 3030	AREEK	75	80	


OTHER ITEMS FOR CLAMP FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

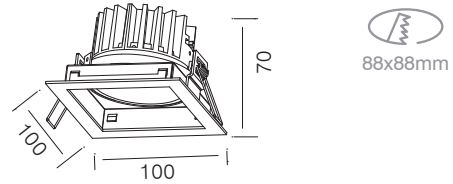

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SARDINE series please see page 039.




ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6648-1 640Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	80	80	


OTHER ITEMS FOR SARDINE FAMILY



RECESSED DOWNLIGHT

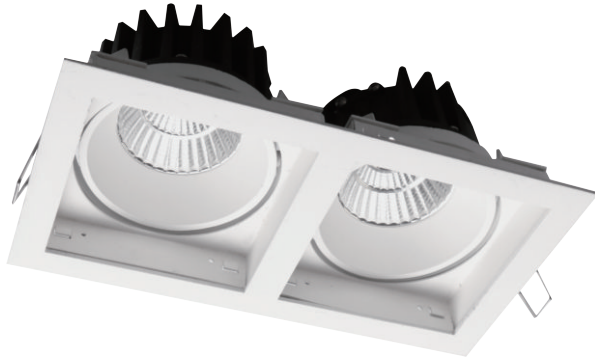

DIMENSIONS

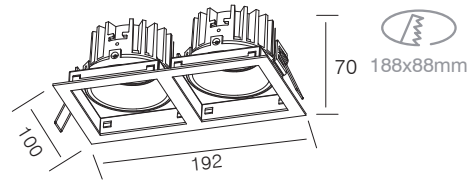

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SARDINE series please see page 039.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6648-2 2x640Lm 3000K	2x6.2W	2x8W	BRIDGELUX	AREEK	80	80	


OTHER ITEMS FOR SARDINE FAMILY



www.ketailighting.com

RECESSED DOWNLIGHT

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SARDINE series please see page 039.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6659-1 640Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	80	80	


OTHER ITEMS FOR SARDINE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

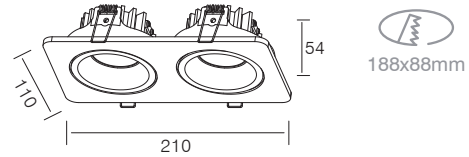

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SARDINE series please see page 039.

IP20

BRIDGELUX

TRIDONIC

OSRAM

OSRAM
HEP
OSRAM FOR LIGHT™

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6659-2 2x640Lm 3000K	2x6.2W	2x8W	BRIDGELUX	AREEK	80	80	


OTHER ITEMS FOR SARDINE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

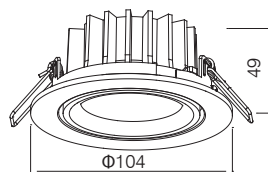

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SARDINE series please see page 039.



www.ketalighting.com


ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6636 560Lm 3000K	11W	8W	BRIDGELUX	AREEK	70	80	


OTHER ITEMS FOR SARDINE FAMILY



RECESSED DOWNLIGHT

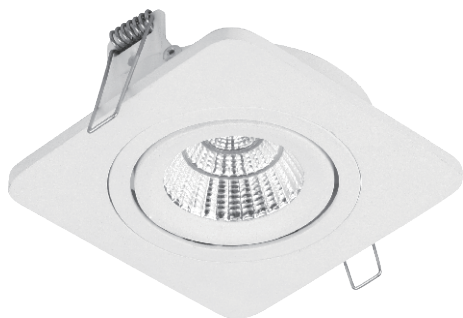

DIMENSIONS

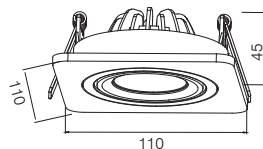

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check NASSARIUS series please see page 010.



ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6662 720Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	90	80	

OTHER ITEMS FOR NASSARIUS FAMILY



RECESSED DOWNLIGHT

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	25°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V


This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check DRUM series please see page 020.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6679-1 3150Lm 3000K	46W	45W	CITIZEN	AREEK	70	80	


OTHER ITEMS FOR DRUM FAMILY

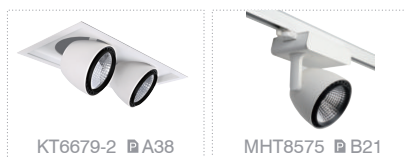

RECESSED DOWNLIGHT



DIMENSIONS

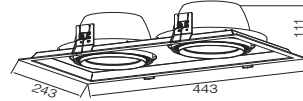

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	25°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check DRUM series please see page 032.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6679-2 2x3150Lm 3000K	2x39W	2x45W	CITIZEN	AREEK	70	80	


OTHER ITEMS FOR DRUM FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 25°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CONE series please see page 048.

IP20

CITIZEN

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6696 3400Lm 3000K	34W	40W	CITIZEN	AREEK	85	80	

OTHER ITEMS FOR CONE FAMILY



KT6697 A40

KT6698 A41


XD2048 C12

MHT8583 B20

RECESSED DOWNLIGHT



DIMENSIONS

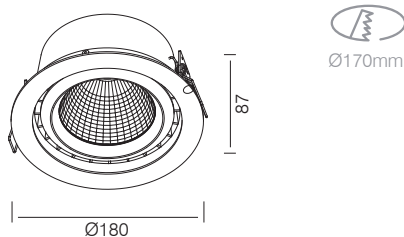

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 25°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CONE series please see page 048.

IP20

CITIZEN

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6697 3400Lm 3000K	35W	40W	CITIZEN	AREEK	85	80	


OTHER ITEMS FOR CONE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

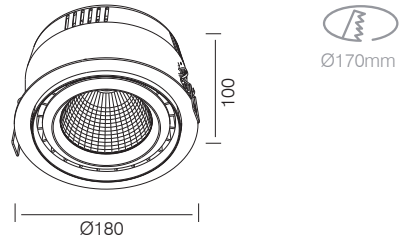

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 25°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CONE series please see page 048.

IP20

CITIZEN

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6698 3400Lm 3000K	35W	40W	CITIZEN	AREEK	85	80	


OTHER ITEMS CONE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



	D X H	Cutout
KT6756	Ø85x70mm	Ø75mm
KT6757	Ø107x85mm	Ø95mm
KT6758	Ø135x98mm	Ø115mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	
	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check PORTO series please see page 003.

IP20

LUMILEDS

TRIDONIC

OSRAM

b.g.



www.ketailighting.com


ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6756 592Lm 3000K	10W	10W	LUMILEDS	TRIDONIC	59	80	29
KT6757 1212Lm 3000K	20W	21W	LUMILEDS	TRIDONIC	61	80	26
KT6758 2016Lm 3000K	30W	36W	LUMILEDS	TRIDONIC	67	80	24

RECESSED DOWNLIGHT



DIMENSIONS



	D X H	Cutout
KT6759	Ø115x66mm	Ø105mm
KT6761	Ø139x78mm	Ø125mm
KT6763	Ø160x85mm	Ø145mm
KT6765	Ø195x95mm	Ø180mm
KT6767	Ø230x100mm	Ø215mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check ABRAS series please see page 001.




ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6759 506Lm 3000K	10W	11W	LUMILEDS	TRIDONIC	46	80	21
KT6761 1452Lm 3000K	20W	22W	LUMILEDS	TRIDONIC	66	80	21
KT6763 1620Lm 3000K	28W	30W	LUMILEDS	TRIDONIC	54	80	24
KT6765 2560Lm 3000K	35W	40W	LUMILEDS	TRIDONIC	64	80	24
KT6767 3416Lm 3000K	50W	56W	LUMILEDS	TRIDONIC	61	80	23

RECESSED DOWNLIGHT



DIMENSIONS



	D1 x D2 x H	Cutout
KT6760	115x115x63mm	105x105mm
KT6762	140x140x75mm	125x125mm
KT6764	160x160x81mm	145x145mm
KT6766	195x195x96mm	170x170mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Housing: Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check HUZAR series please see page 002.

IP20

LUMILEDS

TRIDONIC

OSRAM

bag.




ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6760 770Lm 3000K	10W	11W	LUMILEDS	TRIDONIC	70	80	22
KT6762 1430Lm 3000K	20W	22W	LUMILEDS	TRIDONIC	65	80	21
KT6764 2220Lm 3000K	28W	30W	LUMILEDS	TRIDONIC	74	80	23
KT6766 2840Lm 3000K	38W	40W	LUMILEDS	TRIDONIC	71	80	23

RECESSED DOWNLIGHT

DIMENSIONS

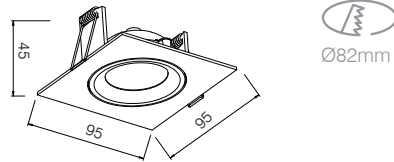

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check IBIS series please see page 033.

IP20

bridgelux.

AREEK

www.ketaitighting.com

ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6967 640Lm 3000K	6.2W	8W	BRIDGELUX	AREEK	80	80	

OTHER ITEMS FOR IBIS FAMILY



RECESSED DOWNLIGHT

DIMENSIONS

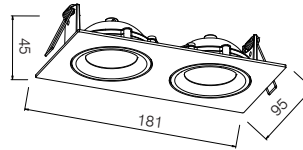

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check IBIS series please see page 033.

IP20



ITEM SPECIFICATIONS

	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6967-2 2x600Lm 3000K	2x6.2W	2x8W	BRIDGELUX	AREEK	75	80	

OTHER ITEMS FOR IBIS FAMILY




www.ketailighting.com

RECESSED DOWNLIGHT



DIMENSIONS



	D X H	Cutout
KT6979	Ø100x54mm	Ø75mm
KT6980	Ø120x63mm	Ø95mm
KT6981	Ø140x73mm	Ø115mm
KT6982	Ø160x75mm	Ø135mm
KT6983	Ø180x90mm	Ø150mm
KT6984	Ø220x110mm	Ø185mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check BROWN HAT series please see page 017.

IP20

AREEK


ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6979 560Lm 3000K	5.4W	7W	EPISTAR	AREEK	80	80	
KT6980 850Lm 3000K	8W	10W	EPISTAR	AREEK	85	80	
KT6981 1275Lm 3000K	12W	15W	EPISTAR	AREEK	85	80	
KT6982 1800Lm 3000K	18W	20W	EPISTAR	AREEK	90	80	
KT6983 2700Lm 3000K	26W	30W	EPISTAR	AREEK	90	80	
KT6984 3600Lm 3000K	35W	40W	EPISTAR	AREEK	90	80	

RECESSED DOWNLIGHT



DIMENSIONS



	D X H
KT6985	Ø96x135mm
KT6985-1	Ø110x139mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° - 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check ZOOMER series please see page 023.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6985 300-600Lm 3000K	12.5W	15W	CREE	AREEK	20-40	80	
KT6985-1 1050-2250Lm 3000K	25.5W	30W	CITIZEN	AREEK	35-75	80	


OTHER ITEMS FOR ZOOMER FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

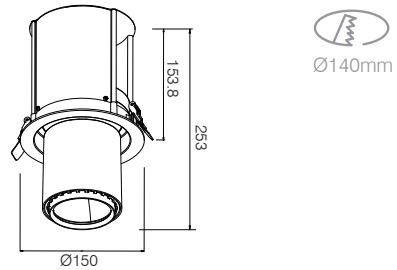

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	18° / 26° / 38° / 55°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TAURUS series please see page 004.

IP20 **CITIZEN**
AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6986 2880Lm 3000K	27W	32W	CITIZEN	AREEK	90	80	


OTHER ITEMS FOR TAURUS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

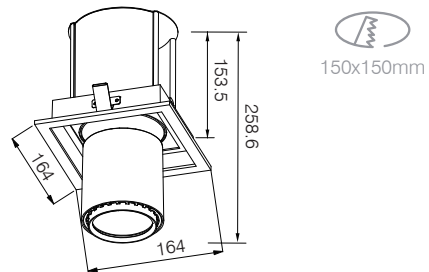

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	18° / 26° / 38° / 55°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TAURUS series please see page 004.

IP20

CREE

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6987 2880Lm 3000K	27W	32W	CREE	AREEK	90	80	


OTHER ITEMS FOR TAURUS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

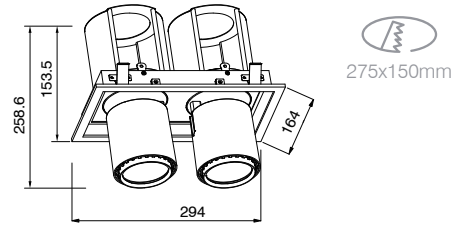

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	18° / 26° / 38° / 55°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TAURUS series please see page 004.

IP20

CREE

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6988 2x2880Lm 3000K	56W	64W	CREE	AREEK	90	80	

OTHER ITEMS FOR TAURUS FAMILY




KT6986 A49

KT6987 A50

RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	Lens 4° Reflector 25° / 38° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check EXTREM NARROW BEAM ANGLE series please see page 027.

IP20

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6989 640Lm 3000K	6.2W	8W			80	80	
KT6989A 680Lm 3000K	6.2W	8W			85	80	


OTHER ITEMS FOR EXTREM NARROW BEAM ANGLE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	Lens 4° Reflector 25°/ 38°/ 60°
Fixture material	Die cast aluminium
Environment	outdoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check EXTREM NARROW BEAM ANGLE series please see page 027.

IP20

CREE

CITIZEN



AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6990 640Lm 3000K	6.2W	8W	CREE	HEP	80	80	19
KT6990A 680Lm 3000K	6.2W	8W	CITIZEN	AREEK	85	80	19


OTHER ITEMS FOR EXTREM NARROW BEAM ANGLE FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

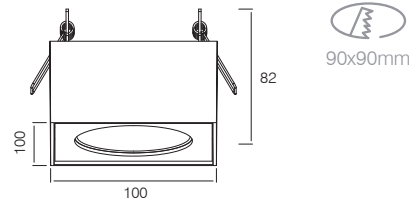

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SQUARE series please see page 014.



ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6808B 1360Lm 3000K	11.2W	14W	BRIDGELUX	AREEK	85	80	17

www.ketailighting.com

RECESSED DOWNLIGHT



DIMENSIONS

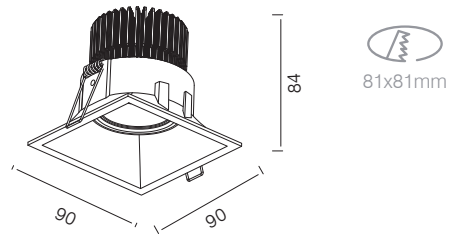

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	35°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TWINS series please see page 007.

IP20

bridgelux


AREEK

www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6821 700Lm 3000K	8W	10W	BRIDGELUX	AREEK	70	80	


OTHER ITEMS FOR TWINS FAMILY

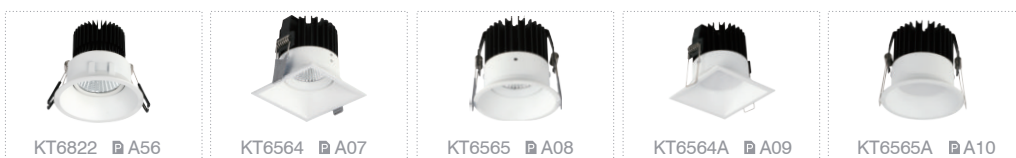

RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	35°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check TWINS series please see page 007.

IP20




AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6822 700Lm 3000K	8W	10W	BRIDGELUX	AREEK	70	80	


OTHER ITEMS FOR TWINS FAMILY

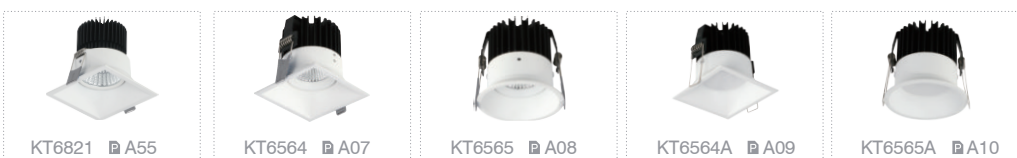

RECESSED DOWNLIGHT



DIMENSIONS

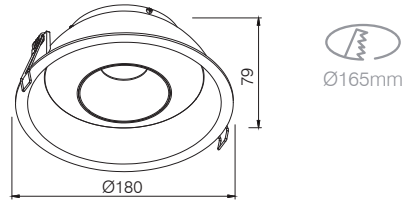

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 25° / 38° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check BOWL series please see page 043.

IP20

CITIZEN

AREEK

www.ketaitighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6826 1120Lm 3000K	12.8W	16W	EPISTAR	AREEK	70	80	
KT6826 1200Lm 3000K	12.8W	16W	CITIZEN	AREEK	75	80	

OTHER ITEMS FOR BOWLS FAMILY



KT6827 A58


XD2077-1 C15

XD2077-2 C16

RECESSED DOWNLIGHT



DIMENSIONS

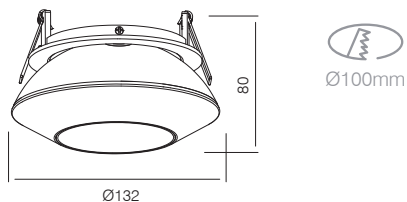

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 25° / 38° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check BOWL series please see page 043.

IP20

CITIZEN

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6827 1040Lm 3000K	12.8W	16W	EPISTAR	AREEK	65	80	
KT6827 1200Lm 3000K	12.8W	16W	CITIZEN	AREEK	75	80	


OTHER ITEMS FOR BOWLS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	35°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	I
Input	220-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check TRUE LED FIRE RATED DOWNLIGHTS series please see page 016.

IP20

LUMENS




ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6830 600Lm 3000K	6.2W	8W	LUMENS		75	80	

RECESSED DOWNLIGHT



DIMENSIONS

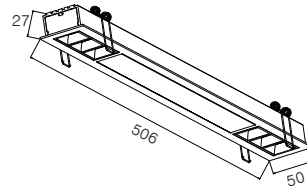

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30° / 100°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V


This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MULTIPLE LIGHTS MODULAR series please see page 025.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6968 1250Lm 3000K	21W	25W	CREE+SMD	AREEK	50	80	


OTHER ITEMS FOR MULTIPLE LIGHTS MODULAR FAMILY

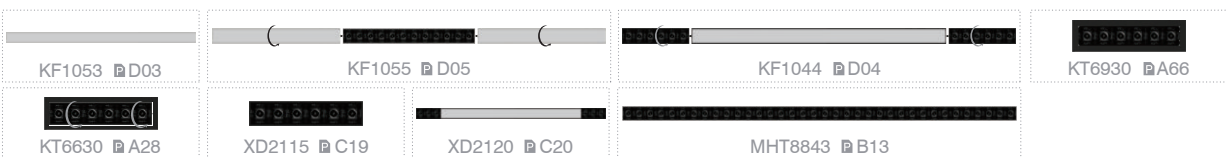

RECESSED DOWNLIGHT



DIMENSIONS




SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15°/ 24°/38°
Fixture material	Housing: Die cast aluminium
Environment	Indoor
	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
	Input

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check LESS series please see page 019.

IP20 **CITIZEN**
TRIDONIC **AREEK**

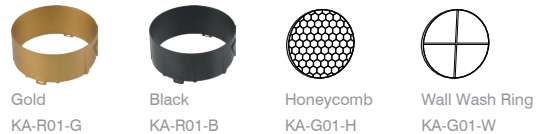

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6957 900Lm 3000K	12.5W	15W	EPISTAR	AREEK	60	80	
KT6957 1050Lm 3000K	12.5W	15W	CITIZEN	TRIDONIC	70	80	
KT6957 1200Lm 3000K	17W	20W	EPISTAR	AREEK	60	80	
KT6957 1400Lm 3000K	17W	20W	CITIZEN	TRIDONIC	70	80	


OTHER ITEMS FOR LESS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15°/ 24°/38°
Fixture material	Die cast aluminium
Environment	Indoor IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check LESS series please see page 019.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6958 1500Lm 3000K	21W	25W	EPISTAR	AREEK	60	80	
KT6958 1750Lm 3000K	21W	25W	CITIZEN	TRIDONIC	70	80	
KT6958 1800Lm 3000K	26W	30W	EPISTAR	AREEK	60	80	
KT6958 2100Lm 3000K	26W	30W	CITIZEN	TRIDONIC	70	80	


OTHER ITEMS FOR LESS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

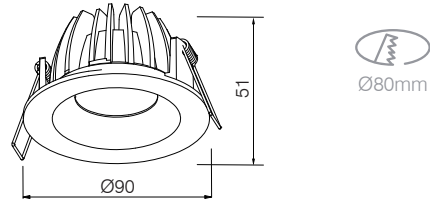

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	28°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CUP series please see page 035.

IP20

CITIZEN

CREE

brigeLux

TRIDONIC

AREEK

www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6913 630Lm 3000K	5.4W	7W	EPISTAR	AREEK	90	80	


OTHER ITEMS FOR CUP FAMILY



RECESSED DOWNLIGHT



DIMENSIONS

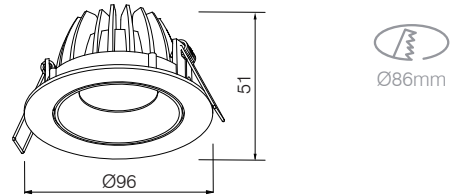

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	28°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CUP series please see page 035.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6914 630lm 3000K	5.4W	7W	EPISTAR	AREEK	90	80	

OTHER ITEMS FOR CUP FAMILY




www.ketailighting.com

RECESSED DOWNLIGHT



DIMENSIONS

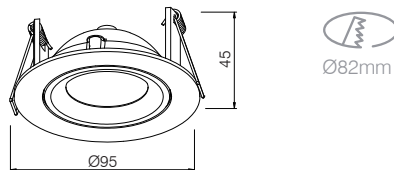

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check IBIS series please see page 033.

IP20

bridgelux.


AREEK

www.ketalighting.com


ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6915 640Lm 3000K	8W	8W	BRIDGELUX	AREEK	80	80	


OTHER ITEMS FOR IBIS FAMILY

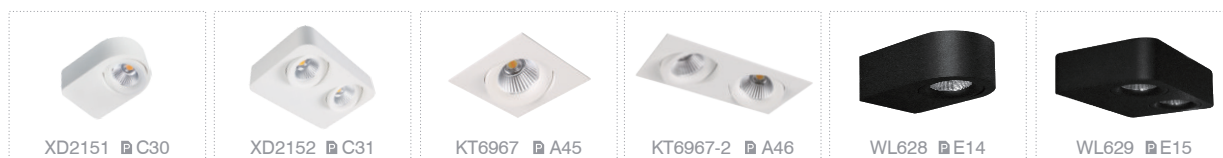

RECESSED DOWNLIGHT

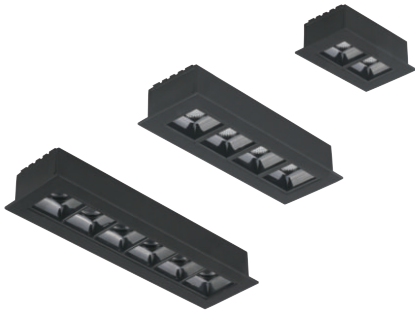

DIMENSIONS



	L X W X H	Cutout
KT6925	50x50x27mm	46x44mm
KT6926	80x50x37mm	46x74mm
KT6927	110x50x35mm	46x104mm
KT6928	140x50x35mm	46x134mm
KT6929	170x50x35mm	46x164mm
KT6930	180x50x35mm	46x174mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	12°/ 24°/ 36°/ 48°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 5
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check MULTIPLE LIGHTS MODULAR series please see page 025.

IP20

CREE

AREEK

ITEM SPECIFICATIONS


Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6925 150Lm 3000K	2W	3W	SMD 3535	AREEK	50	80	
KT6926 250Lm 3000K	3.8W	5W	SMD 3535	AREEK	50	80	
KT6927 350Lm 3000K	5.5W	7W	SMD 3535	AREEK	50	80	
KT6928 600Lm 3000K	9.5W	12W	SMD 3535	AREEK	50	80	
KT6929 700Lm 3000K	11W	14W	SMD 3535	AREEK	50	80	
KT6930 850Lm 3000K	14W	17W	SMD 3535	AREEK	50	80	

OTHER ITEMS FOR MULTIPLE LIGHTS MODULAR FAMILY

KF1053 D03	KF1055 D05	KF1044 D04	KT6630 A28
KT6968 A60	XD2115 C19	XD2120 C20	MHT8843 B13

RECESSED DOWNLIGHT

DIMENSIONS

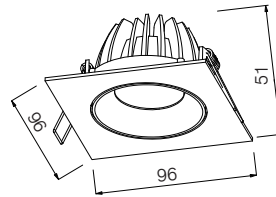

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	28°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CUP series please see page 035.

IP20

CITIZEN

CREE

brigelux

TRIDONIC

AREEK

www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6943 630Lm 3000K	5.4W	7W	EPISTAR	AREEK	90	80	


OTHER ITEMS FOR CUP FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 24° / 38°
Fixture material	Die cast aluminium
Environment	Indoor
	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check LESS series please see page 009.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6955 900Lm 3000K	12.5W	15W	EPISTAR	AREEK	60	80	
KT6955 1050Lm 3000K	12.5W	15W	CITIZEN	TRIDONIC	70	80	
KT6955 1200Lm 3000K	17W	20W	EPISTAR	AREEK	60	80	
KT6955 1400Lm 3000K	17W	20W	CITIZEN	TRIDONIC	70	80	


OTHER ITEMS FOR LESS FAMILY



RECESSED DOWNLIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15°/ 24°/38°
Fixture material	Die cast aluminium
Environment	Indoor IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check LESS series please see page 019.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KT6956 1520Lm 3000K	21W	25W	EPISTAR	AREEK	60	80	
KT6956 1750Lm 3000K	21W	25W	CITIZEN	TRIDONIC	70	80	
KT6956 1800Lm 3000K	26W	30W	EPISTAR	AREEK	60	80	
KT6956 2250Lm 3000K	26W	30W	CITIZEN	TRIDONIC	75	80	

OTHER ITEMS FOR LESS FAMILY

