


TRACK LIGHT



KTK1-8587

HKTA-8587

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MINI TRACK LIGHTING series please see page 053.

IP20



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KTK1-8587 496Lm 3000K	6.2W	8W	BRIDGELUX	HEP	80	80	
HKTA-8587 496Lm 3000K	6.2W	8W	BRIDGELUX	HEP	80	80	


OTHER ITEMS FOR TRACK LIGHTING FAMILY



TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check EYEBALL series please see page 052.



LUMENS

TRIDONIC
TRIDONIC

OSRAM



www.ketailighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8588 496Lm 3000K	6.2W	8W	LUMENS		80	80	


TRACK LIGHT



KTK1-8591

HKTA-8591

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MINI TRACK LIGHTING series please see page 053.

IP20



www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KTK1-8591 496Lm 3000K	6.2W	8W	BRIDGELUX	HEP	80	80	
HKTA-8591 496Lm 3000K	6.2W	8W	BRIDGELUX	HEP	80	80	

OTHER ITEMS FOR TRACK LIGHTING FAMILY




TRACK LIGHT



KTK1-8592

HKTA-8592

DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	30°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MINI TRACK LIGHTING series please see page 033.

IP20




ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KTK1-8592 496Lm 3000K	6.2W	8W	BRIDGELUX	HEP	80	80	
HKTA-8592 496Lm 3000K	6.2W	8W	BRIDGELUX	HEP	80	80	

TRACK LIGHT



DIMENSIONS



	D X H X T
KTK1 8834	Ø90x125x30mm
KTK1 8835	Ø105x140x32mm
KTK1 8836	Ø120x155x33 mm



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	10°/ 20°/ 30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check OSLO series please see page 021.

IP20

www.ketaitighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
KTK1 8834 700Lm 3000K		10W	ZOM		70	80	
KTK1 8835 1050Lm 3000K		15W	ZOM		70	80	
KTK1 8836 1400Lm 3000K		20W	ZOM		70	80	


OTHER ITEMS FOR OSLO FAMILY



TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	18° / 30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SNAIL series please see page 037.

IP20

bridgelux

CITIZEN

AREEK


TRIDONIC

OSRAM

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8554 1750m 3000K	31W	35W	BRIDGELUX	AREEK	80	80	17


OTHER ITEMS FOR SNAIL FAMILY

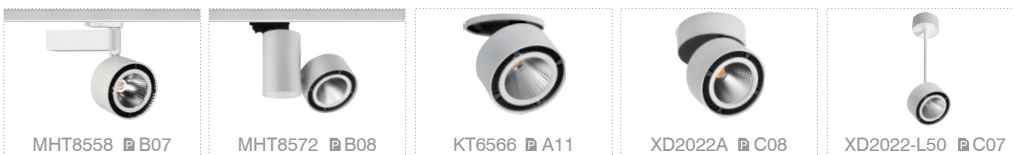

TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	18° / 30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SNAIL series please see page 037.




www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8558 2800Lm 3000K	31W	35W	BRIDGELUX	AREEK	80	80	17


OTHER ITEMS FOR SNAIL FAMILY

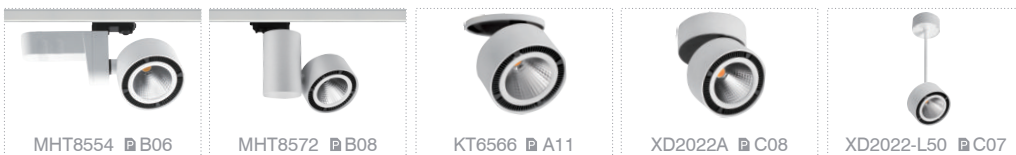

TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	18° / 30°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check SNAIL series please see page 037.



CITIZEN

AREEK

TRIDONIC


OSRAM

www.ketailighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8572 2800Lm 3000K	31W	35W	BRIDGELUX	AREEK	80	80	17


OTHER ITEMS FOR SNAIL FAMILY

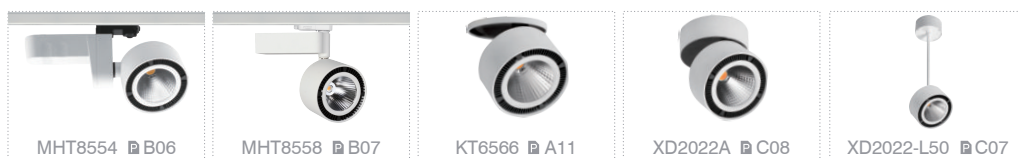

TRACK LIGHT



DIMENSIONS



	D X H
MHT8596A	Ø76x185mm
MHT8596B	Ø76x200mm
MHT8597	Ø86x220mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 38° / 40°
Fixture material	Housing: Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check PIPE series please see page 051.

IP20

LUMENS


ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8596A 1600Lm 3000K	17W	20W	LUMENS		80	80	
MHT8596B 2400Lm 3000K	26W	30W	LUMENS		80	80	
MHT8597 3200Lm 3000K	35W	40W	LUMENS		80	80	

TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 24° / 38°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V
	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check LESS series please see page 019.


IP20 **CITIZEN**
TRIDONIC **AREEK**



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8830 1000Lm 3000K	12.5W	15W	EPISTAR	AREEK	80	80	
MHT8830 1000Lm 3000K	12.5W	15W	CITIZEN	TRIDONIC	80	80	
MHT8830 1600Lm 3000K	17W	20W	EPISTAR	AREEK	80	80	
MHT8830 1600Lm 3000K	17W	20W	CITIZEN	TRIDONIC	80	80	


OTHER ITEMS FOR LESS FAMILY

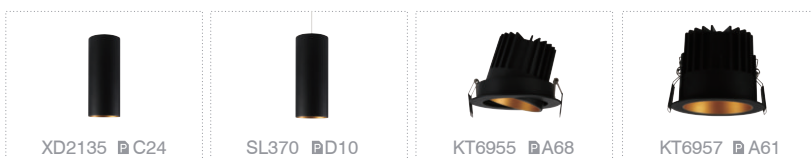

TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	18° / 30° / 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V
	220-240V


This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check LESS series please see page 019.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8831 2000Lm 3000K	21W	25W	EPISTAR	AREEK	80	80	
MHT8831 2000Lm 3000K	21W	25W	CITIZEN	TRIDONIC	80	80	
MHT8831 2400Lm 3000K	26W	30W	EPISTAR	AREEK	80	80	
MHT8831 2400Lm 3000K	26W	30W	CITIZEN	TRIDONIC	80	80	


OTHER ITEMS FOR LESS FAMILY

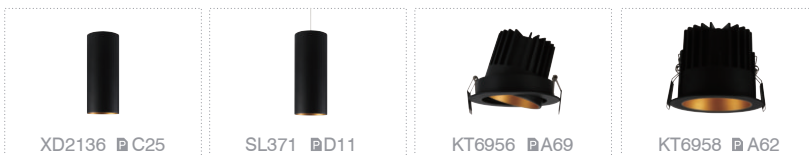

TRACK LIGHT



DIMENSIONS



	D X H
MHT8837	Ø60x261mm
MHT8847	Ø76x290mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	5°- 26° / 15°- 60°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check ZOOMER series please see page 023.

IP20

CREE

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8837 300-600Lm 3000K	12.5W	15W	CREE	AREEK	20-40	80	
MHT8847 1200-2250Lm 3000K	26W	30W	CREE	AREEK	40-75	80	


OTHER ITEMS FOR ZOOMER FAMILY



TRACK LIGHT



DIMENSIONS



	L X H
MHT8840	323x122mm
MHT8842	641x122mm
MHT8843	959x122mm
MHT8843	1277x122mm

SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	12° / 24° / 36° / 48°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check MULTIPLE LIGHTS MODULAR series please see page 025.

IP20

CREE

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8840 1020Lm 3000K	17W	20W	CREE	AREEK	60	80	
MHT8842 2100Lm 3000K	35W	40W	CREE	AREEK	60	80	
MHT8843 3010Lm 3000K	43W	50W	CREE	AREEK	70	80	
MHT8844 4200Lm 3000K	54W	60W	CREE	AREEK	70	80	


OTHER ITEMS FOR MULTIPLE LIGHTS MODULAR FAMILY

KF1053 D03	KF1055 D05	KF1044 D04	KT6930 A66
KT6630 A28	KT6968 A60	XD2115 C19	XD2120 C20

TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	Lens 4° Reflector 25°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check EXTREM NARROW BEAM ANGLE series please see page 027.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8841 560Lm 3000K	6.2W	8W	CREE	AREEK	70	80	19
MHT8841A 960Lm 3000K	9.6W	12W	CITIZEN	AREEK	80	80	19


OTHER ITEMS FOR EXTREM NARROW BEAM ANGLE FAMILY



TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	15° / 24° / 36°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MULTIS SQUARE series please see page 029.

IP20

CITIZEN

AREEK

www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8846 964Lm 3000K	9.6W	12W	CITIZEN	AREEK	90	80	19


OTHER ITEMS FOR MULTIS SQUARE FAMILY



TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	40°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check MULTIS ROUND series please see page 031.

IP20

CITIZEN

AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8848 864Lm 3000K	9.6W	12W	CITIZEN	GLOBAL	90	80	


OTHER ITEMS FOR MULTIS ROUND FAMILY



TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	21°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check FARGO FAMILY series please see page 049.

IP20



www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHTA8849 321Lm 3000K	9W	10W	BRIDGELUX-COB	TRACK	32	80	

OTHER ITEMS FOR FARGO FAMILY FAMILY




MHTA8841A B18

MHTA8830 B19

TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	21.5°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V


This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check FARGO FAMILY series please see page 049.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHTA8841A 705Lm 3000K	13.5W	15W	BMTC-COB	TRACK	47	80	


OTHER ITEMS FOR FARGO FAMILY FAMILY

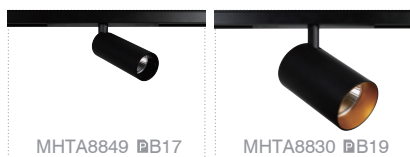

TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	22°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	220-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check FARGO FAMILY series please see page 049.




www.ketalighting.com

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHTA8830 1495Lm 3000K	22.5W	25W	BMTC-COB	TRACK	59.8	80	

OTHER ITEMS FOR FARGO FAMILY FAMILY

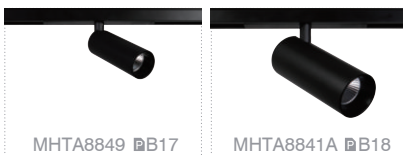


MHTA8849 B17

MHTA8841A B18

TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	24°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.
Check CONE series please see page 048.

IP20 **CITIZEN**
AREEK

ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8583 3200Lm 3000K	38W	40W	CITIZEN	AREEK	80	80	


OTHER ITEMS FOR CONE FAMILY



TRACK LIGHT



DIMENSIONS



SPECIFICATIONS

Colour (s)	Matt white RAL 9016
	Matt grey RAL 9006
	Matt black RAL 9005
Beam angle	12°
Fixture material	Die cast aluminium
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Colour consistency (SDCM)	MacAdam step 3
Warranty	3 years / 5 years
Safety Class	II
Input	100-240V

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Check DRUM series please see page 020.



ITEM SPECIFICATIONS

Description	LED Power	Total Power	LEDs	Driver	Lm/W	CRI (typ.)	UGR
MHT8575 3400Lm 3000K	46W	47W	CITIZEN	OSRAM	72	80	

OTHER ITEMS FOR DRUM FAMILY



