

SURFACE MOUNTED LIGHT



LED 220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
XD2077-1	16	1050	3000K	25°	80

BOWL FAMILY - TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION **Brigelux**

DRIVER OPTION **AREEK / LIFUD / TRIDONIC**

TECH. DRAWING size in mm

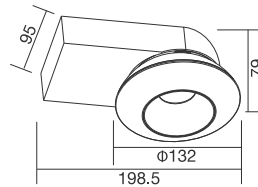

LED 220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
XD2077-2	2x16	2x1050	3000K	25°	80

BOWL FAMILY - TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION **Brigelux**

DRIVER OPTION **AREEK / LIFUD / TRIDONIC**

TECH. DRAWING size in mm

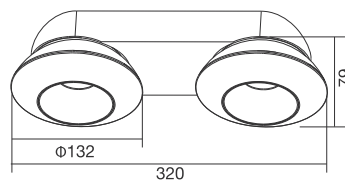


SURFACE MOUNTED LIGHT



OLSO FAMILY FIXED CEILING LIGHT

TECH. DRAWING



OLSO FAMILY

LED  AC 220-240 V IP20 ZMO


	W	LUM	CCT	BEAM	CRI	DIA	H
XD2131	10	650	3000K	30°	80	Φ90mm	30mm
XD2187	15	950	3000K	30°	80	Φ105mm	32mm
XD2188	20	1200	3000K	30°	80	Φ120mm	33mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 10° 20° 30°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION	LUMENS
DRIVER OPTION	/

REFERENCE DRAWING

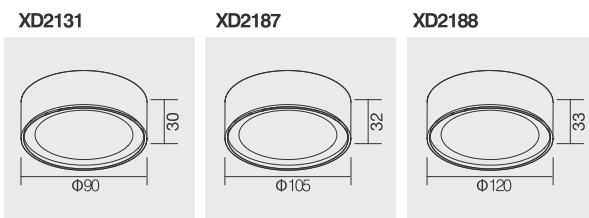

SURFACE MOUNTED LIGHT



LESS FAMILY FIXED CEILING LIGHT

TECH. DRAWING



LESS FAMILY

LED  220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI	DIA	H
XD2135	20	1400	3000K	38°	80	Φ76mm	190mm
XD2136	30	2100	3000K	30°	80	Φ89mm	210mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle XD2135 15° 24° 38°
 Beam Angle XD2136 18° 30°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION


EVERCORE / Bridgelux

DRIVER OPTION


TRIDONIC / LIFUD / AREEK

REFERENCE DRAWING

XD2135



XD2136



SURFACE MOUNTED LIGHT



IBIS FAMILY - 360° GIMBAL

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38° <input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION Bridgelux / EVERCORE

DRIVER OPTION AREEK / AcTEC / KEGU

LED  220-240 V IP20 CITIZEN HEP

	W	LUM	CCT	BEAM	CRI
XD2224	8	800	3000K	38°	80

TECH. DRAWING size in mm



IBIS FAMILY - 360° GIMBAL

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38° <input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION Bridgelux / EVERCORE

DRIVER OPTION AREEK / AcTEC / KEGU

LED  220-240 V IP20 CITIZEN HEP

	W	LUM	CCT	BEAM	CRI
XD2224-2	2x8	2x800	3000K	38°	80

TECH. DRAWING size in mm

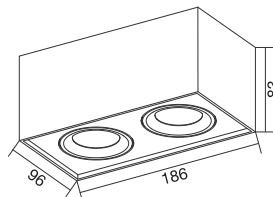

SURFACE MOUNTED LIGHT



LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
XD2139	8	550	3000K	20°	80

ROBOT FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **EVERCORE**

DRIVER OPTION **TRIDONIC / OSRAM / KEGU**

TECH. DRAWING size in mm



LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
XD2142	2x8	2x550	3000K	20°	80

ROBOT FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **EVERCORE**

DRIVER OPTION **TRIDONIC / OSRAM / KEGU**

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
XD2143	3x8	3x550	3000K	20°	80

ROBOT FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION EVERCORE

DRIVER OPTION TRIDONIC / OSRAM / KEGU

TECH. DRAWING size in mm

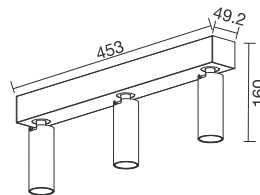

LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
XD2144	4x8	4x550	3000K	20°	80

ROBOT FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION EVERCORE

DRIVER OPTION TRIDONIC / OSRAM / KEGU

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



LED  100-240 V  IP20  Bridgelux  AREEK

	W	LUM	CCT	BEAM	CRI
XD2230	8	550	3000K	20°	80

ROBOT FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **EVERCORE**

DRIVER OPTION **TRIDONIC / OSRAM / KEGU**

TECH. DRAWING size in mm



LED  100-240 V  IP20  Bridgelux  AREEK

	W	LUM	CCT	BEAM	CRI
XD2231	2x8	2x550	3000K	20°	80

ROBOT FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **EVERCORE**

DRIVER OPTION **TRIDONIC / OSRAM / KEGU**

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
XD2232	3x8	3x550	3000K	20°	80

ROBOT FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **EVERCORE**

DRIVER OPTION **TRIDONIC / OSRAM / KEGU**

TECH. DRAWING size in mm

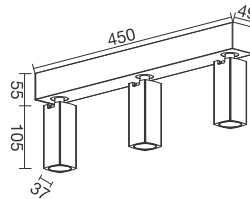

LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
XD2133	4x8	4x550	3000K	20°	80

ROBOT FAMILY- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION **EVERCORE**

DRIVER OPTION **TRIDONIC / OSRAM / KEGU**

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



LED  220-240 V IP20 Bridgelux OSRAM

	W	LUM	CCT	BEAM	CRI
XD2228	2x8	2x424	3000K	20°	80

XD2228- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angel	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION /

DRIVER OPTION /

TECH. DRAWING size in mm



LED  220-240 V IP20 Bridgelux OSRAM

	W	LUM	CCT	BEAM	CRI
XD2229	8	424	3000K	20°	80

XD2229- TILTABLE & ROTATABLE


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
CCT	<input type="radio"/> 20°	<input type="radio"/> 40°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION /

DRIVER OPTIONS /

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



LED  100-240 V IP65 CREE AREEK

	W	LUM	CCT	BEAM	CRI
XD2145	8	560	3000K	4°	80

EXTREM NARROW BEAM ANGLE TILTABLE & ROTATABLE CEILING LIGHT


OPTIONS

IP Rating	<input type="radio"/> IP20	<input type="radio"/> IP65	
Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION /

DRIVER OPTION HEP / KEGU

TECH. DRAWING size in mm



LED  100-240 V IP65 CITIZEN AREEK

	W	LUM	CCT	BEAM	CRI
XD2145A	12	600	3000K	25°	80

EXTREM NARROW BEAM ANGLE TILTABLE & ROTATABLE CEILING LIGHT


OPTIONS

IP Rating	<input type="radio"/> IP20	<input type="radio"/> IP65		
Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION Bridgelux

DRIVER OPTION TRIDONIC / HEP

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



EXTREM NARROW BEAM ANGLE TILTABLE RECESSED DOWNLIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION

/


DRIVER OPTION

HEP / KEGU

LED  100-240 V IP20 CREE AREEK

	W	LUM	CCT	BEAM	CRI
XD2155	8	480	3000K	4°	80

TECH. DRAWING size in mm



EXTREM NARROW BEAM ANGLE TILTABLE RECESSED DOWNLIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION

Bridgelux


DRIVER OPTION

TRIDONIC / HEP

LED  100-240 V IP20 CITIZEN AREEK

	W	LUM	CCT	BEAM	CRI
XD2155A	12	600	3000K	25°	80

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



MULTIS SQUARE FAMILY FIXED CEILING LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION OSRAM

DRIVER OPTION TRIDONIC / LIFUD / AREEK

LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
XD2150	12	1080	3000K	36°	80

TECH. DRAWING size in mm

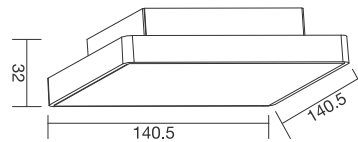

MULTIS ROUND FAMILY FIXED CEILING LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION OSARM

DRIVER OPTION TRIDONIC / LIFUD / AREEK

LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
XD2153	12	1080	3000K	36°	80

TECH. DRAWING size in mm

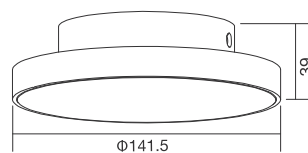

SURFACE MOUNTED LIGHT



LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
XD2151	8	800	3000K	38°	80

IBIS FAMILY - 360° GIMBAL


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION Bridgelux / EVERCORE

DRIVER OPTION AREEK / HEP

TECH. DRAWING size in mm



LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
XD2152	2x8	2x800	3000K	38°	80

IBIS FAMILY - 360° GIMBAL


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005	
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 25°	<input type="radio"/> 38°	<input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K	
CRI	<input type="radio"/> 80	<input type="radio"/> 90		

SOURCE OPTION Bridgelux / EVERCORE

DRIVER OPTION AREEK / HEP

TECH. DRAWING size in mm

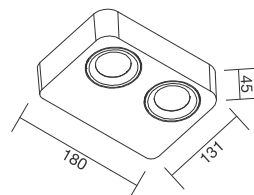

SURFACE MOUNTED LIGHT



MULTIS SQUARE FAMILY TILTABLE & ROTATABLE CEILING LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION

OSRAM

DRIVER OPTION

TRIDONIC / LIFUD / AREEK

LED



220-240 V


IP20

Bridgelux

KEGU

	W	LUM	CCT	BEAM	CRI
XD2157	12	1080	3000K	36°	80

TECH. DRAWING size in mm



MULTIS ROUND FAMILY TILTABLE & ROTATABLE CEILING LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION

OSARM

DRIVER OPTION

TRIDONIC / LIFUD / AREEK

LED



220-240 V


IP20

Bridgelux

KEGU

	W	LUM	CCT	BEAM	CRI
XD2158	12	1080	3000K	36°	80

TECH. DRAWING size in mm




SURFACE MOUNTED LIGHT



ANTORCHA FAMILY FIXED CEILING LIGHT

TECH. DRAWING



ANTORCHA FAMILY

LED  220-240 V IP20 Bridgelux TRIDONIC

	W	LUM	CCT	BEAM	CRI	DIA	H
XD2197	10	700	3000K	20°	80	Φ76mm	150mm
XD2198	20	1400	3000K	20°	80	Φ96mm	150mm
XD2200	30	2100	3000K	20°	80	Φ116mm	150mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 20° 45°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION


CITIZEN

DRIVER OPTION


OSRAM

REFERENCE DRAWING


XD2197



XD2198



XD2200




SURFACE MOUNTED LIGHT



ILUSION FAMILY FIXED CEILING LIGHT

TECH. DRAWING



ILUSION FAMILY

LED  220-240 V IP20 Bridgelux TRIDONIC


	W	LUM	CCT	BEAM	CRI	LxT	H
XD2204	10	700	3000K	20°	80	76x76mm	150mm
XD2199	20	1400	3000K	20°	80	96x96mm	150mm
XD2201	30	2100	3000K	20°	80	116x116mm	150mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 20° 45°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION	CITIZEN
DRIVER OPTION	OSRAM

REFERENCE DRAWING

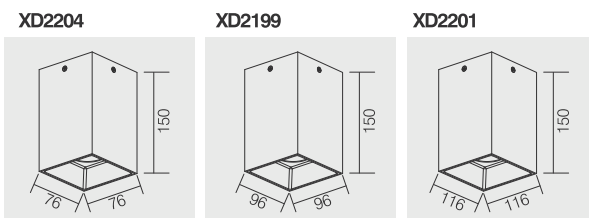


SURFACE MOUNTED LIGHT



PORTO FAMILY FIXED CEILING LIGHT

TECH. DRAWING



PORTO FAMILY

LED  220-240 V  IP20  CITIZEN  OSRAM

	W	LUM	CCT	BEAM	CRI	DIA	H
XD2205	10	600	3000K	80°	80	Φ90mm	120mm
XD2206	20	1200	3000K	80°	80	Φ113mm	146mm
XD2207	30	2100	3000K	80°	80	Φ140mm	166mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION


Brigelux

DRIVER OPTION


KEGU / AREEK

REFERENCE DRAWING


XD2205



XD2206



XD2207




SURFACE MOUNTED LIGHT



ZOOMER FAMILY TILTABLE & ROTATABLE ZOOMER CEILING LIGHT

TECH. DRAWING



ZOOMER FAMILY

LED		100-240 V	IP20	XD2211 Bridgelux	XD2212 CITIZEN	AREEK
-----	--	-----------	------	---------------------	-------------------	-------


	W	LUM	CCT	BEAM	CRI	D1	D2	H1	H2
XD2211	15	360-530	3000K	8-45°	80	Φ60mm	Φ100mm	29mm	244mm
XD2212	30	1150-2250	3000K	18-55°	80	Φ76mm	Φ100mm	29mm	285mm

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

XD2211 SOURCE OPTION	OSRAM
XD2212 SOURCE OPTION	Bridgelux
DRIVER OPTION	OSRAM / TCI / TRIDONIC

REFERENCE DRAWING

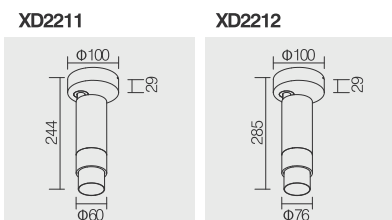


SURFACE MOUNTED LIGHT



ASTREA LENS CHANGEABLE CEILING LIGHT

TECH. DRAWING

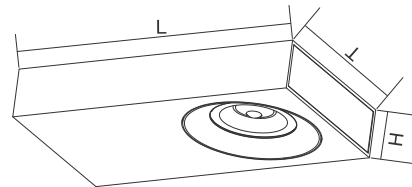

ASTREA FAMILY

LED 220-240 V IP20 CITIZEN TRIDONIC

	W	LUM	CCT	BEAM	CRI	L	T	H
XD2196	15	1200-1400	3000K	/	80	180mm	100mm	30mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION Bridgelux

DRIVER OPTION OSRAM

LENS OPTIONS




SURFACE MOUNTED LIGHT



ASTREA LENS CHANGEABLE CEILING LIGHT

TECH. DRAWING

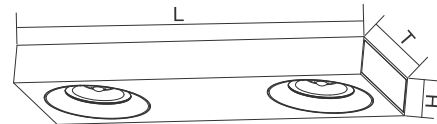

ASTREA FAMILY

LED 220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI	L	T	H
XD2217	2x15	300-1800	3000K	/	80	280mm	100mm	30mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION Bridgelux


DRIVER OPTION /

LENS OPTIONS


RONDA-WAS2-C




RONDA-WAS-C




RONDA-ZT45-C




RONDA-O-C



RONDA-WW-C




RONDA-REC-60-C



RONDA-W-C




RONDA-WWW-C



RONDA-REC-C



RONDA-S-C




SURFACE MOUNTED LIGHT



ASTREA LENS CHANGEABLE CEILING LIGHT

TECH. DRAWING

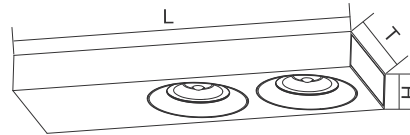

ASTREA FAMILY

LED 220-240 V IP20 CITIZEN OSRAM

	W	LUM	CCT	BEAM	CRI	L	T	H
XD2218	2x15	500-1400	3000K	/	80	280mm	100mm	30mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION Bridgelux


DRIVER OPTION /

LENS OPTIONS


RONDA-WAS2-C




RONDA-WAS-C




RONDA-ZT45-C




RONDA-O-C



RONDA-WW-C




RONDA-REC-60-C



RONDA-W-C




RONDA-WWW-C



RONDA-REC-C



RONDA-S-C



SURFACE MOUNTED LIGHT



XD2021- TILTABLE & ROTATABLE

OPTIONS

- Color ○ RAL 9016 ○ RAL 9006 ○ RAL 9005
- CCT ○ 2700K ○ 3000K ○ 4000K
- CRI ○ 80 ○ 90


SOURCE OPTION /

DRIVER OPTION OSRAM

LED  100-240 V IP20 NICHIA AREEK

	W	LUM	CCT	BEAM	CRI
XD2021	12	850	3000K	50°	80

TECH. DRAWING size in mm



XD2021B- TILTABLE & ROTATABLE

OPTIONS

- Color ○ RAL 9016 ○ RAL 9006 ○ RAL 9005
- Beam Angle ○ 17° ○ 24° ○ 60°
- CCT ○ 2700K ○ 3000K ○ 4000K
- CRI ○ 80 ○ 90


SOURCE OPTION Bridgelux

DRIVER OPTION OSRAM / AREEK

LED  100-240 V IP20 CITIZEN AREEK

	W	LUM	CCT	BEAM	CRI
XD2021B	16	1200	3000K	24°	80

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



LED  220-240 V  IP20  Bridgelux  KEGU

	W	LUM	CCT	BEAM	CRI
XD2022A	26	1800	3000K	18°	80

XD2022A- TILTABLE & ROTATABLE


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION **CITIZEN**

DRIVER OPTION **OSRAM / AREEK**

TECH. DRAWING size in mm



LED  220-240 V  IP20  Bridgelux  HEP

	W	LUM	CCT	BEAM	CRI
XD2104	12	840	3000K	35°	80

XD2104- TILTABLE & ROTATABLE


OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION **CITIZEN**

DRIVER OPTION **OSRAM / AREEK**

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



SARDINE FAMILY - TILTABLE

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION CITIZEN / EVERCORE

DRIVER OPTION AREEK

LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
XD2036-1	8	640	3000K	30°	80

TECH. DRAWING size in mm



SARDINE FAMILY - TILTABLE

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION CITIZEN / EVERCORE

DRIVER OPTION TRIDONIC

LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
XD2036-2	2x8	2x640	3000K	30°	80

TECH. DRAWING size in mm




SURFACE MOUNTED LIGHT



JELLYFISH FAMILY FIXED CEILING LIGHT

TECH. DRAWING



JELLYFISH FAMILY

LED  AC 220-240 V IP20 SMD 2835

	W	LUM	CCT	BEAM	CRI	DIA	H
XD2097	25	1250	3000K	115°	80	Φ368mm	82mm
XD2096	30	1500	3000K	115°	80	Φ417mm	82mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION


/

DRIVER OPTION


/

REFERENCE DRAWING

XD2097



XD2096



SURFACE MOUNTED LIGHT



CUP FAMILY - FIXED CEILING LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38° <input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION **Bridgelux / CITIZEN**

DRIVER OPTION **KEGU / LIFUD**

LED  100-240 V IP20 EVERCORE AREEK

	W	LUM	CCT	BEAM	CRI
XD2127	8	660	3000K	24°	80

TECH. DRAWING size in mm



CUP FAMILY - TILTABLE CEILING LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 38° <input type="radio"/> 60°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION **Bridgelux / CITIZEN**

DRIVER OPTION **KEGU / LIFUD**

LED  100-240 V IP20 EVERCORE AREEK

	W	LUM	CCT	BEAM	CRI
XD2128	8	660	3000K	24°	80

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



XD2165

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION **Bridgelux**

DRIVER OPTION /

LED  100-240 V IP20 CITIZEN AREEK

	W	LUM	CCT	BEAM	CRI
XD2165	10	632	3000K	24°	80

TECH. DRAWING size in mm



CONE FAMILY - FIXED CEILING LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION **Bridgelux**

DRIVER OPTION **OSRAM / LIFUD / TRIDONIC / AREEK**

LED  220-240 V IP20 CITIZEN KEGU

	W	LUM	CCT	BEAM	CRI
XD2048	40	3200	3000K	25°	80

TECH. DRAWING size in mm



SURFACE MOUNTED LIGHT



LED  100-240 V IP20 SMD AREEK

	W	LUM	CCT	BEAM	CRI
XD2081	30	1920	3000K	116°	80

XD2081

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
CCT 2700K 3000K 4000K
CRI 80 90

SOURCE OPTION /

DRIVER OPTION /

TECH. DRAWING size in mm

