

WALL LIGHT



LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
WL610	12	1080	3000K	36°	80

MULTIS SQUARE FAMILY ROTATABLE WALL LIGHT


OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION OSRAM

DRIVER OPTION AREEK

TECH. DRAWING size in mm



LED  220-240 V IP20 Bridgelux KEGU

	W	LUM	CCT	BEAM	CRI
WL612	12	1080	3000K	36°	80

MULTIS ROUND FAMILY ROTATABLE WALL LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 15°	<input type="radio"/> 24°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	

SOURCE OPTION OSRAM

DRIVER OPTION AREEK

TECH. DRAWING size in mm




WALL LIGHT



WL396 / WL396A FIXED UP & DOWN WALL LIGHT

TECH. DRAWING



WL396 / WL396A

LED  100-240 V IP20 SMD AREEK

	W	LUM	CCT	BEAM	CRI	L	T	H
WL396	11	660	3000K	/	80	300mm	26.5mm	50mm
WL396A	21	1300	3000K	/	80	600mm	26.5mm	50mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION


/

DRIVER OPTION


TRIDONIC

REFERENCE DRAWING

WL396



WL396A



WALL LIGHT



WL398A

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION /

DRIVER OPTION /

LED  100-240 V IP20 SMD AREEK

	W	LUM	CCT	BEAM	CRI
WL398A	8	620	3000K	/	80

TECH. DRAWING size in mm



WL536

ADJUSTABLE AND UP & DOWN WALL LIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION **Bridgelux**

DRIVER OPTION **HEP**


LED  100-240 V IP20 CREE AREEK

	W	LUM	CCT	BEAM	CRI
WL536	8	180	3000K	/	80

TECH. DRAWING size in mm



WALL LIGHT

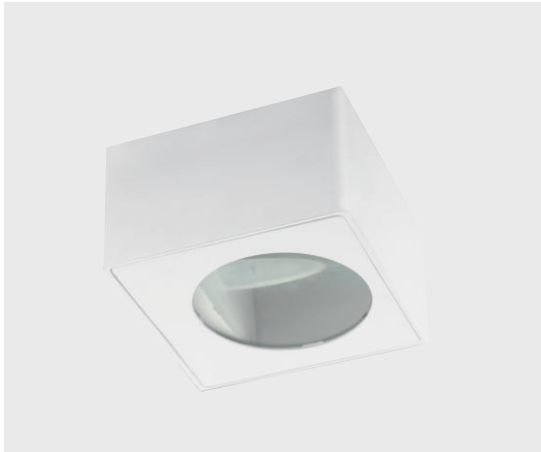

WL537 UP & DOWN WALL LIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION **Bridgelux**

DRIVER OPTION **HEP**

LED  100-230 V IP54 CREE AREEK

	W	LUM	CCT	BEAM	CRI
WL537	8	160	3000K	/	80

TECH. DRAWING size in mm



WL538 UP & DOWN WALL LIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION **Bridgelux**

DRIVER OPTION **HEP**

LED  100-240 V IP54 CREE AREEK

	W	LUM	CCT	BEAM	CRI
WL538	2x3	2x90	3000K	/	80

TECH. DRAWING size in mm



WALL LIGHT



WL541 UP & DOWN WALL LIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION /

DRIVER OPTION HEP

LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
WL541	8	330	3000K	/	80

TECH. DRAWING size in mm



WL542 UP & DOWN WALL LIGHT

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION /

DRIVER OPTION HEP

LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
WL542	8	330	3000K	/	80

TECH. DRAWING size in mm



WALL LIGHT



WL543 UP & DOWN WALL LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION /

DRIVER OPTION HEP

LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
WL543	8	330	3000K	/	80

TECH. DRAWING size in mm



WL546 UP & DOWN WALL LIGHT

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION /

DRIVER OPTION HEP

LED  100-240 V IP20 Bridgelux AREEK

	W	LUM	CCT	BEAM	CRI
WL546	8	560	3000K	/	80

TECH. DRAWING size in mm





WL572

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION /

DRIVER OPTION OSRAM

LED  100-240 V IP20 SMD AREEK

TECH. DRAWING size in mm

	W	LUM	CCT	BEAM	CRI
WL572	20	980	3000K	180°	80



WL630

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005


CCT 15° 24° 36°

CCT 2700K 3000K 4000K

CRI 80 90


SOURCE OPTION /

DRIVER OPTION /

LED  AC 220-240 V IP20 EDISON

TECH. DRAWING size in mm

	W	LUM	CCT	BEAM	CRI
WL630	10	800	3000K	24°	80

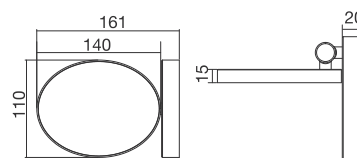

WALL LIGHT



WL611

OPTIONS

Color ○ RAL 9016 ○ RAL 9006 ○ RAL 9005

CCT ○ 2700K ○ 3000K ○ 4000K

CRI ○ 80 ○ 90


SOURCE OPTION /

DRIVER OPTION /

LED  100-240 V IP20 SMD AREEK

	W	LUM	CCT	BEAM	CRI
WL611	10	600	3000K	/	80

TECH. DRAWING size in mm

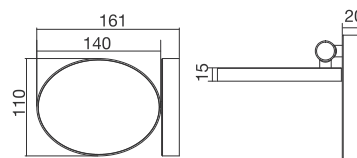

WL613

OPTIONS

Color ○ RAL 9016 ○ RAL 9006 ○ RAL 9005

CCT ○ 15° ○ 24° ○ 36°

CCT ○ 2700K ○ 3000K ○ 4000K

CRI ○ 80 ○ 90


SOURCE OPTION Bridgelux


DRIVER OPTION /

LED  100-240 V IP20 OSRAM AREEK

	W	LUM	CCT	BEAM	CRI
WL613	10	900	3000K	24°	80


TECH. DRAWING size in mm

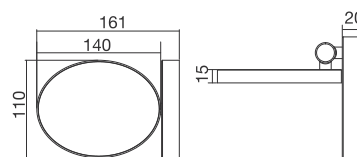

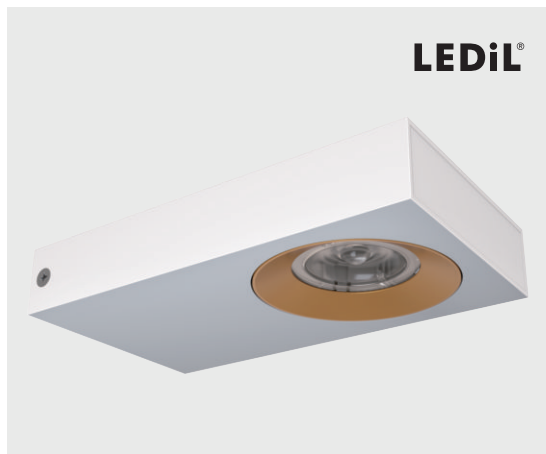

ASTREA
LENS CHANGEABLE CEILING LIGHT

TECH. DRAWING

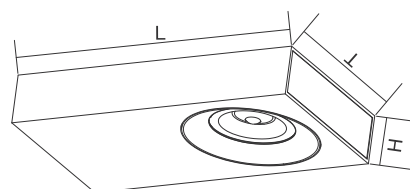

ASTREA FAMILY

- LED
-
- 220-240 V
- IP20
- CITIZEN
- TRIDONIC

	W	LUM	CCT	BEAM	CRI	L	T	H
WL631	15	1200-1400	3000K	30°	80	180mm	100mm	30mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005

CCT 2700K 3000K 4000K

CRI 80 90

SOURCE OPTION OSRAM / Bridgelux

DRIVER OPTION /

LENS OPTIONS

