

KETAI

CATALOGUE
2015



FOR DISTRIBUTORS 2015

KETAI



科泰实业照明有限公司
KETAI INDUSTRIES LIGHTING CO., LTD.

Tel:+86 757 8560 7707 Email:service@ketailighting.com
Fax: +86 757 8563 3675 Website:www.ketailighting.com

佛山市南海区里水镇麻奢新街4号 528244
4 Mashe New Street, Lishui, Nanhai, Foshan, Guangdong,
China 528244



*Obey your vision
follow your schedule*

COMPANY
PROFILE

01



WELCOME TO READ
AND ORDER

Ketai Industries Lighting Co., Ltd. was established in 1999 by Brother Daniel and David, focusing on development and production of top level commercial lighting products, and having developed thousands of interior and exterior lighting fixtures, including recessed fluorescent lights, track lights, multiple lights modular and etc., Since entering LED Lighting era, we new products, incluing LED downlights, LED track lights, LED spot lights, LED wall lighting and outdoor fixtures.

OUR OFFICE BUIDING

02

03



We are ISO9001 Certified manufacturer and most of our products are approved with CE, CB, GS, TUV and CCC certifications. The quality of our products is assured by our implementing QS, ERP system and Well-equipped testing lab. With more than 14 years experience in lighting fixture exporting field, our markets have covered the whole Europe, mid-southern America, Mid-East and China.



KETAI has updated technology and experiences on developing & production of lighting fixtures, especially LED lighting products, by accumulating over ten years as a key LED lighting manufacturer in China.



Compared to traditional lighting, LED emits no UV or IR radiation, has a very low heat generation, a long lifetime as well as a very low power consumption but contains no mercury.

Environment friendly


Our LED downlights and spotlights have very low energy consumption and long functional life, reducing energy demand and CO₂ production. The exceptional performance reduces the installed quantities of luminaires and over-all costs and saves energy.



04

Energy efficient

By using optical design software, our lighting fixtures can provide a specific light distribution for different applications in general and accent lighting. They can also provide full light level when switched on, a general disadvantage of LEDs is their high light intensity, but the user doesn't have to sacrifice its lighting comfort for energy efficiency: the intense glare source of the LED is well mechanically shielded and free of glare.



Comfortable lighting

The excellent light distribution results in fewer luminaires and lower energy consumption. The thermal management of the luminaires has been technically optimized, which results in the prolonged life time of the LEDs and as can be instantaneously switched or dimmed, this also increases the working life and energy saving.

05



Painting



Manufacturing Base

Ketai has five workshops:
stamping workshop, die-casting workshop,
painting workshop, assembly workshop
and electronic workshop

Main machinery and equipment :

- . 26 sets of 12-120T punching machine
- . 8 sets of 168-400T zinc aluminum die-casting machine
- . many lean assembly lines
- . 2 imported powder painting lines
- . A series of other CNC, spinning, drilling, grinding, polishing ,folding and welding equipments



^ Laboratory Equipment

>> Orrosion resistance test



Laboratory Equipment

- Integrating sphere
- Corrosion resistance tester
- High temperature resistant tester
- Impact energy tester
- Push-pull effort tester
- Torque tester
- Illumination tester
- Leakage current tester
- Insulation resistance tester
- Grounding resistance tester
- Electrical strength tester
- Infrared imager



06



Teamwork

The R&D Department has 19 engineers and they independently research and develop more new products each year. Our engineers have the comprehensive ability of structure development, optical design, thermal design to meet customers' various demands.

The Export sales representatives are on the way for you.

Service for our business partners is a great priority with us and will also be intensified in the future.

The young and committed team is always endeavoured with our business partners to achieve the very best results for your projects.



Advanced optical technology

LED lights are developed by adopting world top class optical technology and process to guarantee outstanding optical quality. Consequently, LED has accurate light distribution , high light output, even and soft light while no dark dot, dark area or halo.



Even light with natural halo




Uneven light with dark dot and area



Uneven boundary with stray and virtual image

Average Ra evaluation index.

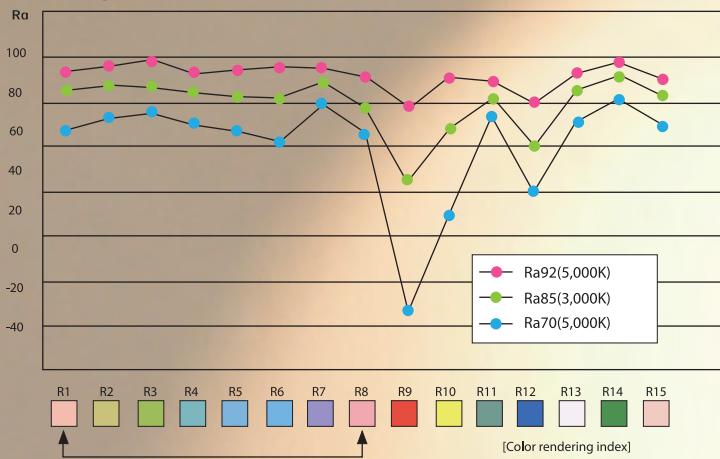


Average color rendering index ranges from R1 to R8
Eight kinds of color rendering index average.

Ra Evaluation index is to estimate the color rendering index of the lighting product to see the reflection level of natural color compared to those by incandescent lamps.
In standard range, we offer CRI 80+ product and CRI 95+ is available.

High CRI

Fitting with LED generates the light even and soft, making the subject natural and clean, and consequently creating strong stereoscopic feeling, and displaying natural and attractive colors.


Designed to emphasize the freshness of food helps to highlight the appeal and presentation of various types of foodstuffs. We offer a range of color temperatures that complement the specific type of food being presented. Because our lights irradiate the food with much less of the heat and no UV radiation that tend to accelerate food spoilage, you can present the commodities with brighter light that provides higher color rendering characteristics.

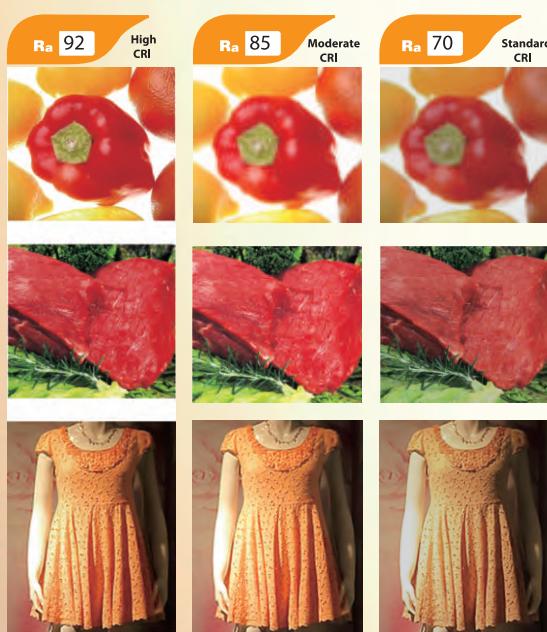

CCT Consistency

The requirement for high color temperature consistency for the quality lighting faces difficulties in market. When you see different white among different LED lighting fixtures, you will know the problem. It is a headache for designers and consumers. For this purpose, more and more LED light source manufacturers are using standard procedures to solve this problem - all LEDs are sorted out, stored and processed in strict and scientific criterion to guarantee the LEDs in consistency in one batch.

When LEDs are manufactured, the most challenging part is producing consistent and precise white color. Binning is the process of sorting the white LEDs into groups of similar white colors. The regulation of this process is outlined by the ANSI standards for tolerances of white color variations to fit within a color temperature group, or bin. Some LED manufacturers have adapted a more strict process of sorting called micro-bin which allows for much smaller white color variation. Ketai applies LEDs that exceed the ANSI binning standards, giving our fittings optimal color matching.

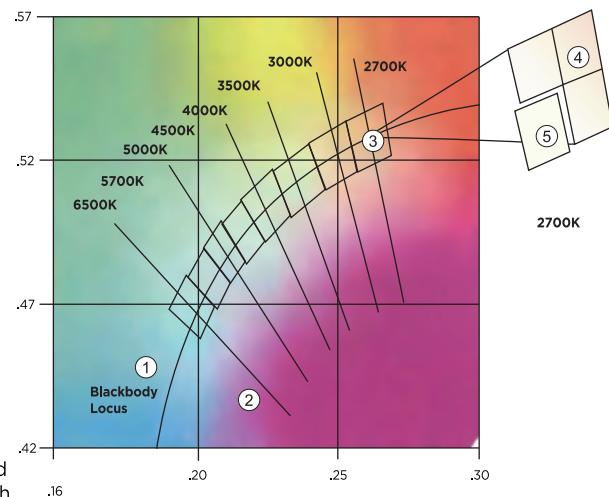

Binning Explanation - When white LEDs are created, whether they be on the warm or cool end of the spectrum, there are always slight inconsistencies with regards to specific color temperatures.

- The arched black line in the graph at right represents the white color spectrum.
- These long intersecting lines represent the range, from one end of the line to the other, of variation in color for each corresponding color temperature,
- In order to keep the range of each temperature as close to the same color as possible, ANSI created tolerance zones. Only the LEDs that fall into this range are used for that particular color temperature; these are referred to as "bins".
- As you can see this bin still has plainly visible variations throughout. ANSI tolerance zones are adjacent to account for the challenges around manufacturing LED chips consistently.
- Once divided into smaller bins, the differences in color are much less, allowing for minimal variation when two or more LEDs are used together.

Although there is a cost associated with consistency, various LED chip manufacturers now make smaller bins available. Micro-bin size varies between chip manufacturers and while micro-bins allow for better consistency by batch, there is commonly a color variation between batches.

Accurate light distribution and control



10°

15°

30°

Most of our product has different beam angles in range, like Diamond series have three kinds of beam angles, 10° & 15° & 30°, meeting the different lighting requirements.

CONTENS

1


Recessed
Downlight



- A01 KT6596A KT6594A
- A02 KT6596 KT6654
- A03 KT6659-2 KT6659-1 KT6820
- A04 KT6648-2 KT6648-1
- A05 KT6647-1 KT6647-2
- A06 KF16F-LED-3 KT16F-LED-2 KT16F-LED-1
- A07 KT6554 KT6662
- A08 KT6595 KT6814-1 KT6814-2
- A09 KT6551 KT6550 KT6553
- A10 KT6560-1 KT6560-2
- A11 KT6577 KT6578
- A12 KT6821 KT6822
- A13 KT6565A KT6564A
- A14 KT6565 KT6564
- A15 KT6657 KT6656
- A16 KT6658-1 KT6658-2
- A17 KT6644-1 KT6644-2 KT6644-3
- A18 KT6645-1 KT6645-2 KT6645-3
- A19 KT6309 KT6327 KT6574
- A20 KT6580
- A21 KT6344-1 KT6344-2
- A23 KT6583-1 KT6583-2
- A24 KT6584-2 KT6584-1
- A25 KT6585-1 KT6585-2
- A26 KT6566 KT6382 AR111 KT6379 Gx8.5
- A27 KT6567-1
- A28 KT6567-2
- A29 KT6347B
- A30 KT6347
- A31 KT6355
- A32 KT6355A
- A33 MH206-LED KT6627
- A34 MH103-LED
- A35 - A36 KT6631 KT6632 KT6633 KT6634
- A37-A38 KT6664 KT6653 KT6654 KT6655
- A39 KT6614 KT6613
- A40 KT6599 KT6598
- A41 KT6811
- A42 KT6666
- A43 KT6562 KT6673
- A44 KT6561 KT6663
- A45 KT7125 KT7127
- A46 KT7126 KT7128

2


Track
Light



- A47 KT6345 KT6348 KT6370
- A48 KT6346 KT6369 KT6371
- A49 KT6621
- A50 MH1097 MH1095
- A51 FT210 FT210C
- A52 FT211 FT211C
- A53-A54 KT6618 KT6617 KT6572
- A55 KT6808A
- A56 KT6808B
- A57 KT6808C
- A58 KT6563
- A59 KT6679-1
- A60 KT6679-2
- A61 KT6673
- A62 KT6667
- A63 KT6809
- A64 KT6810
- A65 KT6697
- A66 KT6698
- A67 KT6696
- A68 KT6695
- A69 KT6815
- A70 KT6816-1 KT6814-2
- A72 KT6817 KT6818
- A73 KT6343B KT6343C
- A74 KT6813A
- A75 KT6520 KT6524
- A76 KT6525
- A77 MH1088A
- A78 MH1088B

3


Ceiling
Light



- B01 MHT8584
- B02 MHT8584A
- B03 MHT8585
- B04 MHT8585A
- B05 MHT8586
- B06 MHT8556H MHT8556
- B07 MHT8558 MHT8554
- B08 MHT8663 MHT8704
- B09 MHT8663 G12 MHT8703 HIP AR30
- B10 MHT8583
- B11 HKTA8582
- B12 MHT8588
- B13 MHT8554-LED
- B14 MHT8579
- B15 MHT8540
- B16 MHT8548
- B17 MHT8148-LED
- B18 MHT8148
- B19 MHT8667A
- B20 MHT8555
- B21 MHT8573
- B22 MHT8575
- B23 MHT8527
- B24 MHT8562
- B25 MHT8572
- B26 MHT8561
- B27 MHT8557
- B28 KTK1-8587 HC8587 HKTA-8587
- B29 KTK1-8591 HC8591 HKTA-8591
- B30 KTK1-8592 HC8592 HKTA-8592
- B31 KTWA8551
- B32 KTWA8133
- B33 KTX8554

4

Pendant
Light




- C01 XD2055A
- C02 XD2055B
- C03 XD2022-L50
- C04 XD2022A XD2030 AR111
- C05 XD2036-1
- C06 XD2036-2
- C07 XD2019
- C08 XD2020
- C09 XD2017
- C10 XD2018
- C11 XD2044
- C12 XD2045
- C13 XD2046
- C14 XD2047
- C15 XD2048
- C16 XD2054
- C17 XD2049
- C18 XD2050
- C19 XD2068
- C20 XD2053
- C21 XD2051
- C22 XD2052
- C23 XD2069
- C24 XD2070
- C25 XD2059
- C26 XD2060
- C27 XD2061
- C28 XD2034
- C29 XD2065
- C30 XD2066
- C31-C32 XD2035

D19-D20 KF1018

CONTENS

5

Wall
Light



- E01 WL391A
- E02 WL392A
- E03 WL393A
- E04 WL396 WL396A
- E05 WL397A
- E06 WL398A
- E07 WL536
- E08 WL537
- E09 WL538
- E10 WL539
- E11 WL540
- E12 WL541
- E13 wL542
- E14 WL543
- E15 WL544
- E16 WL546
- E17 WL547
- E18 WL391E
- E19 WL545B
- E20 WL545A
- E21 WL548
- E22 WL552



6 Traditional
light



H01-H06 Garden Light



- J01 KT6394
- J02 KT6395
- J03 KT6388
- J04 KT6389
- J05 KT6387 KT6391
- J06 KT6392 KT6393
- J07 FT202 FT202K2
- J08 KT6277 KT6280
- J09 KT6352 KT6351 KT6351-1
- J10 KT6352-2 KT6351-2
- J11 KT6001 KT6001S KT6002 KT6002S
- J12 KT6001F KT6002F
- J13 KT6043 KT6161 KT6188 KT6188A
- J14 KT6601 KT6602 KT6603 KT6190 KT6191

- J15 KT6170 KT6171 KT6172
- J16 KT6314 KT6315 KT6015
- J17 KT6023 KT6144 KT6145
- J18 KT6131 KT6132 KT6090
- J19 KT6323 KT6327 KT6243
- J20 KT6058 KT6058S
- J21 KT6065 KT6066 KT6319 KT6320
- J22 KT6187 KT6189
- J23 KT6221 KT6202 KT6202A
- J24 KT6241 KT6276 KT6240
- J25 KT6358 KT6359
- J26 KT6101 KT6160 KT6102
- J27 KT6175 KT6177 KT6178 KT6181
- J28 KT6627 KT6099



- K01 8001 8002 8003
- K02 8010 8020
- K03 8096 8090
- K04 8121 8061
- K05 8141 8125
- K06 8126 8127
- K07 8128 8129
- K08 8130 8133
- K09 8138 8139
- K10 8015 8023
- K11 8087 8079
- K12 8039 8108
- K13 8641 8643 122 123
- K14 126 127 150
- K15 151 152
- K16 150 8140

K17-K22 Track Light Series



- L01 KT6390-1
- L02 KT6390-2 KT6390-3
- L03 KT16D-1 KT16D-2 KT16D-3
- L04 KT6305-1 KT6305-2 KT6305-3
- L05 KT16E Series
- L06 KT12P Series
- L07 KT111 Series
- L08 KT12D Series
- L09 KT111H Series
- L10 KT12D Series
- L11 KT111H Series
- L12 KT111N Series
- L13 KT111H Series

- L14 KT12B
- L15 SL361-1
- L16 SL361-2
- M01 MH1094 MH1096
- M02 MH1089
- M03 MH1050 MH1050DG
- M04 MH1075 MH1098 NH1038
- M05 MH1063 MH1064 MH1065
- M06 MH1040 MH1041 MH1035
- M07 MH1051 MH1055 MH1057
- M08 MH1052 MH1053
- M09 MH1021 MH1021D
- M10 MH1022D MH1022S MH1025
- M11 KT7084 KT7054
- M12 MH1080
- M13 MH1030 MH1043
- M14 KT7063A KT7063GA KT7063XA
- M15 KT7083A KT7083GA KT7083XA
- M16 KT7103A KT7103GA KT7103XA
- M17 FIX8 FIX10 FIX12 FIX13



- N01 MH182 MH181
- N02 MH171 MH172
- N03 MH103 MH169
- N04 MH167 MH170
- N05 MH194 MH206 MH164



- P01 WL328 WL328A
- P02 KT6224A
- P03 WL321 WL321D
- P04 WL322 WL322D
- P05 WL323 WL323D
- P06 WL324 WL327 WL329
- P07 WL401 WL404 WL407
- P07 WL399 WL410

- R01-R02 Accessories
- R03-R04 Driver

Recessed Downlight


KETAI




OBEY YOUR VISION, RELISH THE MOMENT

KETAI

Starfish Recessed DownLight



KT6596A IP65



KT6594A IP65


A01



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	513 LM
CCT	3000K
CRI	> 80
Beam Angle	30 ° / 60 °

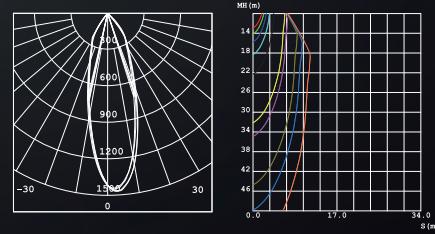

PACKING

Box size: 16.5 x 11.5 x 6 cm

Carton size: 36 x 33 x 26 cm

Pcs per carton: 24 pcs


Each carton : 0.032 m³

Starfish Recessed DownLight


    




KT6596 IP20



KT6594 IP20



LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	604 LM
CCT	3000K
CRI	> 80
Beam Angle	30 ° / 60 °

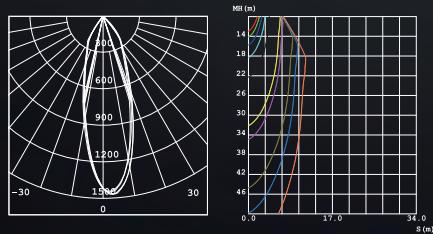

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size: 16.5 x 11.5 x 6 cm

Carton size: 36 x 33 x 26 cm

Pcs per carton: 24 pcs


Each carton : 0.032 m³




A02

KETAI

A03

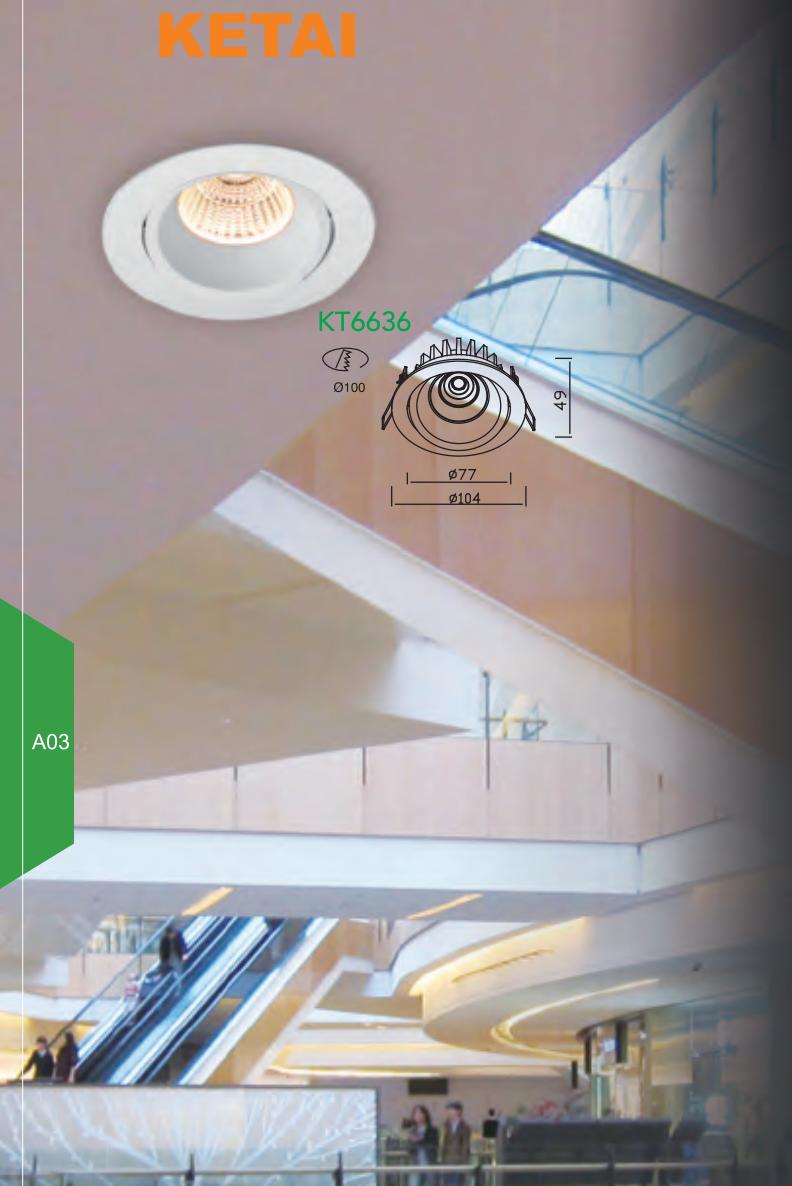

KT6636



Starfish Recessed DownLight



KT6659-2



KT6659-1




TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

LED Brand	Bridgelux V8 BXRE-30E0800	
Driver	AK-10W-36330-D5	
LED Power	6.2 W	2x6.2 W
Driver Current	330mA	330mA
Total Power	7.5 W	2x7.5 W
Luminous Flux	604 LM	1130 LM
CCT	3000K	
CRI	> 80	
Beam Angle	30 ° / 60 °	

PACKING


	KT6620	KT6659-1	KT6659-2
Box size:	17x12.5x6 cm	15x14x10.5 cm	25 x 15 x 9.5 cm
Carton size:	39x35.5x26.5 cm	43.5x31.5x44 cm	51.5 x 46.5 x 40 cm
Pcs per carton:	24 pcs	24 pcs	24 pcs
Each carton :	0.037 m ³	0.06 m ³	0.096 m ³

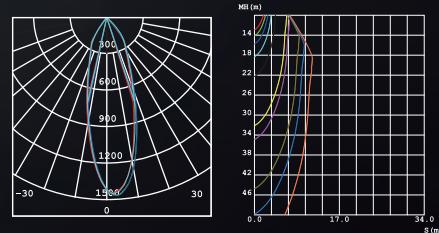



KETAI

Starfish Recessed DownLight


    

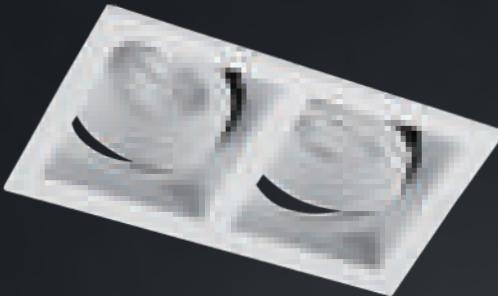


KT6648-2



KT6648-1



LED Brand	Bridgelux V8 BXRE-30E0800	
Driver	AK-10W-36330-D5	
LED Power	6.2 W	2x6.2 W
Driver Current	330mA	330mA
Total Power	7.5 W	2x7.5 W
Luminous Flux	604 LM	1130 LM
CCT	3000K	
CRI	> 80	
Beam Angle	30 ° / 60 °	

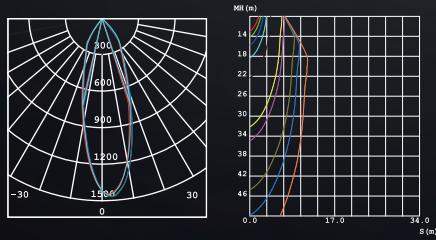

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

	KT6648-1	KT6648-2
Box size:	17x14x8.5 cm	26.5x12.5x8.5 cm
Carton size:	43.5x36.5x36 cm	39x27.5x36.5 cm
Pcs per carton:	12 Pcs	12 Pcs
Each carton :	0.057 ³	0.039 ³



04

KETAI



Starfish Recessed DownLight



TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

	KT6647-1	KT6647-2
Box size:	16.5 x 14 x 10.5 cm	26 x 14 x 10.5 cm
Carton size:	43.5 x 34.5 x 22.5 cm	29.5 x 27 x 44 cm
Pcs per carton:	12 pcs	8 pcs
Each carton :	0.034 m ³	0.035 m ³




KT6647-1



KT6647-2




LED Brand	Bridgelux V8 BXRE-30E0800	
Driver	AK-10W-36330-D5	
LED Power	6.2 W	2x6.2 W
Driver Current	330mA	330mA
Total Power	7.5 W	2x7.5 W
Luminous Flux	604 LM	1130 LM
CCT	3000K	
CRI	> 80	
Beam Angle	30 ° / 60 °	

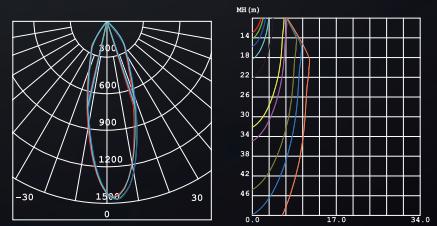


KETAI

Penguin Recessed DownLight



KT16F-LED-3



KT16F-LED-2



KT16F-LED-1



A06


Item:	KT16F-LED-1	KT16F-LED-2	KT16F-LED-3
LED Brand	Bridgelux V8 BXRE-30E0800		
Driver	AK-10W-36330-D5		
LED Power	6.2 W	2x6.2 W	3x6.2 W
Driver Current	330mA	330mA	330mA
Total Power	7.5 W	2x7.5 W	3x7.5 W
Luminous Flux	606 LM	1130 LM	1650 LM
CCT	3000K		
CRI	≥ 80 / 90		
Beam Angle	30 ° / 60 °		

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING	KT16F-LED-1	KT16F-LED-2	KT16F-LED-3
Box size:	14x13x14 cm	23x13x14 cm	33x13x14cm
Carton size:	40.5x29.5x29.5cm	47.5x27.5x29.5 cm	34x27.5x29.5cm
Pcs per carton:	12 pcs	8 pcs	4 pcs
Each carton :	0.035 m3	0.038 m3	0.027 m3

Bridgelux V8 6.2W

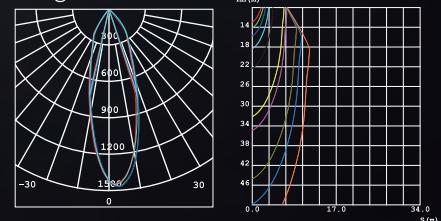


KETAI




Starfish Recessed DownLight


D^{0.3m} CE RoHS IP20 F



KT6554

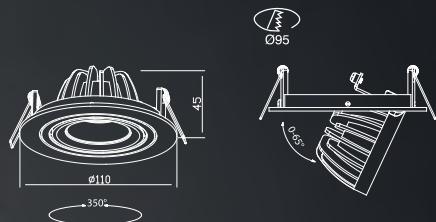

KT6662

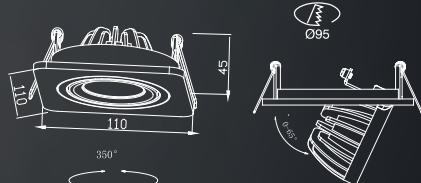


TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	604 LM
CCT	3000K
CRI	> 80
Beam Angle	30 ° / 60 °

PACKING


Box size:	18 x 13.5 x 5.5 cm
Carton size:	37.5 x 29.5 x 42.5cm
Pcs per carton:	30pcs
Each carton :	0.047m ³

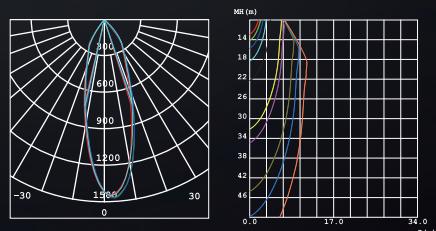


KETAI

Starfish Recessed DownLight

CE RoHS IP20 IP44




KT6595 IP44



KT6814-1



KT6814-2



LED Brand Bridgelux V8 BXRE-30E0800

Driver AK-10W-36330-D5

LED Power 6.2 W

Driver Current 330mA

Total Power 7.5 W

Luminous Flux 606 LM

CCT 3000K

CRI > 80

Beam Angle 30 ° / 60 °

PACKING

Box size: 16.5 x 11.5 x 6 cm

Carton size: 36 x 33 x 26 cm

Pcs per carton: 24 pcs

Each carton : 0.032 m³

TECHNICAL DATA

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating

Adjustable : Gimbal

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: V.M. Reflector



KETAI

Starfish Recessed DownLight



09

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	606 LM
CCT	3000K
CRI	> 80
Beam Angle	30 ° / 60 °

PACKING


	KT6550	KT6551	KT6553
Box size:	10.5 x 10.5 x 8 cm	12 x 10 x 8 cm	10 x 10 x 11.5 cm
Carton size:	33.5 x 22.5 x 43 cm	32 x 25.5 x 43 cm	42 x 21.5 x 37.5 cm
Pcs per carton:	30 pcs	30 pcs	30 pcs
Each carton :	0.033 m ³	0.035 m ³	0.034 m ³




KT6551



KT6550



KT6553



KETAI

Starfish Recessed DownLight

CE RoHS IP20



LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	606 LM
CCT	3000K
CRI	> 80
Beam Angle	30 ° / 60 °

TECHNICAL DATA

PACKING	KT6560-1	KT6560-2
Box size:	15 x 14 x 10.5 cm	26.5 x 15 x 9.5 cm
Carton size:	43.5 x 31.5 x 44 cm	54.5 x 46.5 x 40 cm
Pcs per carton:	24 pcs	24 pcs
Each carton :	0.06 m ³	0.1 m ³

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

A10

KETAI




A11

Starfish Recessed DownLight

D^{0.3m} CE RoHS IP20 F




KT6577



Ø78



KT6578



Ø78


TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	606 LM
CCT	3000K
CRI	> 80
Beam Angle	30 ° / 60 °

PACKING

KT6577	KT6578
Box size:	12.5 x 12.5 x 10.5 cm
Carton size:	52.2 x 26.5 x 33.5 cm
Pcs per carton:	24 pcs
Each carton :	0.046 m ³
	13 x 13 x 10.5 cm
	54 x 27.5 x 33.5cm
	24 pcs
	0.049 m ³

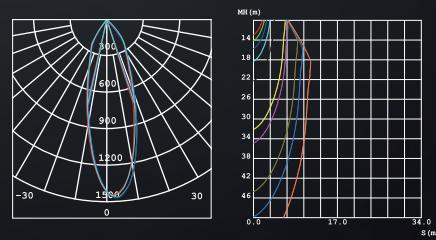


Cone


Recessed Downlight



CE RoHS





KT6821



KT6822

LED Brand	Bridgelux
V8 BXRE-30E0800	
LED Power	8.2 W
Driver	AK-10W-24500-D5
Total Power	11 W
Driver Current	500 mA
Luminous Flux	870 LM
CCT	3000 K
CRI	≥ 80/90/95
Beam Angle	15° / 36°



TECHNICAL DATA

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Tiltable
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	216 pcs


PACKING

Box size:	16 x 11.5 x 10 cm
Carton size:	36 x 33.5 x 42 cm
Pcs per carton:	24 pcs
Each carton :	0,05 m ³



KETAI

Recessed DownLight



KT6564A




KT6565A

TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Black, Grey
Adjustable :	Fixed
Installation by:	Single Acticon Spring
Wiring:	W/wire
Optics:	Optical diffuser panel
MOQ	216 pcs

LED Brand	Nichia
LED Power	6 W
Driver	AK-10W-36330-D5
Total Power	8.1 W
Driver Current	330 mA
Luminous Flux	432 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	84 °

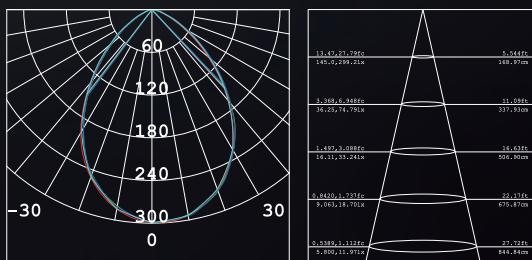

PACKING


Box size:	16 x 11.5 x 9.5 cm
Carton size:	36 x 33.5 x 43 cm
Pcs per carton:	24 pcs
Each carton :	0,048 m ³

A13


KETAI

Starfish Recessed DownLight

CE RoHS IP20




KT6565



KT6564

LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	606 LM
CCT	3000K
CRI	> 80
Beam Angle	30 ° / 60 °

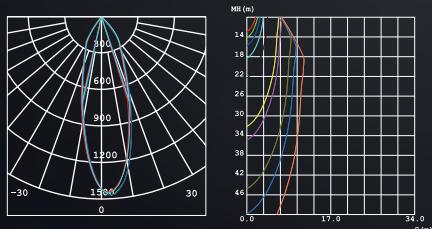

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	16 x 11.5 x 9.5 cm
Carton size:	36 x 33.5 x 43 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m³




A14

KETAI



Starfish Recessed DownLight

D^{9.3m} CE RoHS IP20 F

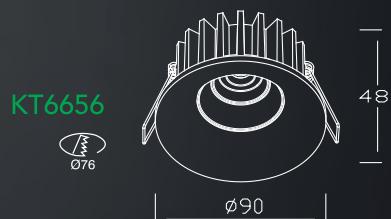


TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	fixed / Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	604 LM
CCT	3000K
CRI	> 80
Beam Angle	30 ° / 60 °

PACKING

KT6656	KT6657
Box size:	16x11.5x6 cm
Carton size:	36x33.5x26.5 cm
Pcs per carton:	24 pcs
Each carton :	0.032 m ³
	17x12.5x6 cm
	39x35.5x26.5 cm
	24 pcs
	0.037m ³

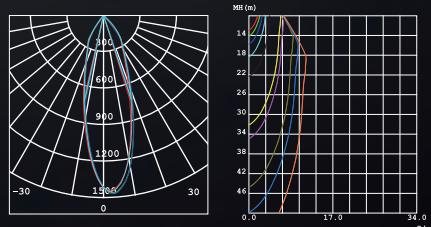


Starfish Recessed DownLight




KT6658-1







KT6658-2





LED Brand	Bridgelux V8 BXRE-30E0800	
Driver	AK-10W-36330-D5	
LED Power	6.2 W	2x6.2 W
Driver Current	330mA	330mA
Total Power	7.5 W	2x7.5 W
Luminous Flux	604 LM	1130 LM
CCT	3000K	
CRI	> 80	
Beam Angle	30 ° / 60 °	

**TECHNICAL DATA**

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING


	KT6658-1	KT6658-2
Box size:	15 x 14 x 10.5 cm	25 x 15 x 9.5 cm
Carton size:	43.5 x 31.5 x 44 cm	51.5 x 46.5 x 40 cm
Pcs per carton:	24 pcs	24 pcs
Each carton :	0.06 m³	0.096 m³

A16

KETAI


Penguin Recessed DownLight

CE RoHS     




KT6644-3

 293x107



KT6644-2

 200x107



KT6644-1

 107x107

A17



TECHNICAL DATA

Input	110-230V AC 50/60Hz
Main Material	Aluminium +Steel
Adjustable	Gimbal
Installation by	S.A.Spring
Wiring	Terminal Block
Optics	V.M. Reflector



ITEM	KT6644-1	KT6644-2	KT6644-3
LED Brand	Bridgelux V8 BXRE-30E800		
LED Power	6.2 W	2x6.2 W	3x6.2 W
Driver	AK-10W-36330-D5		
Driver Current	350mA		
Total Power	7.5W	2x7.5 W	3x7.5W
Luminous Flux	510 LM	1050 LM	1450 LM
CCT	3000K		
CRI	> 80		
Beam Angle	30 °		

PACKING

	KT6644-1	KT6644-2	KT6644-3
Box Size	16.5x14x10.5cm	26x14x10.5cm	37x14x10.5cm
Carton Size	43.5x34.5x22.5cm	29.5x27x44cm	38x29.5x33.5cm
Pcs per carton	12 pcs	8 pcs	6 pcs
Carton Volume	0.034 m3	0.035 m3	0.038 m3

KT6644-3


Bridgelux V8 6.2 W




KETAI

Penguin Recessed DownLight


CE RoHS



KT6645-3



KT6645-2



KT6645-1



A18

ITEM	KT6645-1	KT6645-2	KT6645-3
LED Power	6.2 W	2x6.2 W	3x6.2 W
Driver	AK-10W-36330-D5		
Driver Current	350mA		
Total Power	7.5 W	2x7.5 W	3x7.5 W
Luminous Flux	510 LM	1050 LM	1450 LM
CCT	3000K		
CRI	> 80		
Beam Angle	30 °		


TECHNICAL DATA

Input	110-230V AC 50/60Hz
Main Material	Aluminium +Steel
Adjustable	Gimbal
Installation by	S.A.Spring
Wiring	Terminal Block
Optics	V.M. Reflector
LED Brand	Bridgelux V8 BXRE-30E800

PACKING

	KT6644-1	KT6644-2	KT6644-3
Box Size	16.5x14x10.5cm	26x14x10.5cm	37x14x10.5cm
Carton Size	43.5x34.5x22.5cm	29.5x27x44cm	38x29.5x33.5cm
Pcs per carton	12 pcs	8 pcs	6 pcs
Carton Volume	0.034 m3	0.035 m3	0.038 m3

Bridgelux V8 6.2W

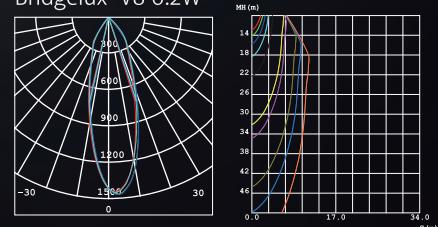

KETAI



A19

Penguin Recessed DownLight


CE RoHS IP20 F




KT6309



KT6327



KT6574



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	300 pcs

LED Brand	Bridgelux V10 BXRE-30E1000	
LED Power :	9.5 W	13.6 W
Driver	AK-10W-36330-D5	KEP0902-500-D6
Total Power	11.7 W	15.8 W
Driver Current	350mA	500mA
Luminous Flux	737 LM	1126 LM
CCT	3000K	
CRI	≥ 80 / 90	
Beam Angle	18 ° / 20 °	

PACKING

	KT6309	KT6327	KT6574	KT6580
Box size:	14.5 x 14.5 x 12 cm	15 x 15 x 14.5 cm	11.5 x 11.5 x 11 cm	8.7 x 8.7 x 9.5 cm
Carton size:	43.5 x 31 x 26.5cm	47 x 31.5 x 45.5 cm	36 x 24.5 x 46 cm	35 x 19 x 26.5 cm
Pcs per carton:	12 pcs	18 pcs	24 pcs	24 pcs
Each carton :	0.04 m3	0.067 m3	0.041 m3	0.052 m3

Recessed Downlight

KETAI



KETAI BRIGHTENS YOUR LIFE

KETAI

Sealion Recessed DownLight


CE RoHS    IP20  



KT6580




Bridgelux 9.5W



E (lx)	h (m)	Ø (cm)
2229	1	29.43
557	2	58.86
247	3	88.29
193	4	117.72
89	5	147.15

Bridgelux 13.6W



E (lx)	h (m)	Ø (cm)
2926	1	31.59
732	2	63.18
325	3	94.77
183	4	126.37
117	5	157.96

KT6309



KT6327



KT6574



KT6580




KETAI




Sealion Recessed DownLight


CE RoHS IP20 F



KT6344-1



KT6344-2




A21




LED Brand	Bridgelux V10 BXRE-30E1000			
LED Power	9.5 W	13.6 W	2x9.5 W	2x13.6 W
Driver	AK-10W-36330-D5	KEP0902-500-D6	AK-10W-36330-D5	KEP0902-500-D6
Total Power	11.7 W	15.8 W	2x11.7 W	2x15.8 W
Driver Current	350mA	500mA	350mA	500mA
Luminous Flux	737 LM	1126 LM	1473 LM	2250 LM
CCT	3000K		3000K	
CRI	> 80		> 80	
Beam Angle	18 ° (30 °)		18 ° (30 °)	
Box size:	19.5 x 17x 13.5 cm		30 x 19.5 x 13.5 cm	
Carton size:	40.5 x 35.5 x 42.5cm		40.5 x 31.5 x 42.5 cm	
Pcs per carton:	12 pcs		6 pcs	
Each carton :	0.061 m3		0.054 m3	

Bridgelux 9.5W




Bridgelux 13.6W



**KETAI**

Change Moudle Recessed DownLight

CE RoHS IP20

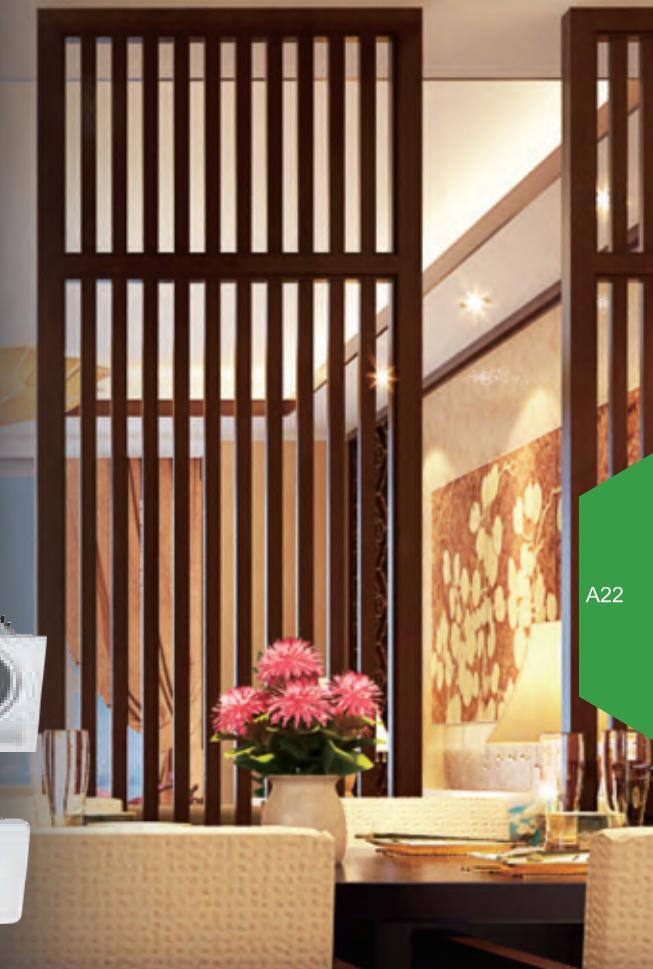

A22

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
LED Power :	12.3 W
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	PC Metalized Reflector
MOQ	300 pcs

Change Moudle

Recessed Downlight

In order to meet the diversified designs, Our series of LED DownLight specially develops multiple light source combination serie products, custom-made on your design requirements. You can choose different applications, different light sources for mixed designs.

KETAI

Change Moudle Recessed DownLight


CE RoHS IP20



A23



KT6583-1





KT6583-2



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	108 pcs
CITIZEN	12.3 W




Item	KT6583-1		KT6583-2	
LED Brand	CITIZEN CLL032-1205A5	CITIZEN CLU034-1206B8	CITIZEN -303M1A2	CITIZEN CLU034-1206B8
LED Power	12.3 W	22 W	2x12.3 W	2x22 W
Driver	AK-16W-60350-D6	LC 25W 600mA	LC 25W 600mA	LC 25W 600mA
Total Power	15.4 W	25 W	2x15.4 W	2x25 W
Driver Current	350mA	600mA	350mA	1200mA
Luminous Flux	1080 LM	1720 LM	2160 LM	3440 LM
CCT	3000K		3000K	
CRI	> 80		> 80	
Beam Angle	24 ° (17 ° / 60 °)		24 ° (17 ° / 60 °)	
PACKING	KT6583-1		KT6583-2	
Box size	17.3 x 8 x 19.5 cm		20.5 x 9 x 35 cm	
Carton size	40.5 x 36.5 x 26 cm		42.5 x 36.5 x 38.5 cm	
Pcs per carton	12 pcs		8 pcs	
Each carton	0,038 m³		0,06 m³	



KETAI

Change Moudle Recessed DownLight


CE RoHS IP20



KT6584-1



KT6584-2





A24

Item	KT6584-1		KT6584-2	
LED Brand	CITIZEN CLL032-1205A5	CITIZEN CLU034-1206B8	CITIZEN CLL032-1205A5	CITIZEN CLU034-1206B8
LED Power	12.3 W	22 W	2x12.3 W	2x22 W
Driver	AK-16W-60350-D6	LC 25W 600mA	LC 25W 600mA	LC 25W 600mA
Total Power	15.4 W	25 W	2x15.4 W	2x25 W
Driver Current	350mA	600mA	350mA	1200mA
Luminous Flux	1080 LM	1720 LM	2160 LM	3440 LM
CRI	3000K			
CRI	> 80			
Beam Angle	24 ° (17 ° / 60 °)			

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	108 pcs

CITIZEN 12.3 W



PACKING	KT6584-1	KT6584-2
Box size	17.3 x 8 x 19.5 cm	20.5 x 9 x 35 cm
Carton size	40.5 x 36.5 x 26 cm	42.5 x 36.5 x 38.5 cm
Pcs per carton	12 pcs	8 pcs
Each carton	0,038 m3	0,06 m3

KETAI




Change Moudle Recessed DownLight


CE RoHS IP20 F



KT6585-1



KT6585-2





280x130

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Tilttable
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	PC metalized reflector
MOQ	108 pcs

CITIZEN 12.3 W



Item	KT6584-1		KT6584-2	
LED Brand	CITIZEN	CITIZEN	CITIZEN	CITIZEN
	CLL032-1205A5	CLU034-1206B8	CLL032-1205A5	CLU034-1206B8
		-303M1A2		-303M1A2
LED Power	12.3 W	22 W	2x12.3 W	2x22 W
Driver	AK-16W-60350-D6	LC 25W 600mA	LC 25W 600mA	LC 25W 600mA
Total Power	15.4 W	25 W	2x15.4 W	2x25 W
Driver Current	350mA	600mA	350mA	1200mA
Luminous Flux	1080 LM	1720 LM	2160 LM	3440 LM
CRI		3000K		
CRI		> 80		
Beam Angle		24 ° (17 ° / 60 °)		

PACKING	KT6585-1	KT6585-2
Box size	22.5 x 22.5 x 10 cm	39 x 22.5 x 10 cm
Carton size	46.5 x 46.5 x 32 cm	46.5 x 40 x 32 cm
Pcs per carton	14 pcs	6 pcs
Each carton	0,069 m³	0,072 m³

KETAI

Snail Recessed DownLight



KT6566



KT6382 AR111
G53 QR111 50W

KT6379 Gx8.5
GX8.5 HIR111-CE-P 70W

Input	110-230V AC 50/60Hz
LED Brand	Bridgelux Vero13 BXRC-30E2000
LED Power	23 W
Driver	AK-30W-700-D6
Driver Current	700mA
Total Power	26.3 W
Luminous Flux	1772 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)




PACKING

Box size:	15.5 x 15.5 x 16.5 cm
Carton size:	48 x 32.5 x 34.5 cm
Pcs per carton:	12 pcs
Each carton :	0.054 m³

TECHNICAL DATA

Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	V.M. Reflector



h (m)	Ø (cm)
49027	25.59
12251	51.18
5445	76.76
3063	102.35
1960	127.94

A26

KETAI

A27



TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	23.5 x 21.5 x 20.5 cm
Carton size:	65 x 24 x 43 cm
Pcs per carton:	6 pcs
Each carton :	0.068 m ³



Snail Recessed DownLight

0.5m RoHS IP20



KT6567-1


LED Brand	Bridgelux Vero13
Driver Current	500mA
Driver	AK-30W-700-D6
LED Power	23 W
Total Power	26.3 W
Luminous Flux	1772 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)



KETAI


Snail Recessed DownLight

0.5m



KT6567-2

LED Brand	Bridgelux Vero13
	BXRC-30E2000
Driver	AK-30W-700-D6
LED Power	2x23 W
Driver Current	500mA
Total Power	2x26.3 W
Luminous Flux	3500 LM
CCT	3000K
CRI	≥ 80 / 90
Beam Angle	18 ° (30 °)



E (lx)	h (m)	Ø (cm)
49027	1	25.59
12251	2	51.18
5445	3	76.76
3063	4	102.35
1960	5	127.94

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector

PACKING

Box size:	23.5 x 20.5 x 36.5 cm
Carton size:	47.5 x 37.5 x 22 cm
Pcs per carton:	2 pcs
Each carton :	0.039 m ³




A28

KETAI



29

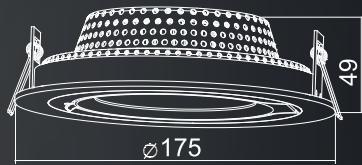Conch Recessed DownLight

TECHNICAL DATA


Input:	220-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	V.M. Reflector

KT6347B

LED Brand	Bridgelux Vero 13
Driver	BXRC-30E2000
LED Power	17 W
Driver Current	500mA
Total Power	20 W
Luminous Flux	1800 LM
CCT	3000K
CRI	> 80 / 90
Beam Angle	22 ° (18 ° / 30 °)

PACKING

Box size:	18.5 x 7.5 x 18.5 cm
Carton size:	39.5 x 38.5 x 39 cm
Pcs per carton:	20 pcs
Each carton :	0,059 m³

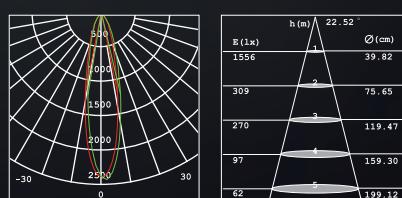

KETAI

Conch Recessed DownLight





KT6347A



KT6347



KT6347A

LED Brand	OSRAM PL-CN111-2700-830
Driver	OSRAM OTe 50/220 -240/1A0 CS
LED Power	33.8 W
Driver Current	1050mA
Total Power	35 W
Luminous Flux	2700 LM
CCT	3000K
CRI	> 80
Beam Angle	24 ° (45 °)



KT6347

Installation by:	S.A.Spring
Optics:	PMMA lens 45°
LED Brand	Nichia 3030
Driver	AK10W-24500-D5
LED Power	9W
Driver Current	350mA
Total Power	11 W
Luminous Flux	400 LM
CCT	3000K
CRI	> 80
Beam Angle	37°



TECHNICAL DATA

LED Brand	Bridgelux Vero 13
Driver	BXRC-30E2000
LED Power	17 W
Driver Current	500mA
Total Power	20 W
Luminous Flux	1800 LM
CCT	3000K
CRI	> 80 / 90
Beam Angle	22 ° (18 ° / 30 °)

PACKING

Box size:	18.5 x 7.5 x 18.5 cm
Carton size:	39.5 x 38.5 x 39 cm
Pcs per carton:	20 pcs
Each carton :	0.059 m³





A30

KETAI




Dumper Recessed DownLight

D^{0.3m} CE RoHS IP20

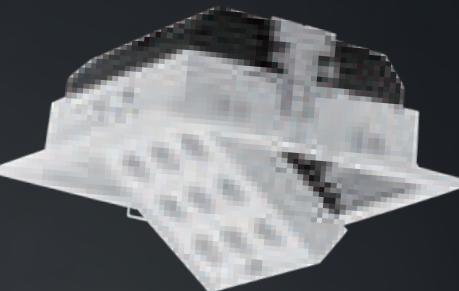

A31

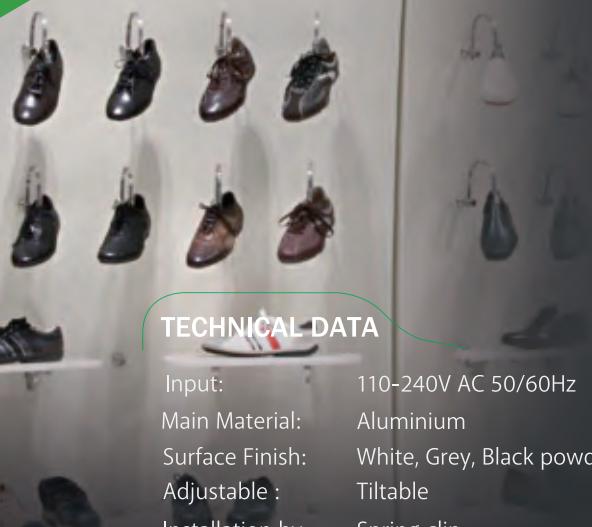

TECHNICAL DATA

Input:	110-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Tilttable
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	PMMA lens 40°

KT6355

LED Brand	CREE XT-E
LED Power	18 W
Driver	KEP0902-700-D6
Driver Current	700mA
Total Power	20 W
Luminous Flux	1400 LM
CCT	3000K
CRI	> 80
Beam Angle	67 °


PACKING

Box size:	22.5 x 19.5 x 7.5 cm
Carton size:	46.5 x 40.5 x 32 cm
Pcs per carton:	16 pcs
Each carton :	0,06 m ³

KETAI

Conch Recessed DownLight

0.3m

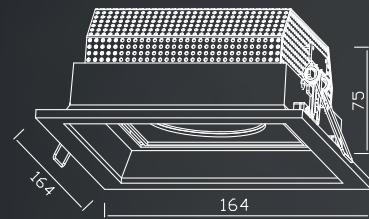

KT6355A

LED Brand	CITIZEN
	CLL032-1206A5-303M1A2
Driver	AK-30W-500-D6
LED Power	18W
Driver Current	500mA
Total Power	20W
Luminous Flux	1500 LM
CCT	3000K
CRI	> 80
Beam Angle	15 ° (25 ° / 40 °)

TECHNICAL DATA

Input:	110-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Titable
Installation by:	Spring clip
Wiring:	Terminal Block
Optics:	PMMA lens 40°

PACKING

Box size:	22.5 x 19.5 x 7.5 cm
Carton size:	46.5 x 40.5 x 32 cm
Pcs per carton:	16 pcs
Each carton :	0,06 m ³

A32

KETAI



Snail Recessed DownLight

D^{0.5in} CE RoHS □ ▽ 350 ▲ △ IP20 □ F



MH206-LED LED



Ø177



KT6627 LED



Ø165

TECHNICAL DATA

ITEM:	MH206-LED		KT6627
Input:	110-230V AC 50/60Hz		
Main Material:	Aluminium		
Surface Finish:	White, Grey, Black powder coating		
Adjustable :	Gimbal		
Installation by:	S.A.Spring		
Wiring:	Terminal Block		
Optics:	PMMA lens 40° PC Metallized Reflector		

ITEM:	MH206-LED	KT6627
LED Brand	CREE XP-E	Bridgelux
Driver	KEP0902-500A1	30E 4000F X3
LED Power	12 W	KEP40W-4310A1
Driver Current	500mA	28.9 W
Total Power	15 W	1000 mA
Luminous Flux	470 LM	33.3 W
CCT	3000K	2710 LM
CRI	> 80	3000K
Beam Angle	68 °	> 80
		15° / 24° / 60°


PACKING

Box size:	21 x 21 x 18 cm	16 x 11.5 x 6 cm
Carton size:	43.5 x 43.5 x 37.5 cm	36 x 33.5 x 26.5 cm
Pcs per carton:	8 pcs	8 pcs
Each carton :	0.071 m ³	0.032 m ³

KETAI

Conch Recessed DownLight

0.5m

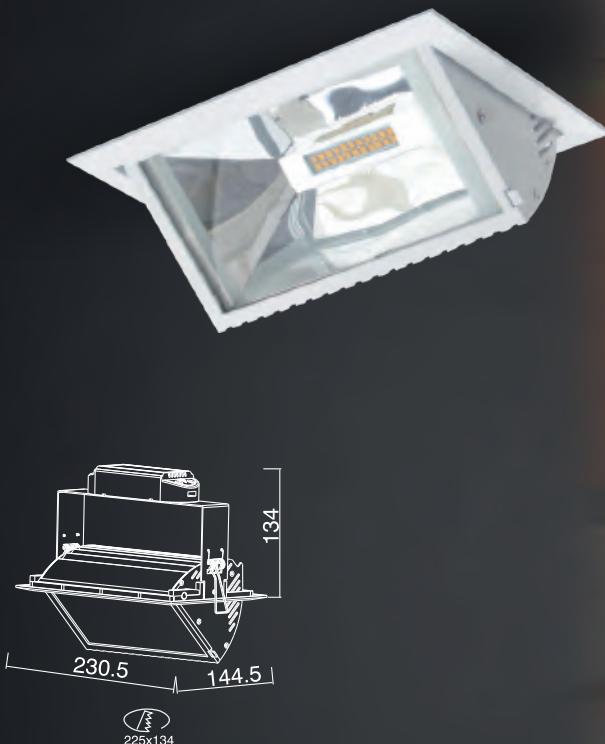

MH103-LED

LED Brand	Bridgelux 30E 4000F X3
Driver	KEP40W-4310A1
LED Power	28.9 W
Driver Current	1000mA
Total Power	33.3 W
Luminous Flux	2710 LM
CCT	3000K
CRI	> 80
Beam Angle	15 ° /24 ° /60°

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Tilttable
Installation by:	S.A.Spring
Wiring:	Terminal Block

PACKING

Box size:	22.5 x 19.5 x 7.5 cm
Carton size:	46.5 x 40.5 x 32 cm
Pcs per carton:	16 pcs
Each carton :	0,06 m ³

Cloud Recessed DownLight

KT6631



KT6632



KT6633



KT6634



A35

A36



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + PC
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	500 pcs

KT6631

LED Brand	Bridgelux V8 BXRC-30E0800
Driver	AK-10W-24500-D5
LED Power	9.8 W
Driver Current	500mA
Total Power	11.4 W
Luminous Flux	896 LM
CCT	3000K
CRI	> 80
Beam Angle	28.5 °

PACKING

Box size: 18.5 x 15.5 x 8 cm
Carton size: 48 x 38.5 x 34 cm
Pcs per carton: 24 pcs
Each carton : 0,062 m³




KT6632

LED Brand	CITIZEN CLL032-1205A5-303M1A2
Driver	AK-16W-60350-D6
LED Power	13.7 W
Driver Current	500mA
Total Power	17.5 W
Luminous Flux	1400 LM
CCT	3000K
CRI	> 80
Beam Angle	15 °/24 °/38 °/60 °

PACKING

Box size: 20.5 x 17.5 x 9 cm
Carton size: 54 x 42.5 x 29 cm
Pcs per carton: 18 pcs
Each carton : 0,067 m³



KT6633

LED Brand	CITIZEN CLL032-1208A5-303M1A2
Driver	AK-30W-700-D6
LED Power	25 W
Driver Current	500mA
Total Power	26.5 W
Luminous Flux	1980 LM
CCT	3000K
CRI	> 80
Beam Angle	15 °/24 °/38 °/60 °

PACKING

Box size: 23.5 x 19.5 x 9.5 cm
Carton size: 48.5 x 40.5 x 30.5 cm
Pcs per carton: 12 pcs
Each carton : 0,060 m³



KT6634

LED Brand	CITIZEN CLL032-1212A5-303M1A2
LED Power	36 W
Driver	KEP40W-4310A1
Total Power	40 W
Driver Current	1000 mA
Luminous Flux	3035 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	20°

PACKING

Box size: 20.5 X 20.5 X 13 cm
Carton size: 42.5 X 22 X 42 cm
Pcs per carton: 6 pcs
Each carton : 0,039 m³




Cloud Recessed DownLight

D^{0.3m} CE RoHS IP20 F

KT6664




KT6653



KT6654



KT6655

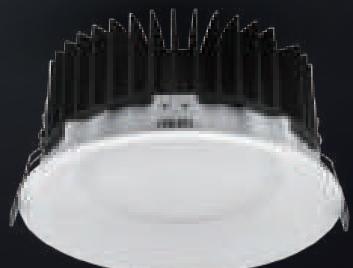**TECHNICAL DATA**

Input:	110-240V AC 50/60Hz
Main Material:	Aluminium + PC
Surface Finish:	White
Adjustable :	Fixed
Installation by:	Single Action Spring
Wiring:	Terminal Block
Optics:	OPtical diffuser panel
MOQ	216 pcs

KT6664

LED Brand	NICHIA	3030LED
LED Power	6W	
Driver	AK-10W-36330-D5	
Total Power	7W	
Driver Current	330mA	
Luminous Flux	454.12 LM	
CCT	3000K	
CRI	≥ 80	
Beam Angle	84 °	

PACKING

Box size: 19.5 x 15 x 8 cm
Carton size: 46.5 x 40.5 x 34 cm
Pcs per carton: 24 pcs
Each carton : 0,064 m³



KT6653

LED Brand	Nichia 3030
Driver	AK-16W-60350-D6
LED Power	12 W
Driver Current	500mA
Total Power	15 W
Luminous Flux	900 LM
CCT	3000K
CRI	> 80
Beam Angle	86 °

PACKING

Box size: 20.5 x 17.5 x 9 cm
Carton size: 54 x 42.5 x 29 cm
Pcs per carton: 18 pcs
Each carton : 0,067 m³




KT6654

LED Brand	Nichia 3030
Driver	AK-30W-350-D6
LED Power	20 W
Driver Current	350 mA
Total Power	22 W
Luminous Flux	1500 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	84 °

PACKING

Box size: 23.5 x 19.5 x 9.5 cm
Carton size: 48.5 x 40.5 x 30.5 cm
Pcs per carton: 12 pcs
Each carton : 0,060 m³




KT6655

LED Brand	Nichia 3030
Driver	KEP50W-4312A1
LED Power	40W
Driver Current	500mA
Total Power	45 W
Luminous Flux	2580 LM
CCT	3000K
CRI	> 80
Beam Angle	89°

PACKING

Box size: 28.5 x 24.5 x 10.5 cm
Carton size: 49.5 x 29.5 x 33.5 cm
Pcs per carton: 6 pcs
Each carton : 0,048 m³



KETAI



A39

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed / Gimbal
Installation by:	S.A.Spring
Wiring:	Flexible Wire / Striped End
Optics:	V.M. Reflector

PACKING


Box size:	10 x 10 x 8 cm
Carton size:	41 x 21 x 25.5 cm
Pcs per carton:	24 pcs
Each carton :	0.022 m ³

Starfish Recessed DownLight

D^{0.3m} C E RoHS IP20 F




KT6614




KT6613




LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	606 LM
CCT	3000K
CRI	> 80
Beam Angle	31 °

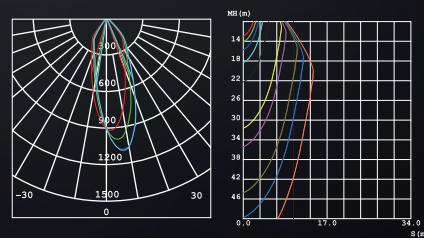

KETAI**Starfish** Recessed DownLightD^{0.3m} ECE RoHS    


KT6598

 Ø60


KT6599

 Ø69


LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	6.2 W
Driver Current	330mA
Total Power	7.5 W
Luminous Flux	606 LM
CCT	3000K
CRI	> 80 / 90
Beam Angle	31 °

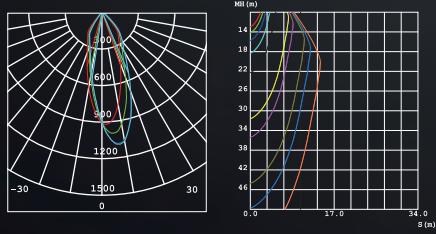**TECHNICAL DATA**

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed / Gimbal
Installation by:	S.A.Spring
Wiring:	Flexible Wire / Striped End
Optics:	V.M. Reflector

PACKING

Box size:	9.5 x 9.5 x 8 cm
Carton size:	40 x 40 x 18 cm
Pcs per carton:	24 pcs
Each carton :	0.033 m ³



KETAI




A41



Recessed DownLight

D^{0.3m} CE RoHS F



TECHNICAL DATA



Input:	1000-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	204 pcs

PACKING

Box size:	12 x 12 x 9 cm
Carton size:	37.5 x 25.5 x 38 cm
Pcs per carton:	24 pcs
Each carton :	0,037 m ³

KT6811


LED Brand	Nichia 3030
LED Power	8 W
Driver	AK-10W-24500-D5
Total Power	9 W
Driver Current	330 mA
Luminous Flux	700 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	40°



KETAI

Apollo Recessed Downlight

CE RoHS    IP20 



OSRAM




OSRAM'S High Voltage Modules

KT6666

LIGHT

LED Brand	OSRAM PrevaLED LEP-CUB-
	AC-2000-830-G1
LED Power :	28W
Luminous Flux	2000 LM
CCT	3000K
CRI	> 80
Beam Angle	55 °

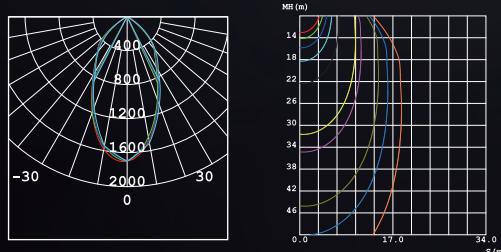

TECHNICAL DATA

Input:	220-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	204 pcs

PACKING

Box size:	20.5 x 20.5 x 16.5 cm
Carton size:	42.5 x 42.5 x 51.5 cm
Pcs per carton:	12 pcs
Each carton :	0,093 m ³

A42

KETAI



Cloud Recessed DownLight


CE RoHS IP20 F



KT6562



KT6673




TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ:	108 pcs

PACKING



Box size:	11.5 x 11.5 x 7.5 cm
Carton size:	36 x 24.5 x 32 cm
Pcs per carton:	24 pcs
Each carton :	0,029 m ³

LED Brand	Nichia NF2L757DR-E
LED Power	11W
Driver	KEP1501-350A1
Total Power	13 W
Driver Current	350 mA
Luminous Flux	800 LM
CCT	3000K
CRI	> 80
Beam Angle	100 °

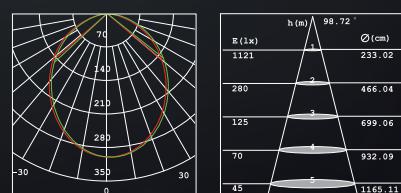


KETAI**Cloud** Recessed DownLightCE RoHS    IP20  

KT6561



KT6663

LED Brand	Nichia NF2L757DR-E
LED Power	22 W
Driver	AK-30W-700-D6
Total Power	25 W
Driver Current	700mA
Luminous Flux	1600 LM
CCT	3000K
CRI	> 80
Beam Angle	100°




h (m)	Ø (cm)
2320	100.19
580	239.16
258	478.32
145	717.46
93	956.64
	1195.80

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	108 pcs

PACKING

Box size:	16.5 x 15 x 9 cm
Carton size:	34.5 x 31.5 x 30 cm
Pcs per carton:	12 pcs
Each carton :	0,033 m ³

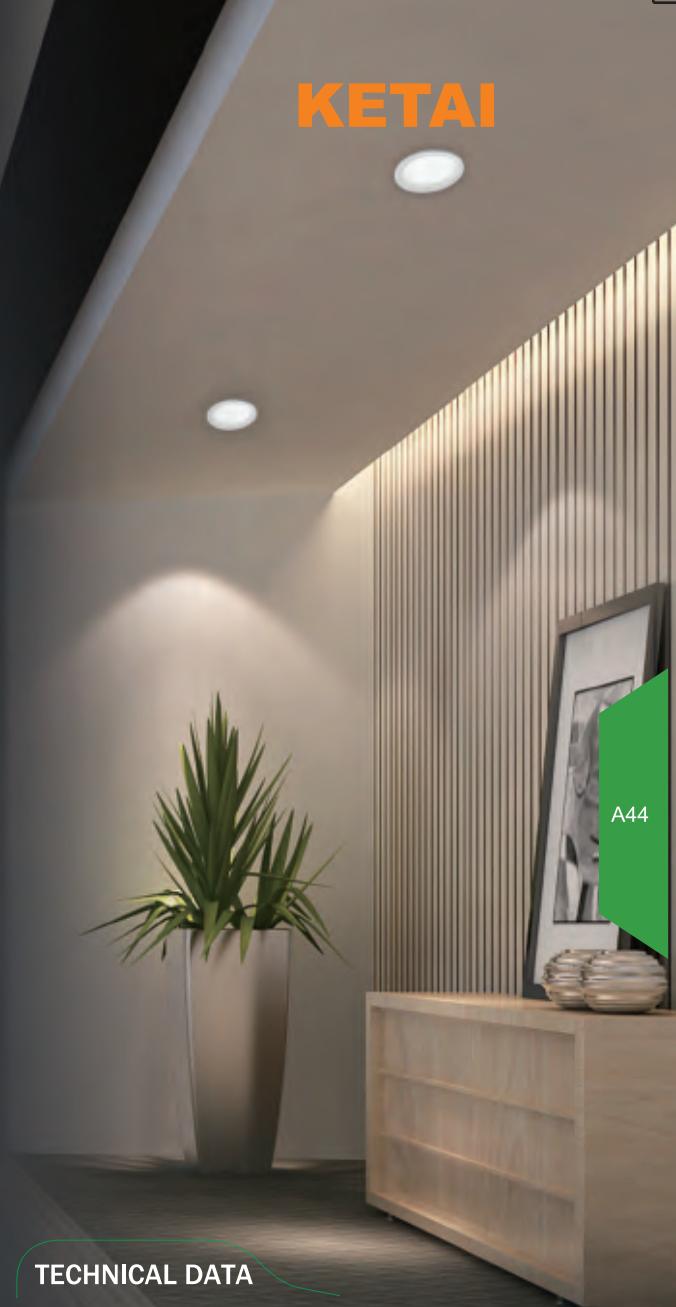


KETAI



Cloud Recessed DownLight

D^{0.3m} CE RoHS IP20 F



Ø285



KT7125



Ø285x285



KT7127

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs

PACKING



Box size:	39 x 6 x 34 cm
Carton size:	51 x 35 x 40.5 cm
Pcs per carton:	16 pcs
Each carton :	0,084 m ³

ITEM NO

LED Brand	EVerlight SMD3528
LED Power Driver	17 W 18 W AK-30W-350-D6
Total Power	20 W 22 W
Driver Current	350 mA
Luminous Flux	1000 LM 1186 LM
CCT	3000K
CRI	> 80
Beam Angle	112 °

Conch Recessed DownLight


KT7126



KT7128

**ITEM NO** KT7126

LED Brand EVerlight SMD3528 +
Citizen CLL032-1205

LED Power 17 W+13.6 W

Driver AK-30W-350-D6 +
AK-16W-60350-D6

Total Power 36 W

Driver Current 350 mA

Luminous Flux 2246 LM | 1794 LM

CCT 3000K

CRI > 80

Beam Angle 111 ° + 38 °

ITEM NO KT7128

LED Brand EVerlight SMD3528 +
Bridgelux BXRA-30E0540

LED Power 18 W+6.2 W

Driver AK-30W-350-D6 +
AK-10W-36330-D5

Total Power 30 W

Driver Current 350 mA

Luminous Flux 2246 LM | 1794 LM

CCT 3000K

CRI > 80

Beam Angle 111 ° + 38 °

PACKING KT7126

Box size: 30.5 x 30.5 x 7 cm

Carton size: 61.5 x 44 x 32.5 cm

Pcs per carton: 8 pcs

Each carton : 0,088 m³

PACKING KT7128

Box size: 30.5 x 30.5 x 8 cm

Carton size: 61.5 x 50 x 32.5 cm

Pcs per carton: 12 pcs

Each carton : 0,12 m³

TECHNICAL DATA

Input: 110-230V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating

Adjustable : Fixed

Installation by: S.A.Spring

Wiring: Terminal Block

Optics: optical diffuser panel

MOQ 112 pcs

KETAI

Cloud Recessed DownLight

D^{0.3m} CE RoHS IP20



KT6345



KT6348



KT6370


TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs

ITEM	KT6345	KT6348	KT6370
LED Brand			Everlight SMD3528
LED Power	15 W	9 W	6 W
Driver	KEP0902- 500B1	AK-10W- 36330-D5	AK-8W- 30330-D4
Total Power	18 W	11 W	9 W
Driver Current	500 mA	500 mA	330 mA
Luminous Flux	800 LM	500 LM	300 LM
CCT	3000K	3000K	3000K
CRI	> 80	> 80	> 80
Beam Angle	111 °	111 °	111 °

PACKING

	KT6345	KT6348	KT6370
Box size:	35.5x5.8x26.5 cm	27x5.3x21.5cm	19.5x6x15.5cm
Carton size:	50x37x55.5 cm	46.5x28.5x45.5cm	40.5x38.5x48.5cm
Pcs per carton:	16 pcs	16 pcs	36 pcs
Each carton :	0.025 m ³	0.0168 m ³	0,076 m ³

Conch Recessed DownLight


KT6346



KT6369



KT6371

ITEM	KT6371		KT6369		KT6346
LED Brand	Everlight SMD3528				
LED Power	5 W		12 W		18 W
Driver	AK-8W- 30330-D4		AK-10W- 36330-D5		KEP-LD18W-D1
Total Power	8 W		15 W		21 W
Driver Current	330 mA		330 mA		400 mA
Luminous Flux	250 LM		600 LM		900 LM
CCT	3000K		3000K		3000K
CRI	> 80		> 80		> 80
Beam Angle	111 °		111 °		111 °

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs

PACKING



Box size:	19.5x6 x15.5cm	27x6x22cm	39x6x34 cm
Carton size:	40.5x38.5x48.5cm	55.5x38.5x46cm	51x35x40.5 cm
Pcs per carton:	36 pcs	24 pcs	8 pcs
Each carton :	0,076 m ³	0,098 m ³	0,084 m ³



KETAI

Cloud Recessed DownLight

D^{0.3m} CE RoHS IP20 F

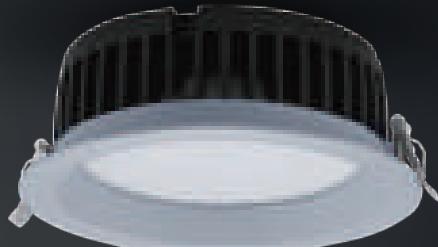

KT6621

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
MOQ	204 pcs


LED Brand	LG 5630		
LED Power	25 W	32 W	41 W
Driver	KEP36W-5307A1	KEP50W-5310A1	
Total Power	29 W	38 W	49 W
Driver Current	700 mA	700 mA	1050 mA
Luminous Flux	2241LM	2856 LM	3460 LM
CCT	4000K		
CRI	> 80		
Beam Angle	97 °		

PACKING


Box size:	28 x 26.5 x 10 cm
Carton size:	54 x 29 x 32 cm
Pcs per carton:	6 pcs
Each carton :	0,071 m ³

Topo Recessed DownLight

0.5m    



MH1097




215 x 215

MH1095


ITEM	MH1097 / MH1095
LED Brand	Nichia 3030 LED
LED Power	30W
Driver	KEP40W-4310A1
Total Power	32.5W
Driver Current	1000mA
Luminous Flux	1658.5 LM
CCT	3000K
CRI	≥ 80
Beam Angle	73 °

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	200 pcs

PACKING


Box size:	23.5 x 12.5 x 26 cm	23.5x13.5x26 cm
Carton size:	53.5 x 48.5 x 27.5 cm	53.5x48.5x31.5 cm
Pcs per carton:	8pcs	8 pcs
Each carton :	0,07m ³	0,071 m ³



R (lx)	h (m)	84.19 °	Ø (cm)
5204	2		180.70
1301	3		361.39
578	4		542.09
325	5		722.78
208			903.48

A50

KETAI

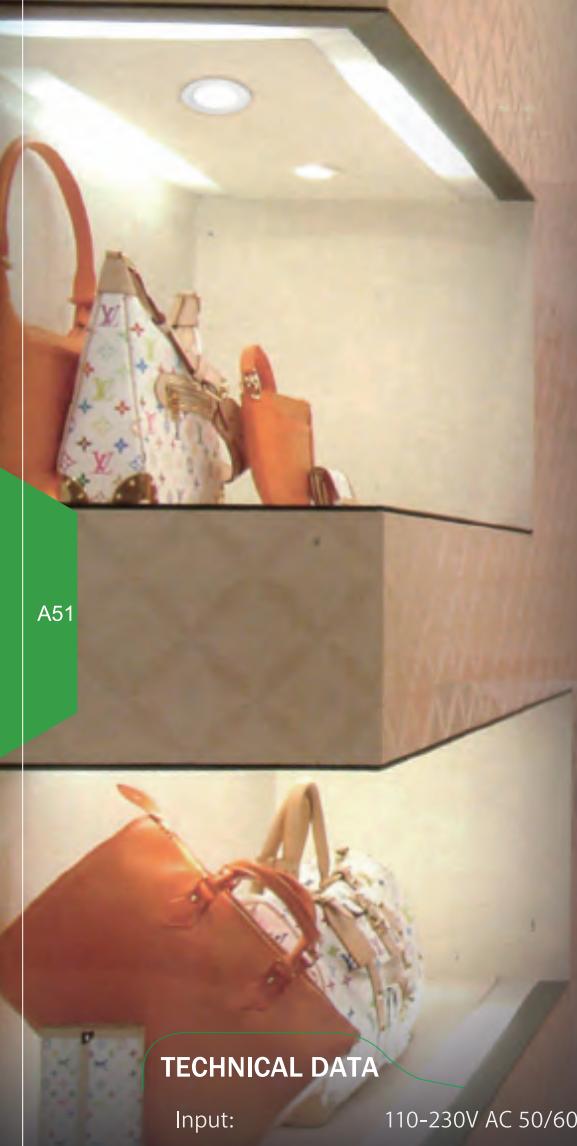


Cloud Recessed DownLight

D^{0.5m} CE RoHS



FT210C



FT210

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs

LED Brand	EVerlight SMD3528
Driver	KEP0301-350A1
Power	3 W
Driver Current	350 mA
Luminous Flux	120 LM
CCT	3000K
CRI	> 80
Beam Angle	111 °

PACKING


Box size:	7 x 7 x 3 cm
Carton size:	58 x 58 x 17 cm
Pcs per carton:	200 pcs
Each cart on :	0,057 m ³

FT210K3




Topo Recessed DownLight

0.5m




FT211C



FT211

LED Brand	EVerlight SMD3528
Driver	KEP0301-350A1
Power	3 W
Driver Current	350 mA
Luminous Flux	120 LM
CCT	3000K
CRI	> 80
Beam Angle	111 °

FT211K3



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	112 pcs

PACKING

Box size:	7 x 7 x 3 cm
Carton size:	58 x 58 x 17 cm
Pcs per carton:	200 pcs
Each carton :	0,057 m³




KETAI

Apollo Recessed DownLight


D^{0.5m} CE RoHS    



KT6618



KT6617



KT6572



Apollo Recessed Downlight

Apollo Series are a newly developed recessed downlight. Provides with high brightness OSRAM,PHILIPS LED light source, power supply from constant current driver. you can select the optimal light for every application.

Topo Recessed DownLight

0.5m



TECHNICAL DATA

KT6618

KT6617

KT6572

Input: 220-240V AC 50/60Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating

Adjustable : Fixed

Installation by: S.A.Spring

Wiring: Terminal Block

Flexible Wire /

Flexible Wire /

Optics: V.M. Reflector

Striped End

Striped End

MOQ: 108 pcs

LIGHT

LED Brand OSRAM
PrevaLED LEP-CUB-AC-2000-830-G1

PHILIPS
DLM-Int 2000lm
28W

LED Power : 28W

Integrated

Driver Osram OTP33

32W

Total Power 32W

700mA

Driver Current 700mA

1700 LM

Luminous Flux 2000 LM

3000K

CCT 3000K

> 80

CRI > 80

100 °

Beam Angle 24 ° (17 ° / 60 °)

PACKING

Box size: 20.5 x 20.5 x 16.5 cm

18 x 18 x 21 cm

18 x 18 x 21 cm

Carton size: 42.5 x 42.5 x 51.5 cm

56 x 37.5 x 44 cm

56 x 37.5 x 44 cm

Pcs per carton: 12 pcs

12 pcs


12 pcs

Each carton : 0,093 m3


0,092 m3

0,092 m3

Osram 29W



PHILIPS 28W




A54

KETAI



Recessed DownLight

D^{0.3in} CE RoHS IP20 F

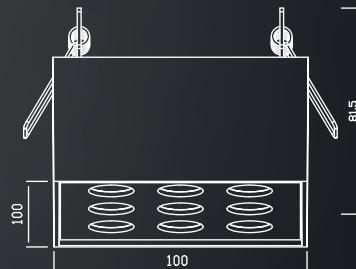


KT6808A

TECHNICAL DATA

Input:	100-240 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	216 pcs

LED Brand	Bridgelux
V8 BXRE-30E0800	
LED Power	9 W
Driver	AK-10W-24500-D5
Total Power	12 W
Driver Current	500 mA
Luminous Flux	850 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	50° / 30°

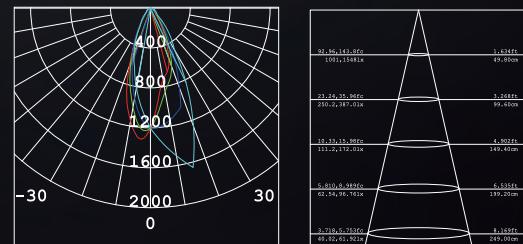

PACKING

Box size:	12.5 x 12.5 x 10.5 cm
Carton size:	52 x 26.5 x 33.5 cm
Pcs per carton:	24 pcs
Each carton :	0,046 m ³

Recessed DownLight KETAI




KETAI BRIGHTENS YOUR LIFE

KETAI



Recessed DownLight

0.3m



KT6808B

LED Brand	CLL032
	-1205
LED Power	15 W
Driver	KEP-LD18W-D1
Total Power	16 W
Driver Current	320 mA
Luminous Flux	1185 LM
CCT	3000 K
CRI	> 80
Beam Angle	50° / 30°



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	204 pcs

PACKING

Box size:	12.5 x 12.5 x 10.5 cm
Carton size:	52 x 26.5 x 33.5 cm
Pcs per carton:	24 pcs
Each carton :	0,046 m ³



KETAI




Recessed DownLight

D^{0.3in} CE RoHS IP20



A57




KT6808C

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	216 pcs

LED Brand	CLL032
	-1205
LED Power	14 W
Driver	KEP-LD18W-D1
Total Power	16 W
Driver Current	320 mA
Luminous Flux	1185 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	50° / 30°


PACKING

Box size:	12.5 x 12.5 x 10.5 cm
Carton size:	52 x 26.5 x 33.5 cm
Pcs per carton:	24 pcs
Each carton :	0,046 m ³

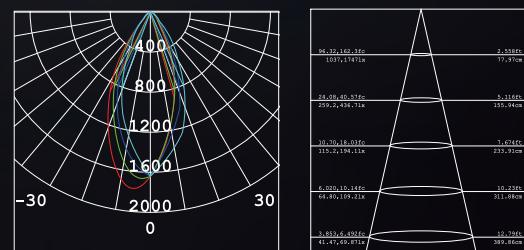


Cloud Recessed DownLight

0.5m

**KT6563**

LED Brand	Bridgelux Vero13 BXRC-30E2000
Driver	KEP30W-700A1
Power	26.3 W
Driver Current	700 mA
Luminous Flux	1772 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)



Z (lx)	Ø (cm)
49027	25.59
12251	51.18
5445	76.76
3063	102.35
1960	127.94

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ:	200 pcs

PACKING

Box size:	19.5 x 16.5 x 9 cm
Carton size:	39.5 x 34.5 x 29 cm
Pcs per carton:	12 pcs
Each carton :	0,04 m³



A58

KETAI





Drum Recessed DownLight

D^{0.5m} CE RoHS IP20 F □



A59

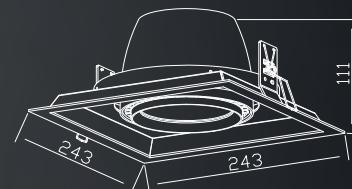

225 x 225

TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ:	204 pcs

KT6679-1

LED Brand	CITIZEN
LED Power	37.5 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2830 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24 °

PACKING

Box size:	28.5 x 28.5 x 13.5 cm
Carton size:	58.5 x 29.5 x 42.5 cm
Pcs per carton:	6 pcs
Each carton :	0,073 m ³


KETAI

Drum

Recessed DownLight



D^{0.5m} CE RoHS

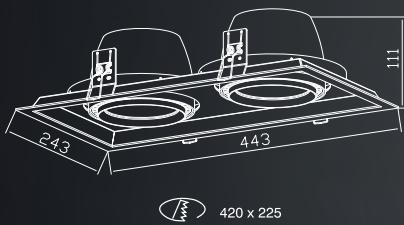

KT6679-2

LED Brand	CITIZEN
	CLU034-1208B8-303M1A2
LED Power	2 x 37.5 W
Driver	KEP50W-5310A1
Total Power	2 x 43 W
Driver Current	1050 mA
Luminous Flux	5711 LM
CCT	3000 K
CRI	> 80 / 90
Beam Angle	24 °

TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING


Box size:	48.5 x 28.5 x 13.5 cm
Carton size:	49.5 x 29.5 x 56 cm
Pcs per carton:	4 pcs
Each carton :	0,082 m ³

KETAI



Drum Recessed DownLight

D^{0.5m} CE RoHS IP20 F □



KT6673

TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs

KT6673

LED Brand	CITIZEN
	CLU034-1208B8-303M1A2
LED Power	37.5 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2830 LM
CCT	3000 K
CRI	> 80 / 90
Beam Angle	24 °

PACKING

Box size:	26 x 26 x 17.5 cm
Carton size:	53.5 x 27 x 54.5 cm
Pcs per carton:	6 pcs
Each carton :	0,078 m ³

KETAI

Durm Recessed DownLight



0.5m CE RoHS IP20



KT6667

LED Brand	CITIZEN
	CLU034-1208B8-303M1A2
LED Power	37.5 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2830 LM
CCT	3000 K
CRI	≥80 / 90
Beam Angle	24 °

TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	24 x 24 x 15 cm
Carton size:	49.5 x 25 x 47 cm
Pcs per carton:	6 pcs
Each carton :	0,058 m ³





KETAI



Drum Recessed DownLight

D_{0.5m} CE RoHS IP20 F □



TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	W/wire
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING

Box size:	20.5 x 20.5 x 12 cm
Carton size:	42.5 x 21.5 x 50cm
Pcs per carton:	8 pcs
Each carton :	0,046 m ³

KT6809

LED Brand	CITIZEN
LED Power	37 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2955 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24 °


KETAI**Durm**

Recessed DownLight

G^{0.5m}

CE

RoHS



KT6810

LED Brand	CITIZEN
	CLU034-1208B8-303M1A2
LED Power	37.5 W
Driver	KEP50W-5310A1
Total Power	43 W
Driver Current	1050 mA
Luminous Flux	2955 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24 °

TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING


Box size:	25.5 x 22 x 11.5 cm
Carton size:	45.5 x 26.5 x 48.5 cm
Pcs per carton:	8 pcs
Each carton :	0.058 m ³

KETAI



A65

Cone Recessed DownLight



KT6697

TECHNICAL DATA

Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs


LED Brand LUMINUS
CXM18

LED Power 37.8 W
Driver KEP40W-4310A1
Total Power 40 W
Driver Current 1000 mA
Luminous Flux 3224 LM
CCT 3000 K
CRI ≥ 80/90
Beam Angle 15° / 24°





PACKING

Box size: 21 x 21 x 10 cm
Carton size: 43.5 x 43.5 x 32 cm
Pcs per carton: 12 pcs
Each carton : 0,06 m³

KETAI**Cone** Recessed DownLight0.5m **CE** **RoHS** **KT6698**

LED Brand	LUMINUS
	CXM18
LED Power	37.8 W
Driver	KEP40W-4310A1
Total Power	40 W
Driver Current	1000 mA
Luminous Flux	3225 LM
CCT	3000 K
CRI	≥ 80/90/95
Beam Angle	15° / 24°

**TECHNICAL DATA**

Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	23 x 21 x 11.5 cm
Carton size:	47.5 x 43.5 x 36.5 cm
Pcs per carton:	12 pcs
Each carton :	0.075 m ³


KETAI



A67



Cone Recessed DownLight



KT6696

TECHNICAL DATA

Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs

LED Brand LUMINUS CXM18

LED Power 37.8 W

Driver KEP40W-4310A1

Total Power 40 W

Driver Current 1000 mA

Luminous Flux 3223 LM



CCT 3000 K

CRI ≥ 80 / 90

Beam Angle 15° / 24°


PACKING

Box size:	21 x 21 x 14 cm
Carton size:	43.5 x 43.5 x 44 cm
Pcs per carton:	12 pcs
Each carton :	0,038 m ³



Recessed DownLight

CE RoHS IP20



KT6695

LED Brand	CREE CXA1816
LED Power	25.9 W
Driver	AK-30W-700-D6
Total Power	26.4 W
Driver Current	700 A
Luminous Flux	1788.2 LM
CCT	2700 K
CRI	≥ 80 / 90
Beam Angle	13 °

TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	W/wire
Optics:	V.M. Reflector
MOQ	204 pcs

PACKING

Box size:	17 x 17 x 14 cm
Carton size:	35.5 x 35.5 x 44 cm
Pcs per carton:	12 pcs
Each carton :	0,055 m ³


A68

KETAI



Recessed DownLight

D^{0.3in} CE RoHS IP20



A69




TECHNICAL DATA

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	216 pcs

KT6815

LED Brand	Bridgelux
LSP01-601-830-230	
LED Power	8 W
Driver	AK-10W-24500-D5
Total Power	8 W
Driver Current	500 mA
Luminous Flux	602 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	40°



PACKING


Box size:	16 x 11.5 x 10 cm
Carton size:	36 x 33.5 x 42 cm
Pcs per carton:	24 pcs
Each carton :	0,05 m ³

KETAI

Recessed DownLight




D^{0.3m} CE RoHS



KT6816-1




KT6816-2




KT6816-1

LED Brand	Bridgelux LSP01-601-830-230
Total Power	8 W
Luminous Flux	602 LM
CCT	3000 K
CRI	> 80
Beam Angle	40°



KT6816-2



TECHNICAL DATA

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	216 pcs

PACKING

Box size:	20.5 x 20.5 x 16.5 cm
Carton size:	42.5 x 42.5 x 51.5 cm
Pcs per carton:	12 pcs
Each carton :	0,093 m ³

KETAI

A71



KETAI




Recessed DownLight


D^{0.3in} CE RoHS IP20 F



KT6817



KT6818



TECHNICAL DATA

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed!
Installation by:	S.A.Spring
Wiring:	W / Terminal Block
Optics:	V.M.Reflector
MOQ	216 pcs

LED Brand	Bridgelux VER08
LED Power	7 W
Driver	KER-0901-350A1
Total Power	10 W
Driver Current	330 mA
Luminous Flux	615 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	50° / 30°

PACKING

Box size:	16 x 11.5 x 10 cm
Carton size:	36 x 33.5 x 42 cm
Pcs per carton:	24 pcs
Each carton :	0,05 m ³


KETAI



Recessed DownLight

D_{0.3m} CE RoHS IP20 F

A73



TECHNICAL DATA

Input:	220-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White,Grey,Black
Adjustable :	Fixed
Installation by:	Leaf clip
Wiring:	Terminal Block
Optics:	V.M.Reflektor
MOQ	200 pcs

KT6343C

LED Brand	Bridgelux Vero18	KT6343B
	BXRC-30E4000-F-02	Bridgelux Vero 18
LED Power	24/27/31W	BXRC - 30E4000 - F - 02
Driver	OTE 35/220-240/1A0 CS	34 W / 37 W / 42 W
Total Power	27/31/35W	OTE 50 / 220 - 240 / 1A4 CS
Driver Current	800/925/1050mA	38 W / 42 W / 47 W
Luminous Flux	2100/2310/2800LM	1150 / 1250 / 1400 mA
CCT	3000 K	38 W / 42 W / 47 W
CRI	≥80	1150 / 1250 / 1400 mA
Beam Angle	65 ° (Optional 40 ° /24 ° /13 °)	3247 / 3566 / 3833 LM

PACKING

Box size:	26.5 x 20 x 15.5 cm
Carton size:	54.5 x 41.5 x 33 cm
Pcs per carton:	8 pcs
Each carton :	0,075 m ³

KETAI



Recessed DownLight



0.3m CE RoHS IP20 F

**KT6813A**

LED Brand	CREE
	CXA1830-830-T2
LED Power	29.6 W / 34.2 W / 38 W
Driver	OSRAM OTE 50/220-240/1AO CS
Total Power	34.1 W / 39 W / 45 W
Driver Current	800 / 925 / 1050 mA
Luminous Flux	2654 LM / 2954 LM / 3254 LM
CCT	3000K
CRI	≥80
Beam Angle	46 °



TECHNICAL DATA

Input:	220-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	Black/White/Grey
Adjustable :	Fixed
Installation by:	Single Action Spring
Wiring:	Terminal Block
Optics:	V.M.Reflektor
MOQ	200 pcs

PACKING

Box size:	23.5 x 21 x 15.5 cm
Carton size:	48.5 x 43.5 x 33 cm
Pcs per carton:	8 pcs
Each carton :	0,070m ³

KETAI



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Titatable
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	PMMA lens+glass
MOQ	200 pcs

PACKING


Box size:	9.5 x 9.5 x 9.5 cm	11.7 x 11.7 x 10 cm
Carton size:	49.5 x 21 x 20.5 cm	60.5 x 25x 55.5 cm
Pcs per carton:	50 pcs	50 pcs
Each carton :	0,052 m ³	0,051 m ³

Galaxy Recessed DownLight

D^{0.5m} CE RoHS



KT6520





KT6524





KT6520

LED Brand	Nichia 3030
Driver	KEP0301-350B1
Power	3 W
Driver Current	350 mA
Luminous Flux	180 LM
CCT	3000K
CRI	> 80
Beam Angle	37 °




KT6524

LED Brand	Nichia 3030
Driver	AK10W-36330-D5
Power	6W
Driver Current	350 mA
Luminous Flux	350 LM
CCT	3000K
CRI	> 80
Beam Angle	37 °




KETAI**Sealion** Recessed DownLight

0.5m IP20

**KT6525**

LED Brand	Nichia 3030
Driver	AK10W-36330-D5
Power	9W
Driver Current	350 mA
Luminous Flux	520 LM
CCT	3000K
CRI	> 80
Beam Angle	37 °

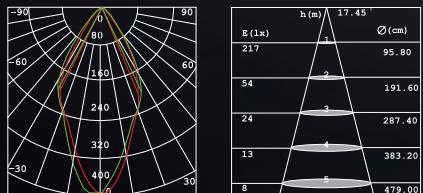**TECHNICAL DATA**

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Titable
Installation by:	S.A.Spring
Wiring:	Terminal Block
Optics:	PMMA lens+glass
MOQ	200 pcs

PACKING

Box size:	16 x 16 x 12 cm
Carton size:	50 x 33.5x 51 cm
Pcs per carton:	24 pcs
Each carton :	0,085 m ³




KETAI



Recessed DownLight

D^{9.5in} CE RoHS IP20 F II



TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Black, Grey
Adjustable :	Fixed
Installation by:	Single Acticon Spring
Wiring:	W/wire
Optics:	Optical diffuser panel
MOQ	216 pcs

PACKING

Box size:	24.5 x 14 x 29 cm
Carton size:	44 x 26 x 60.5 cm
Pcs per carton:	6 pcs
Each carton :	0,069 m ³

MH1088A

LED Brand	Nichia
	MH1096
LED Power	30 W
Driver	LCC30W1000-230
Total Power	32 W
Driver Current	1000 mA
Luminous Flux	2225.1 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	79 °

Recessed DownLight



MH1088B

LED Brand	OSRAM PL-CUBE-AC-2000-8300-230V-G2
LED Power	22 W
Total Power	24 W
Driver Current	1000 mA
Luminous Flux	1546.2 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	72 °



TECHNICAL DATA

Input:	320 V
Main Material:	Aluminium + Steel
Surface Finish:	White, Black, Grey
Adjustable :	Fixed
Installation by:	Single Acticon Spring
Wiring:	W/wire
Optics:	Optical diffuser panel
MOQ	216 pcs

PACKING

Box size:	24.5 x 14 x 29 cm
Carton size:	44 x 26 x 60.5 cm
Pcs per carton:	6 pcs
Each carton :	0,069 m³



OBEY YOUR VISION, RELISH THE MOMENT

KETAI



Snail Tracklight

D^{0.3m} CE RoHS 350° IP20 F




TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	29 x 24 x 10.5 cm
Carton size:	59.5 x 49.5 x 33.5 cm
Pcs per carton:	12 pcs
Each carton :	0,098 m ³



MHT8584

LED Brand	CITIZEN
CLU034-1206B8-303M1A2	
LED Power	25 W Max
Driver	AK30W-700-D6
Total Power	30 W Max
Driver Current	700 mA
Luminous Flux	2072 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	18° / 30°

KETAI

Tracklight

0.3m



MHT8584A

TECHNICAL DATA



Input:	110-230 V AC 50 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs

LED Brand CITIZEN
CLL163

Total Power 22 W
Luminous Flux 1993 LM
CCT 3000 K
CRI ≥80
Beam Angle 24 °

PACKING

Box size: 24.5*20*10 cm
Carton size: 41.5*25.5*42 cm
Pcs per carton: 8 pcs
Each carton : 0,044 m³



KETAI



Snail Tracklight


D^{0.3m} CE RoHS 350 IP20 F

● Passive cooling



TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	200 pcs

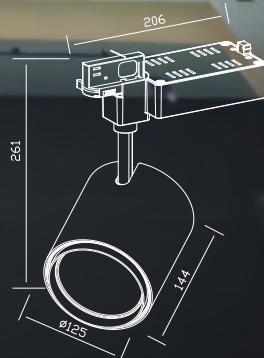

MHT8585

LED Brand	CITIZEN
CLU034-1208B8-303M1A2	
LED Power	36 W Max
Driver	HEP-LTC40W1000 UNI
Total Power	40 W Max
Driver Current	1000 mA
Luminous Flux	3693 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24°

PACKING

Box size:	31 x 24 x 13.5 cm
Carton size:	49.5 x 32 x 56 cm
Pcs per carton:	8 pcs
Each carton :	0,088 m ³

KETAI

Sealion Tracklight



B04

TECHNICAL DATA


Input:	230V AC 50Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M. Reflector

MHT8585A

LED Brand	CITIZEN
	CLL360
Total Power	34 W
Luminous Flux	2741 LM
CCT	3000K
CRI	> 80
Beam Angle	24 °

PACKING

Box size:	19.5 x 14 x 11 cm
Carton size:	57 x 40.5 x 29.5 cm
Pcs per carton:	20 pcs
Each carton :	0.030 m ³

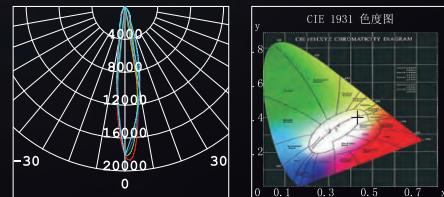

KETAI



Snail Tracklight

D^{0.3m} CE RoHS 350° IP20 F

● Passive cooling




B05

TECHNICAL DATA

Input:	110-240 V AC 50 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	32.5 x 24 x 15.5 cm
Carton size:	49.5 x 33.5 x 48.5 cm
Pcs per carton:	6 pcs
Each carton :	0,08 m ³



MHT8586

LED Brand	ZITIZEN
LED Power	CLU044-1212B8-303M1A2
Driver	55 W Max
Total Power	HEP-LTC60W1500 UNI
Driver Current	1500 mA
Luminous Flux	60 W Max
CCT	5583 LM
CRI	3000 K
Beam Angle	≥ 80 / 90
	24°



Snail Tracklight



TECHNICAL DATA

Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	PMMA lens
MOQ:	100 pcs



PACKING

Box size:	33.5 x 21 x 9.5 cm
Carton size:	43.5 x 34.5 x 50 cm
Pcs per carton:	10 pcs
Each carton :	0,075 m ³

Item	MHT8556	MHT8556H
Input:	110-230V AC 50/60Hz	220-240V AC 50/60Hz
LED Brand	Osram	Osram
CT11B-W4F-830-L24		PL-CN11AC-G1
LED Power	26 W	22.5 W
Driver	AK-30W-700-D6	AC
Total Power	29 W	25 W
Driver Current	700mA	700mA
Luminous Flux	1780 LM	1850 LM
CCT	3000K	3000K
CRI	> 80	> 80
Beam Angle	24°	24°

KETAI

Snail Tracklight




TECHNICAL DATA

Input:	230V AC 50Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	adaptor
Wiring:	Track adaptor
Optics:	V.M. Reflector

PACKING

Box size:	33 x 21.1 x 8 cm
Carton size:	44.5 x 34 x 38 cm
Pcs per carton:	8 pcs
Each carton :	0.051 m ³

LED Brand	Bridgelux Vero13 BXRC-30E2000
LED Power	23 W
Driver	AK-30W-700-D6
Driver Current	700mA
Total Power	26.3 W
Luminous Flux	1772 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)

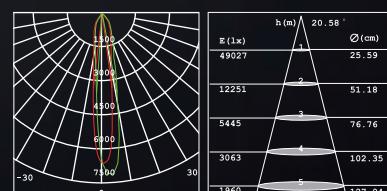

KETAI

Snail Tracklight



TECHNICAL DATA


ITEM:	MHT8664		MHT8704
Input:	230V AC 50Hz		
Lamp Type:	GX8.5 HIR111-CE-P 70W		G53 QR111 70W
Main Material:	Aluminium		
Surface Finish:	White, Grey, Black powder coating		
Adjustable :	Gimbal		
Installation by:	W/ adaptor		
Wiring:	Track adaptor		
Optics:	V.M. Reflector		

PACKING

Box size:	29x20.5x13.5 cm		33 x 21.1 x 8 cm
Carton size:	42.5x30x56.5cm		44.5 x 34 x 38 cm
Pcs per carton:	8 pcs		8 pcs
Each carton :	0,072 m ³		0.051 m ³



MHT8664 Gx8.5



MHT8704 G53 QR111

KETAI

Snail Tracklight

MHT8663 G12

MHT8703 HIPAR30


B09

TECHNICAL DATA


ITEM:	MHT8663
Input:	230V AC 50Hz
Lamp Type:	G12 HIT-CE 70W
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	Track adaptor
Optics:	V.M. Reflector
Reflecting cup angle:	20 ° / 44 ° / 60 °

MHT8703

E27 HIPAR30
70W



MHT8663 G12



MHT8703 HIPAR30

PACKING

Box size:	25.3 x 17.1 x 13 cm
Carton size:	52.3 x 52.3 x 28.5 cm
Pcs per carton:	12 pcs
Each carton :	0.078 m³

KETAI

Sealion Tracklight

CE RoHS 350 IP20 F



● Passive cooling
Patent product / 专利产品




B10

TECHNICAL DATA

Input:	220-240 V AC 50 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING

Box size:	24 x 22 x 21 cm
Carton size:	49.5 x 45.5 x 44 cm
Pcs per carton:	8 pcs
Each carton :	0,099 m ³

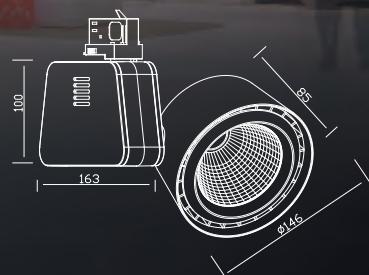

MHT8583

LED Brand	LUMINUS CXM18
LED Power	37.8 W
Driver	KEP40W-4310A1
Total Power	40 W
Driver Current	1000 mA
Luminous Flux	3222 LM
CCT	3000 K
CRI	≥ 80/90/95
Beam Angle	15° / 24°

KETAI



Tracklight



B11




TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	24.5*20*10 cm
Carton size:	41.5*25.5*42 cm
Pcs per carton:	8 pcs
Each carton :	0,044 m ³



HKTA8582

LED Brand	CITIZEN
LED Power	25 W
Driver	XTC32-0700P-UNV-A
Total Power	30 W
Driver Current	700 mA
Luminous Flux	2250 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24 °

Tracklight



TECHNICAL DATA


Input:	230V AC 50Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M. Reflector

MHT8588

LED Brand	Bridgelux
LSP01-601-830-230	
LED Power	8 W
Driver	
Driver Current	500 mA
Total Power	8 W
Luminous Flux	602 LM
CCT	3000K
CRI	> 80
Beam Angle	40 °


PACKING

Box size:	19.5 x 14 x 11 cm
Carton size:	57 x 40.5 x 29.5 cm
Pcs per carton:	20 pcs
Each carton :	0.030 m ³

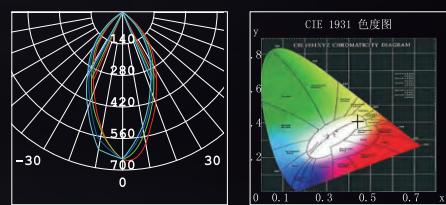

Tracklight



MHT8544-LED


TECHNICAL DATA

Input:	100-240V
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	200 pcs

LED Brand	CITIZEN CLU034-1205B8-303M1A2
LED Power	23 W
Driver	AK-30W-700-D6
Total Power	25 W
Driver Current	700 mA
Luminous Flux	1921.3 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24 °

PACKING


Box size:	33 x 25 x 13.5 cm
Carton size:	51.5 x 34.5 x 42.5 cm
Pcs per carton:	6 pcs
Each carton :	0,075 m ³

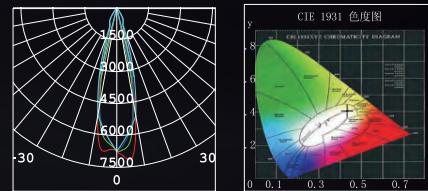

KETAI

Tower Tracklight

D^{0.3m} CE RoHS

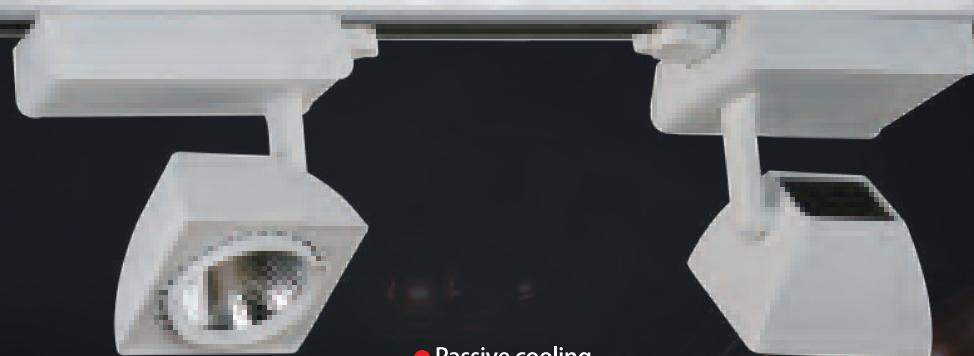

● Passive cooling

Patent product / 专利产品




B14

TECHNICAL DATA

Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	26 x 26 x 13 cm
Carton size:	53.5 x 27 x 41 cm
Pcs per carton:	6 pcs
Each carton :	0,059 m ³




MHT8579

LED Brand	CITIZEN
	CLU034-1208B8-303M1A2
LED Power	33 W
Driver	OTE-50-220-240-1AO-CS
Total Power	37 W
Driver Current	925 mA
Luminous Flux	3150 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	28 °

KETAI

Sealion Tracklight



MHT8540

Input:	110-230V AC 50/60Hz	LED Brand	Bridgelux BXRA-30E4000
Main Material:	Aluminium	LED Power	44W
Surface Finish:	White, Grey, Black powder coating	Driver	KEP-55W-BFAN
Adjustable :	Gimbal	Total Power	50W
Installation by:	W/4 Wire Track Adaptor	Driver Current	1800mA
Wiring:	Connect toTrack W/Adaptor	Luminous Flux	3350 LM
Optics:	V.M. Reflector	CCT	3000K
MOQ	120 pcs	CRI	> 80
		Beam Angle	46 °

PACKING


Box size: 33 x 25 x 13.5 cm
Carton size: 52 x 34.5 x 43.5 cm
Pcs per carton: 6 pcs
Each carton : 0,078 m³



Sealion Tracklight



B16




MHT8548

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/4 Wire Track Adaptor
Wiring:	Connect to Track W/Adaptor
Optics:	V.M. Reflector
MOQ	120 pcs

LED Brand	Bridgelux V10 BXRE-30E1000
LED Power	13.2 W
Driver	KEP0902-500-D6
Total Power	15.8 W
Driver Current	350mA
Luminous Flux	1126 LM
CCT	3000K
CRI	> 80
Beam Angle	16°

PACKING

Box size:	26.5 x 23 x 10.5 cm
Carton size:	54.5 x 47.5 x 33 cm
Pcs per carton:	12 pcs
Each carton :	0.085 m ³

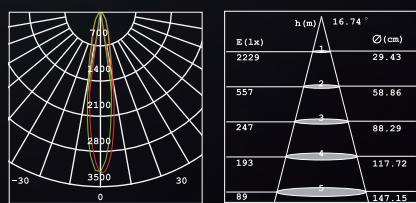

KETAI

Sealion Tracklight




B17

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	V.M. Reflector
MOQ	102 pcs

PACKING

Box size:	27.5 x 26.5 x 14.5 cm
Carton size:	54.5 x 28.5 x 45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,07 m ³



MHT8148-LED


LED Brand	Bridgelux
	BXRC-30E4000-F-02
LED Power	35W
Driver	LTC40W1200 UNI
Total Power	40W
Driver Current	1200mA
Luminous Flux	3000 LM
CCT	3000 K
CRI	> 80
Beam Angle	24 °

Sealion TracklightD^{1.0m} C E RoHS 350 IP20 F

B18

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	V.M. Reflector
MOQ	102 pcs

**MHT8148**

Lampholder type:	G12
Lamp Type:	HIT-CE Max 70W
Control Gear:	Electronic HID ballast 230V 70W
Installation :	W/Track Adaptor
Wiring:	Connect to Track w/ adaptor
Diffuser:	3mm tempered center-frosted glass

PACKING

Box size:	27.5x26.5x14.5 cm
Carton size:	54.5x28.5x45.5 cm
Pcs per carton:	6 pcs
Each carton :	0.07 m ³

KETAI

Sealion Tracklight




TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	V.M. Reflector
MOQ	102 pcs

PACKING


Box size:	27.5x26.5x14.5 cm
Carton size:	54.5x28.5x45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,07 m ³



MHT8667A

Lampholder type:	G12
Lamp Type:	HIT-CE Max 70W
Control Gear:	Electronic HID ballast 230V 70W
Installation :	W/Track Adaptor
Wiring:	Connect to Track w/ adaptor
Diffuser:	3mm tempered center-frosted glass

Sealion Tracklight



B20




MHT8555

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	ano. reflector
MOQ:	102 pcs

PACKING

Box size:	33.5 x 21 x 17.5 cm
Carton size:	43.5 x 32.5 x 54.5 cm
Pcs per carton:	6 pcs
Each carton :	0,077 m ³

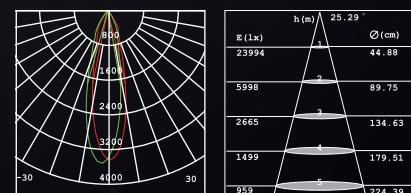

KETAI




Sealion Tracklight

D^{0.3m} CE RoHS 350° IP20 F



- Passive cooling
- Patent product / 专利产品



MHT8573

TECHNICAL DATA

Input:	100-240V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	V.M. Reflector
MOQ	204 pcs

LED Brand	Bridgelux
	BXRC-30E4000-F-03
LED Power	37/46W
Driver	LTC40W1200 UNI / LTC60W1500 UNI
Total Power	40/50W
Driver Current	1200/1500mA
Luminous Flux	3350/3800 LM
CCT	3000K
CRI	>80
Beam Angle	15 ° / 25 ° / 60 °

PACKING

Box size:	27.5 x 26.5 x 14.5 cm
Carton size:	54.5 x 28.5 x 45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,07 m ³




KETAI
Drum Tracklight

D^{0.3m} CE RoHS 350 IP20 F



- Passive cooling
Patent product / 专利产品

B22



TECHNICAL DATA

Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	27.5 x 26 x 14.5 cm
Carton size:	53.5 x 28.5 x 45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,057 m ³

MHT8575

LED Brand	CITIEN
LED Power	41 W
Driver	OTe 50/220-240/1A4 CS(OSRAM)
Total Power	47 W
Driver Current	1150 mA
Luminous Flux	3362 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	12 ° / 22 ° / 36 °



B23

MHT8527




TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/3 wire track adaptor
Wiring:	Terminal Block
Optics:	Anodized aluminium Reflector

LED Brand	Bridgelux V10 BXRE-30E1000	
LED Power	9.5W	12.3W
Driver	AK-10W-36330-D5	KEP-LD18W-D1
Total Power	11.7 W	15.8 W
Driver Current	350mA	500mA
Luminous Flux	737 LM	1126 LM
CCT	3000K	
CRI	> 80	
Beam Angle	33 ° (60 °)	

PACKING

Box size:	16.5 x 16.5 x 23 cm
Carton size:	51.5 x 47.5 x 35.5 cm
Pcs per carton:	4 pcs
Each carton :	0,086 m ³

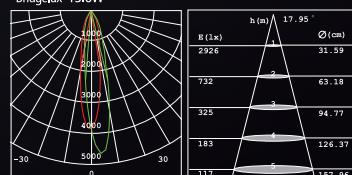

Pipe Round Tracklight



B24

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/3 wire track adaptor
Wiring:	Terminal Block
Optics:	Anodized aluminium Reflector

MHT8562

LED Brand	Bridgelux
	V10 BXRE-30E1000
LED Power	12.3 W
Driver	KEP0902-500-D6
Total Power	15.8 W
Driver Current	350mA
Luminous Flux	1126 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)

PACKING

Box size:	17.5 x 10 x 24 cm
Carton size:	54.5 x 21.5 x 26.5 cm
Pcs per carton:	6 pcs
Each carton :	0,086 m ³

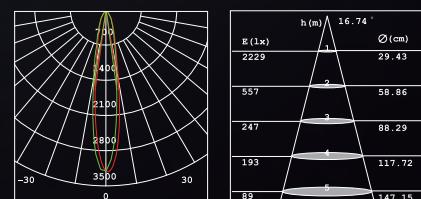

KETAI

Pipe Round Tracklight



TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/3 wire track adaptor
Wiring:	Terminal Block
Optics:	Anodized aluminium Reflector

PACKING

Box size:	18.3 x 9.1 x 22.5 cm
Carton size:	57 x 20 x 25 cm
Pcs per carton:	6 pcs
Each carton :	0,086 m ³

MHT8572

LED Brand	Bridgelux Vero13 BXRC-30E2000
LED Power	23 W
Driver	AK-30W-700-D6
Driver Current	700mA
Total Power	26.3 W
Luminous Flux	1772 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)



$E(1\pi)$	$h (m)$	$\varnothing (cm)$
1000	1	31.59
2000	2	63.18
3000	2	94.77
4000	4	126.37
5000	4	157.96
-30	117	

Pipe Round Tracklight


B26

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/3 wire track adaptor
Wiring:	Terminal Block
Optics:	Anodized aluminium Reflector

PACKING


Box size:	18.3 x 9.1 x 22.5 cm
Carton size:	57 x 20 x 25 cm
Pcs per carton:	6 pcs
Each carton :	0,086 m ³

MHT8561

LED Brand	Bridgelux
LED Power	V10 BXRE-30E1000
Driver	13.6 W
Driver Current	KEP0902-500-D6
Total Power	15.8 W
Luminous Flux	500mA
CCT	1126 LM
CRI	3000K
Beam Angle	> 80
	18 ° (30 °)



h (m)	θ (°)	ϕ (cm)
2.229	1	29.43
557	2	58.86
247	3	88.29
193	4	117.72
89	5	147.15

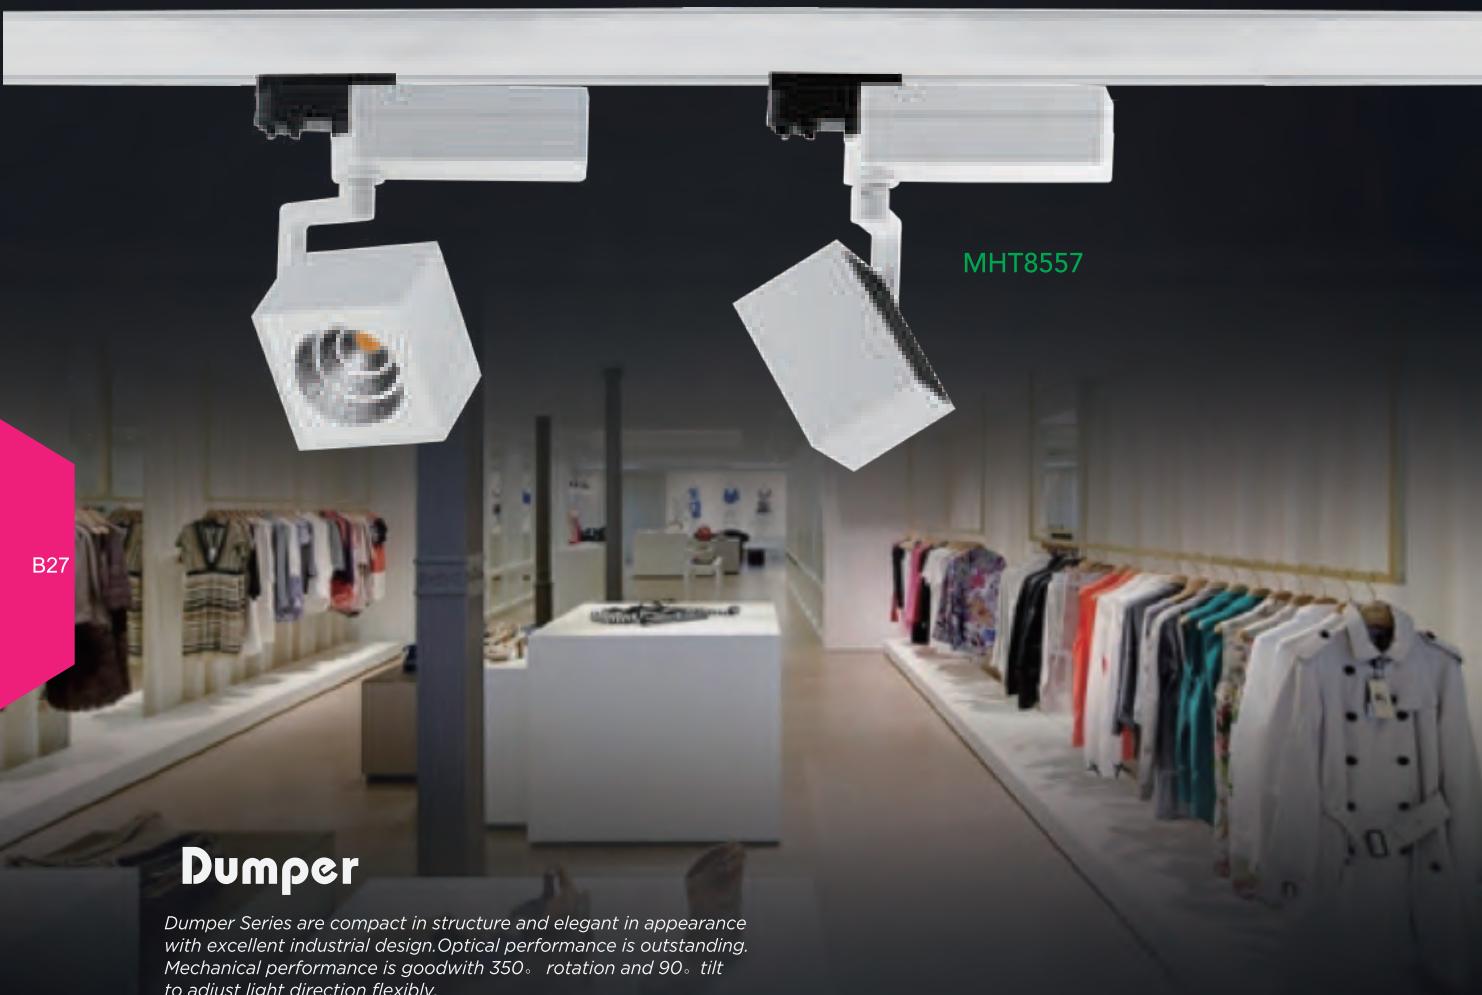

B27

Dumper

Dumper Series are compact in structure and elegant in appearance with excellent industrial design. Optical performance is outstanding. Mechanical performance is good with 350° rotation and 90° tilt to adjust light direction flexibly.


TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/screws
Wiring:	Terminal Block
Optics:	PC Metalized Reflector

LED Brand	CITIZEN
	CLL-032-1205A5-303M1A2
LED Power	12.3 W
Driver	AK-16W-60350-D6
Driver Current	350 mA
Total Power	15.4 W
Luminous Flux	1080 LM
CCT	3000K
CRI	> 80
Beam Angle	17 ° (24 ° / 60 °)

PACKING

Box size:	23 x 21.5x 9.5 cm
Carton size:	47.5 x 44.5 x 31.5 cm
Pcs per carton:	12 pcs
Each carton :	0,067 m ³

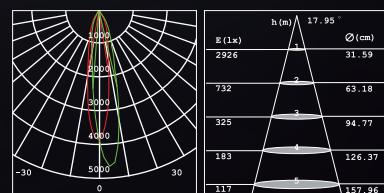

KETAI


Dumper

Tracklight



B28

TECHNICAL DATA



Input:	110-240V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	2 Wire track adaptor
Wiring:	Connect to track adaptor
Optics:	V.M. Reflector
MOQ	216 pcs

HKTA-8587



HC8587



PACKING

Box size:	17 x 15.5 x 6.5 cm
Carton size:	48.5 x 35.5 x 28 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m ³

Total Power	7 W /10 W
Driver Current	350 mA / 500 mA
Luminous Flux	450 LM / 600 LM
CCT	2700K
CRI	≥80
Beam Angle	30 °

KETAI



Tracklight



KTK1-8591



HKTA-8591

HC-8591



TECHNICAL DATA

Input:	110-240V AC 50Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	2 Wire track adaptor
Wiring:	Connect to track adaptor
Optics:	V.M. Reflector
MOQ:	216 pcs

LED Brand	Bridgelux
	BXRE-27E0800-B
LED Power	6 W
Driver	HEP LIC9W350 UNI
Driver Current	350 mA
Total Power	7 W
Luminous Flux	450 LM
CCT	2700K
CRI	≥ 80
Beam Angle	28.3 °

PACKING

Box size:	17 x 15.5 x 6.5 cm
Carton size:	48.5 x 35.5 x 28 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m ³




Tracklight

0.3m



KTK1-8592



HC-8592



HKTA-8592



TECHNICAL DATA

Input:	110-240V AC 50Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	2 Wire track adaptor
Wiring:	Connect to track adaptor
Optics:	V.M. Reflector
MOQ:	216 pcs

PACKING

Box size:	17 x 15.5 x 6.5 cm
Carton size:	48.5 x 35.5 x 28 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m ³


LED Brand	Bridgelux
LED Power	BXRE-27E0800-B
Driver	HEP LIC9W500 UNI
Driver Current	500 mA
Total Power	10 W
Luminous Flux	450 LM
CCT	2700K
CRI	> 80
Beam Angle	28.3 °



B30

KETAI

Starfish Tracklight



TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	ano. reflector
MOQ	300 pcs

PACKING

Box size:	16 x 14 x 8.5 cm
Carton size:	44 x 33.5 x 36 cm
Pcs per carton:	24 pcs
Each carton :	0,053 m ³

KTWA8551

LED Brand	Bridgelux
V8	BXRE-30E0800
LED Power	6.2 W
Driver	AK-10W-36330-D0
Total Power	7.5 W
Driver Current	350mA
Luminous Flux	606 LM
CCT	3000K
CRI	> 80
Beam Angle	33 ° (60 °)

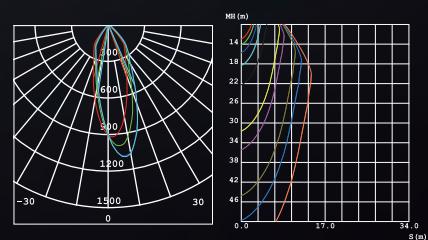

Pipe Round Tracklight



B32

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	ano. reflector
MOQ	300 pcs

KTWA8133

LED Brand	Bridgelux
	V8 BXRE-30E0800
LED Power	6.2 W
Driver	AK-10W-36330-D0
Total Power	7.5 W
Driver Current	350mA
Luminous Flux	606 LM
CCT	3000K
CRI	> 80
Beam Angle	33 ° (60 °)




PACKING

Box size:	10 x 10 x 18 cm
Carton size:	52 x 52 x 38 cm
Pcs per carton:	50 pcs
Each carton :	0,074 m ³

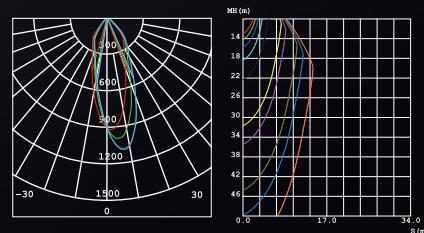

KETAI

Snail Tracklight

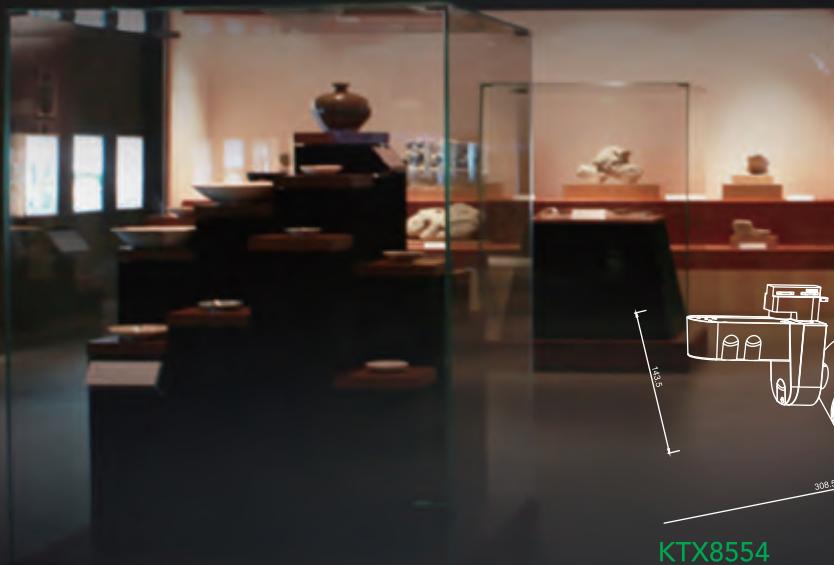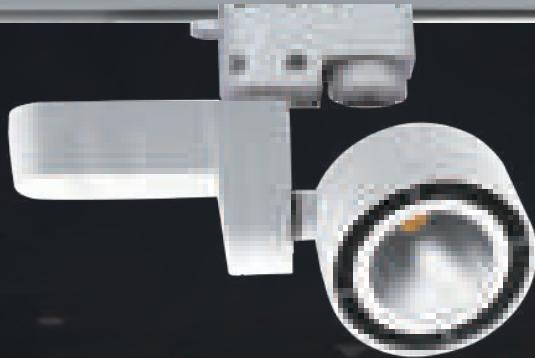

KTX8554


TECHNICAL DATA

Input:	230V AC 50Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	adaptor
Wiring:	Track adaptor
Optics:	V.M. Reflector

LED Brand	Bridgelux Vero13 BXRC-30E2000
LED Power	23 W
Driver	AK-30W-700-D6
Driver Current	700mA
Total Power	26.3 W
Luminous Flux	1772 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)

PACKING

Box size:	33 x 21.1 x 8 cm
Carton size:	44.5 x 34 x 38 cm
Pcs per carton:	8 pcs
Each carton :	0.051 m ³

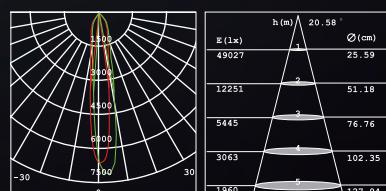

KETAI







OBEY YOUR VISION, RELISH THE MOMENT

KETAI



Ceiling Light

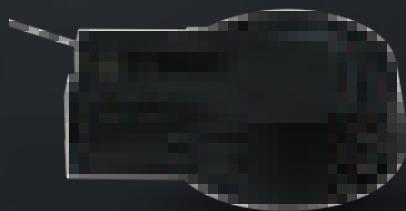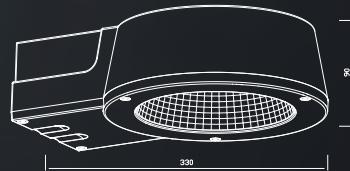

TECHNICAL DATA

Input:	220-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	216 pcs

XD2055A

LED Brand	SMD3030
LED Power	30 W
Driver	KEP30W-4310A2
Total Power	32 W
Driver Current	1000 mA
Luminous Flux	2100 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	100°

PACKING


Box size:	37 x 28 x 10.5 cm
Carton size:	57.5 x 38 x 44 cm
Pcs per carton:	8 pcs
Each carton :	0,096 m ³

KETAI

Ceiling Light



D^{0.3m} CE RoHS IP65 F

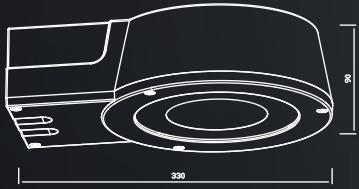

XD2055B

LED Brand	Bridgelux
LED Power	30 W
Driver	KEP30W-4310A2
Total Power	32 W
Driver Current	1000 mA
Luminous Flux	2100 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24°

TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	201 pcs

PACKING

Box size:	37 x 28 x 10.5 cm
Carton size:	57.5 x 38 x 44 cm
Pcs per carton:	8 pcs
Each carton :	0.096 m ³


C02

KETAI


Snail Ceiling Light



Snail ceiling Light Series are compact in structure and elegant in appearance with excellent industrial design. Optical performance is outstanding. Mechanical performance is good with 350° rotation and 90° tilt to adjust light direction flexibly.

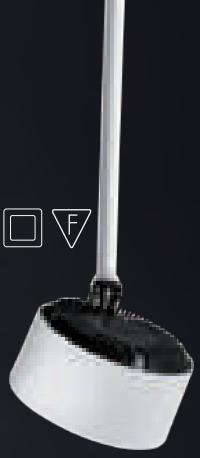

C03



XD2022-L50

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
LED Power :	23 W
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	screws
Wiring:	Terminal Block
Optics:	V.M. Reflector

LED Brand Bridgelux Vero13
BXRC-30E2000

LED Power 23 W

Driver AK-30W-700-D6

Total Power 26.3 W

Driver Current 700mA

Luminous Flux 1772 LM

CCT 3000K

CRI > 80


Beam Angle 18 ° (30 °)

Box size: 50.5x13x13cm

Carton size: 51.5x27x63cm

Pcs per carton: 8 pcs


Each carton : 0.088 m³



E (lx)	h (m)	Ø (cm)
2229	1	29.43
557	2	58.86
247	3	88.29
193	4	117.72
89	5	147.15

KETAI**Snail** Ceiling Light**XD2022A**

LED Brand	Bridgelux Vero13
	BXRC-30E2000
LED Power	23 W
Driver	AK-30W-700-D6
Total Power	26.3 W
Driver Current	700mA
Luminous Flux	1772 LM
CCT	3000K
CRI	> 80
Beam Angle	18 ° (30 °)
Box size:	17.5x15.5x16.5cm
Carton size:	48x35.5x35cm
Pcs per carton:	12 pcs
Each carton :	0.06 m ³



$E(1\pi)$	17.95	\varnothing (cm)
2926	31.59	
732	63.18	
325	94.77	
183	126.37	
117	157.96	

**XD2030 AR111**

Input:	230V AC 50Hz
Lamp	G53 QR-LP111 Max 50W



C04

KETAI

Starfish Ceiling Light

D^{0.3m} E^{10W} CE RoHS IP20

Starfish

Recessed Downlight

Starfish Series are compact in structure and elegant in appearance with excellent industrial design. Optical performance is outstanding. Mechanical performance is good with 350° rotation and 90° tilt to adjust light direction flexibly.



XD2036-1

LED Brand Bridgelux
Driver V8 BXRE-30E0800
AK-10W-36330-D5

LED Power 6.2 W

Driver Current 330mA

Total Power 7.5 W

Luminous Flux 510 LM

CCT 3000K

CRI > 80



Beam Angle 30°

Box size: 16.5x14x10.5cm

Carton size: 43.5x34.5x22.5cm

Pcs per carton: 12 pcs

Each carton : 0.034 m³



TECHNICAL DATA

Input: 110-230V AC 50/60Hz

Main Material: Aluminium +Steel

Surface Finish: White, Grey, Black powder coating

Adjustable : Gimbal


Installation by: screws

Wiring: wire



Optics: V.M. Reflector

KETAI**Starfish Ceiling Light**

0.3m RoHS IP20

**XD2036-2**

LED Brand	Bridgelux
	V8 BXRE-30E0800
Driver	AK-10W-36330-D5
LED Power	2x6.2 W
Driver Current	330mA
Total Power	2x7.5 W
Luminous Flux	1050 LM
CCT	3000K
CRI	> 80
Beam Angle	30°
Box size:	26x14x10.5cm
Carton size:	29.5x27x44cm
Pcs per carton:	8 pcs
Each carton :	0.035 m ³

**TECHNICAL DATA**


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium +Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	screws
Wiring:	wire
Optics:	V.M. Reflector

KETAI





Pipe square Ceiling Light

0.3m IP20 F



XD2019

LED Brand	Bridgelux
LED Power	V8 BXRE-30E0800
Driver	6.2 W
Total Power	AK-10W-36330-D5
Driver Current	7.5 W
Luminous Flux	350mA
CCT	606 LM
CRI	3000K
Beam Angle	> 80
Box size:	31 °
Carton size:	13 x 13 x 18.5 cm
Pcs per carton:	67 x 27.5 x 20 cm
Each carton :	10 pcs
	0.037 m ³




TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	200 pcs

KETAI



Pipe square Ceiling Light

0.3m IP20



XD2020

LED Brand	Bridgelux
	V8 BXRE-30E0800
LED Power	6.2 W
Driver	AK-10W-36330-D5
Total Power	7.5 W
Driver Current	350mA
Luminous Flux	606 LM
CCT	3000K
CRI	> 80
Beam Angle	31 °
Box size:	11.5 x 11.5 x 18.5 cm
Carton size:	59.5 x 24.5 x 20 cm
Pcs per carton:	10 pcs
Each carton :	0,029 m ³




TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	200 pcs

KETAI



Ceiling Light

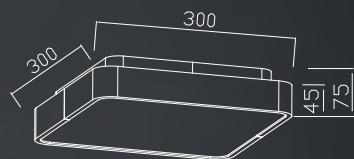

C09

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	optical diffuser panel

XD2017

LED Brand	Lumenmax SMD 3014
Driver	AK-30W-400-D6
Power	24 W
Driver Current	400mA
Luminous Flux	1300 LM
CCT	3000K
CRI	> 80
Beam Angle	107 °
Box size:	34 x 34 x 9.5 cm
Carton size:	35 x 35 x 40 cm
Pcs per carton:	4 pcs
Each carton :	0,049 m ³
MOQ	196 pcs

KETAI

Ceiling Light



C10




XD2018

LED Brand	Lumenmax SMD 3014
Driver	AK-30W-500-D6
Power	18 W
Driver Current	500mA
Luminous Flux	1222 LM
CCT	3000K
CRI	> 80
Beam Angle	101 °
Box size:	24.5 x 11 x 63 cm
Carton size:	64 x 25 x 23.5 cm
Pcs per carton:	2 pcs
Each carton :	0,038 m ³
MOQ	200 pcs

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	optical diffuser panel

KETAI**Pipe Ceiling Light**


C11

**TECHNICAL DATA**

Input:	110-230V AC 50/60Hz	LED Brand:	Nationstar
Main Material:	Aluminium	PCBAC	
Surface Finish:	White, Grey, Black powder coating	LED Power	6 W
Adjustable :	Fixed	Driver	AK-10W-36330-D5
Installation by:	Screws	Total Power	7.1 W
Wiring:	Terminal Block	Driver Current	330mA
Optics:	V.M. Reflector	Luminous Flux	455 LM
MOQ	216 pcs	CCT	3000 K
		CRI	> 80
		Beam Angle	63 °
		Box size:	10 x 10 x 10 cm
		Carton size:	31.5 x 21.5 x 42 cm
		Pcs per carton:	24 pcs
		Each carton :	0,028 m³

KETAI

Pipe Ceiling Light



XD2045

LED Brand	Nationstar
	PCBAC
LED Power	10 W
Driver	AK-10W-36330-D5
Total Power	10.9 W
Driver Current	330 mA
Luminous Flux	753.06 LM
CCT	3000 K
CRI	> 80
Beam Angle	83 °
Box size:	13 x 13 x 11 cm
Carton size:	27.5 x 27.5 x 35 cm
Pcs per carton:	12 pcs
Each carton :	0,026 m³

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	204 pcs




KETAI



Pipe Ceiling Light

0.3m IP20 F



XD2046

LED Brand	Nationstar
PCBAC	
LED Power	20 W
Driver	AK-30W-350-D6
Total Power	22.3 W
Driver Current	350 mA
Luminous Flux	1576.1 LM
CCT	3000 K
CRI	> 80
Beam Angle	63 °
Box size:	14.5 x 14.5 x 12.5 cm
Carton size:	30.5 x 30.5x 27 cm
Pcs per carton:	8 pcs
Each carton :	0,025 m³

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	204 pcs

KETAI

Pipe Ceiling Light



XD2047

LED Brand	Nationstar
	PCBAC
LED Power	40 W
Driver	KEP50W-4312A1
Total Power	44.8 W
Driver Current	1200 mA
Luminous Flux	2767.5 LM
CCT	3000 K
CRI	> 80
Beam Angle	83 °
Box size:	21x 21 x 14 cm
Carton size:	43.5 x 22 x 44 cm
Pcs per carton:	6 pcs
Each carton :	0,042 m³

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	204 pcs



KETAI**Pipe** Ceiling Light


0.3m

**TECHNICAL DATA**


Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	204 pcs

PACKING

Box size:	21 x 21 x 13 cm
Carton size:	43.5 x 43.5 x 41 cm
Pcs per carton:	12 pcs
Each carton :	0,078 m ³

**Passive cooling****XD2048**

LED Brand	LUMINUS CXM18
LED Power	37.8 W
Driver	KEP40W-4010-D18
Total Power	40 W
Driver Current	1000 mA
Luminous Flux	3226 LM
CCT	3000 K
CRI	≥ 80/90/95
Beam Angle	15° / 24°

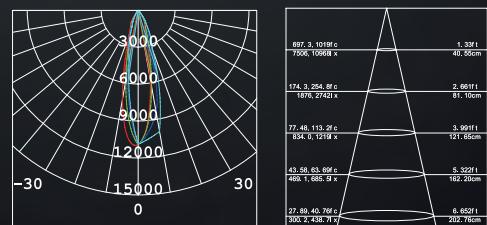

Ceiling Light



KETAI

D^{0.3m} CE RoHS



Passive cooling



XD2054

LED Brand	Bridgelux
	VERO18
LED Power	46 W
Driver	KEP50W-5315A1
Total Power	50 W
Driver Current	1500 mA
Luminous Flux	3800 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24 °

TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING

Box size:	18 x 18 x 22 cm
Carton size:	37.5 x 37.5 x 45.5 cm
Pcs per carton:	8 pcs
Each carton :	0,064 m ³



KETAI



Ceiling Light

D^{0.5m} CE RoHS



C17




TECHNICAL DATA

Input: 110-230V AC 50/60Hz
Main Material: Plastic
Surface Finish: White
Adjustable : Fixed
Installation by: W/screws
Optics: PMMA
MOQ 210 pcs

XD2049

LED Brand	Edison
	Edison 2835
LED Power	12.2 W
Driver	KEP1501-350A1
Total Power	16 W
Driver Current	350 mA
Luminous Flux	740 LM
CCT	4000K
CRI	> 80
Beam Angle	114 °

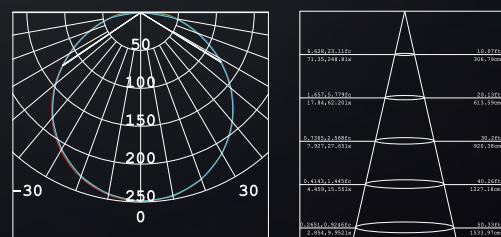

PACKING

Box size: 28 x 9.5 x 28 cm
Carton size: 57.5 x 29 x 40 cm

Pcs per carton 8 pcs
Each carton : 0.0667 m³

KETAI

Ceiling Light





Ø0.5m IP65



XD2050

LED Brand	Edison Edison 2835
LED Power	12.2 W
Driver	KEP1501-350A1
Total Power	16 W
Driver Current	350mA
Luminous Flux	860 LM
CCT	4000K
CRI	> 80
Beam Angle	118 °



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium+plastic
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	W/screws
Optics:	PMMA
MOQ	210 pcs

PACKING

Box size:	28 x 9.5 x 28 cm
Carton size:	57.5 x 29 x 40 cm
Pcs per carton	8 pcs
Each carton :	0,0667 m ³



C18

KETAI



Ceiling Light

D^{0.5m} CE RoHS IP65 F



C19



XD2068


LED Brand	Edison
	Edison 2835
LED Power	17.1 W
Driver	AK-30W-500-D6
Total Power	20 W
Driver Current	500mA
Luminous Flux	1630 LM
CCT	4000K
CRI	> 80
Beam Angle	88 °

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium+plastic
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	W/screws
Optics:	PC
MOQ	200 pcs

PACKING

Box size: 32 x 12 x 32 cm
Carton size: 65.5 x 33 x 38 cm
Pcs per carton: 6 pcs
Each carton : 0.082 m³


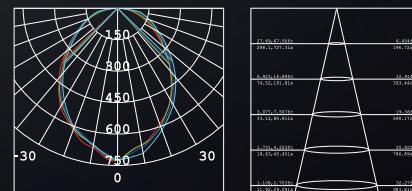


KETAI

Ceiling Light





0.5m IP65

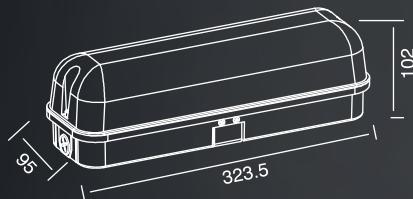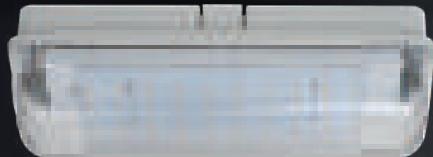

XD2053

LED Brand	Edison
	Edison 2835
LED Power	10 W
Driver	AK-10W-36330-D5
Total Power	12 W
Driver Current	330mA
Luminous Flux	1050 LM
CCT	4000K
CRI	> 80
Beam Angle	123 °



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium+plastic
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	W/screws
Optics:	PC
MOQ	200 pcs

PACKING

Box size: 11 x 11 x 34 cm

Carton size: 46 x 35 x 35 cm

Pcs per carton: 12 pcs

Each carton : 0,056 m³



C20

KETAI





Ceiling Light

Ø0.5m



XD2051

LED Brand	Edison
	Edison 2835
LED Power	17.1 W
Driver	AK-30W-500-D6
Total Power	20 W
Driver Current	500mA
Luminous Flux	1630 LM
CCT	4000K
CRI	> 80
Beam Angle	88 °



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium+plastic
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	W/screws
Optics:	PC
MOQ	200 pcs

PACKING


Box size: 32 x 12 x 32 cm
Carton size: 65.5 x 33 x 38 cm
Pcs per carton: 6 pcs
Each carton : 0.082 m³

KETAI

Ceiling Light





0.5m IP65 F

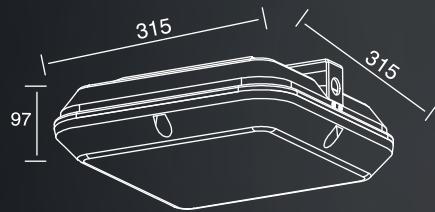

XD2052

LED Brand	Edison
	Edison 2835
LED Power	17.3 W
Driver	AK-30W-500-D6
Total Power	20 W
Driver Current	500mA
Luminous Flux	1670 LM
CCT	4000K
CRI	> 80
Beam Angle	87 °



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium+plastic
Surface Finish:	White,Grey,Black powder coating
Adjustable :	Fixed
Installation by:	W/screws
Optics:	PC
MOQ	200 pcs

PACKING

Box size:	33 x 11 x 33 cm
Carton size:	67.5 x 34 x 35 cm
Pcs per carton:	6 pcs
Each carton :	0,08 m ³



KETAI



Ceiling Light

Ø0.5m




TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium+plastic
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	W/screws
Optics:	PC
MOQ	200 pcs



PACKING

Box size:	33 x 11 x 33 cm
Carton size:	67.5 x 34 x 35 cm
Pcs per carton:	6 pcs
Each carton :	0,08 m ³

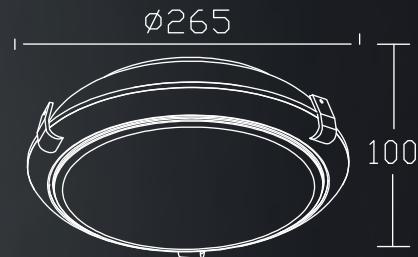

XD2069

LED Brand	Edison
	Edison 2835
LED Power	17.3 W
Driver	AK-30W-500-D6
Total Power	20 W
Driver Current	500mA
Luminous Flux	1670 LM
CCT	4000K
CRI	> 80
Beam Angle	87 °




KETAI

Ceiling Light



D^{0.5m} CE RoHS


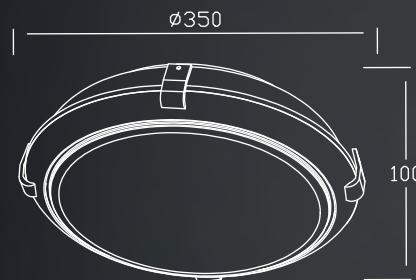


XD2070

LED Brand	Edison Edison 2835
LED Power	17.1 W
Driver	AK-30W-500-D6
Total Power	20 W
Driver Current	500mA
Luminous Flux	1630 LM
CCT	4000K
CRI	> 80
Beam Angle	88 °

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium+plastic
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	W/screws
Optics:	PC
MOQ	200 pcs



PACKING

Box size: 32 x 12 x 32 cm
 Carton size: 65.5 x 33 x 38 cm
 Pcs per carton: 6 pcs
 Each carton : 0.082 m³

KETAI



Ceiling Light

D^{0.3m} CE RoHS



TECHNICAL DATA

Input:	100-240V AC 50 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	Optical diffuser panel
MOQ	204 pcs

XD2059

LED Brand	NATIONSTAR
3528 SMD 13C20B	
LED Power	21 W
Driver	AK-30W-500-D6
Total Power	22W
Driver Current	500 mA
Luminous Flux	1553.4 LM
CCT	6000 K
CRI	> 80
Beam Angle	110°

PACKING


Box size:	41.5 x 41.5 x 5 cm
Carton size:	43 x 43 x 33 cm
Pcs per carton:	6 pcs
Each carton :	0,061 m ³

KETAI

Ceiling Light



D^{0.3m} CE RoHS



XD2060

LED Brand	NATIONSTAR 3528 SMD 14C24B
LED Power	30.8 W
Driver	AED36-700ILS
Total Power	33.8 W
Driver Current	700 mA
Luminous Flux	2287.61 LM
CCT	6000 K
CRI	≥ 80
Beam Angle	110°

TECHNICAL DATA

Input:	100-240V AC 50 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	Optical diffuser panel
MOQ	204 pcs

PACKING

Box size:	51.5 x 51.5 x 5 cm
Carton size:	53 x 53 x 22 cm
Pcs per carton:	4 pcs
Each carton :	0,062 m ³




C26

KETAI



Ceiling Light

D^{0.3m} CE RoHS

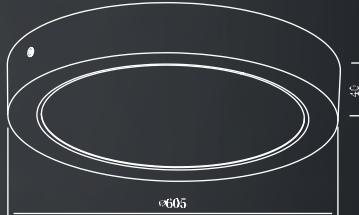

XD2061

TECHNICAL DATA

Input:	220-240V AC 50 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	Optical diffuser panel
MOQ	100 pcs


LED Brand	NATIONSTAR 3528 SMD 16C25B
LED Power	35.7 W
Driver	LCI 60W 700mA TEC Ip
Total Power	40 W
Driver Current	700 mA
Luminous Flux	3248.61 LM
CCT	6000 K
CRI	≥ 80
Beam Angle	110°

PACKING

Box size:	61.5 x 61.5 x 5 cm
Carton size:	63 x 63 x 11.5 cm
Pcs per carton:	2 pcs
Each carton :	0,045 m ³

KETAI

Ceiling Light

D^{0.3m} CE RoHS 350 IP65 F

XD2034

LED Brand	SUNFOR LSE01-601-830 -230 AC LED
Total Power	8 W
Luminous Flux	602 LM
CCT	3000K
CRI	≥80
Beam Angle	50 °

TECHNICAL DATA

Input:	220-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White/Grey/Black powder coating
Adjustable :	Titable
Installation by:	screws
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	216 pcs

PACKING

Box size:	14.5 x 12.5 x 8.5 cm
Carton size:	39 x 30.5 x 36 cm
Pcs per carton:	24 pcs
Each carton :	0,042 m ³




KETAI



Ceiling Light

0.3m IP20 F



XD2065



TECHNICAL DATA

Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey powder coating	
Adjustable direction:	Tilttable	
Installation Accessories:	Single Acticon Spring	
MOQ:	300 pcs	


PACKING

Box size: 21 x 21 x 13 cm
Carton size: 43.5 x 43.5 x 41 cm
Pcs per carton: 12 pcs
Each carton : 0,078 m³

KETAI

Ceiling Light

Ø0.3m IP20 CE RoHS



XD2066



TECHNICAL DATA

Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51	GU10 QPAR51
	Max 50W	Max 50W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey powder coating	
Adjustable direction:	Tilttable	
Installation Accessories:	Single Acticon Spring	
MOQ:	300 pcs	

PACKING

Box size:	21 x 21 x 13 cm
Carton size:	43.5 x 43.5 x 41 cm
Pcs per carton:	12 pcs
Each carton :	0,078 m ³



Ceiling Light

D_{0.3m} CE RoHS IP20 F



XD2035



TECHNICAL DATA

Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51	GU10 QPAR51
	Max 50W	Max 50W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey powder coating	
Adjustable direction:	Tilttable	
Installation Accessories:	Single Acticon Spring	
MOQ:	300 pcs	

PACKING

Box size: 21 x 21 x 13 cm
 Carton size: 43.5 x 43.5 x 41 cm
 Pcs per carton: 12 pcs
 Each carton : 0,078 m³





WE CAN GIVE YOU THE ENJOYMENT OF ROMANTIC


KETAI



D01

Venus Pendant Light

CE RoHS IP20

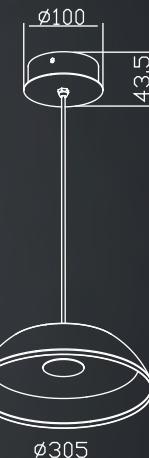

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black, Green
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ	500 pcs

PACKING

Box size:	31 x 31 x 9 cm
Carton size:	32.5 x 33.5 x 39 cm
Pcs per carton:	4 pcs
Each carton :	0,098 m ³

KF1016

LED Brand	Nichia 3030
LED Power	21W
Driver	
Total Power	25.5W
Driver Current	350mA
Luminous Flux	1465 LM
CCT	3000K
CRI	> 80
Beam Angle	133°




KETAI

Flat Pendant Light

CE RoHS IP20 F



KF1015

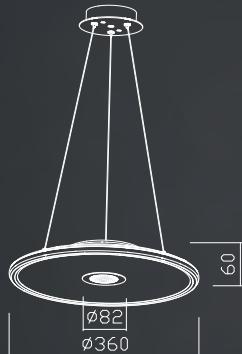

KF1015

LED Brand	Everlight + Bridgelux SMD 3528 BXRA-30E1200
Driver	AK-30W-350-D6+ KEP0902-500-D6
LED Power	19+14.5W
Total Power	39W
Driver Current	350mA+500mA
Luminous Flux	2000 LM
CCT	3000K
CRI	> 80
Beam Angle	112°

KF1015A

Everlight SMD 3528
AK-30W-350-D6
19W
22W
350mA
1300 LM
3000K
> 80
112°



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	optical diffuser panel
MOQ	200 pcs

PACKING

Box size:	41 x 15.5 x 41 cm
Carton size:	64 x 42 x 42.5 cm
Pcs per carton:	4 pcs
Each carton :	0,11 m ³

KETAI

Pendant Light



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	1.0mm diffuser
MOQ	100 pcs

KF1013

LED Brand	Everlight
	576 Pcs SMD 3528
Driver	AK-30W-500-D6
Power	36 W
Driver Current	500mA
Luminous Flux	2300 LM
CCT	3000K
CRI	> 80
Beam Angle	112°
	2500 LM
	4000K
	> 80
	112°

PACKING

Box size:	120.5 x 10.8 x 7.4 cm
Carton size:	122 x 46.5 x 17.5 cm
Pcs per carton:	8 pcs
Each carton :	0.01 m ³

Pendant Light

CE RoHS



KF1012A

LED Brand	Everlight 288 Pcs SMD 3528
Driver	W1118-A450
Power	18 W
Driver Current	500mA
Luminous Flux	1200 LM 1300 LM
CCT	3000K 4000K
CRI	> 80 > 80
Beam Angle	112° 112°



KF1012B

LED Brand	Everlight 432 Pcs SMD 3528
Driver	W1127-A700
Power	27 W
Driver Current	700mA
Luminous Flux	1700 LM 1800 LM
CCT	3000K 4000K
CRI	> 80 > 80
Beam Angle	112° 112°



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	1.0mm diffuser
MOQ	100 pcs

PACKING

Box size:	120.5 x 5.5 x 6 cm	170.5 x 5.5 x 6 cm
Carton size:	122 x 24 x 20 cm	177 x 24 x 20 cm
Pcs per carton:	12 pcs	12 pcs
Each carton :	0,059 m ³	0,085 m ³

KETAI



Flat Pendant Light



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	2.0mm diffuser
MOQ	50 pcs

PACKING

Box size:	60.5 x 30.5 x 6 cm
Carton size:	62 x 32 x 27 cm
Pcs per carton:	4 pcs
Each carton :	0.054 m ³

KF1006


LED Brand	Everlight SMD 3528
Driver	KEP1801-350A1
Power	18 W
Driver Current	350mA
Luminous Flux	1200 LM
CCT	3000K
CRI	> 80
Beam Angle	112°
	1300 LM
	4000K
	> 80
	112°

Flat Pendant Light



KF1007

LED Brand	Everlight SMD 3528
Driver	KEP36W-5307A1
Power	36 W
Driver Current	700mA
Luminous Flux	2300 LM
CCT	3000K
CRI	> 80
Beam Angle	112°
	2500 LM
	4000K
	> 80
	112°

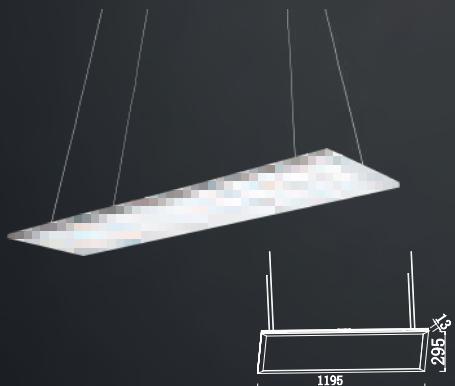

KF1008

LED Brand	Everlight SMD 3528
Driver	KEP36W-5307A1
Power	36 W
Driver Current	700mA
Luminous Flux	2300 LM
CCT	3000K
CRI	> 80
Beam Angle	112°
	2500 LM
	4000K
	> 80
	112°

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	1.0mm diffuser
MOQ	100 pcs

PACKING

	KF1007	KF1008
Box size:	60.5 x 60.5 x 6 cm	120.5 x 30.5 x 6 cm
Carton size:	62 x 32 x 27 cm	122 x 62 x 27 cm
Pcs per carton:	4 pcs	4 pcs
Each carton :	0,104 m ³	0,105 m ³



D06

KETAI

Flat Pendant Light



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Canopy
Wiring:	Terminal Block
Optics:	2.0mm diffuser
MOQ	50 pcs

PACKING

Box size:	115.5 x 20.5 x 8 cm
Carton size:	116.5 x 32 x 23 cm
Pcs per carton:	4 pcs
Each carton :	0,086 m ³

KF1014

LED Brand	Lumenmax 400Pcs SMD 3014
LED Power	30 W
Driver	KEP40W-4310A1
Total Power	35 W
Driver Current	1000mA
Luminous Flux	2200 LM
CCT	3000K
CRI	> 80
Beam Angle	110°
	2800 LM
	4000K
	> 80
	110°



KETAI

Pipe Pendant Light


CE RoHS  IP20  F 



SL356

SL357

LED Brand	Bridgelux V8 BXRE-30E0800
Driver	AK-10W-36330-D5
Power	7.5 W
Driver Current	350mA
Luminous Flux	560 LM
CCT	3000K
CRI	> 80
Beam Angle	33 ° (60 °)

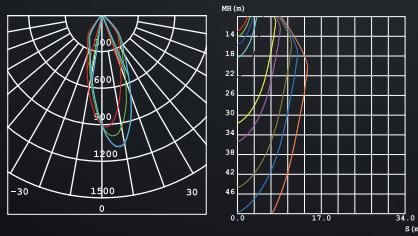

D08

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	200 pcs

PACKING

Box size:	42.5 x 14 x 10.5cm
Carton size:	54.5x 43.5 x 30 cm
Pcs per carton:	10 pcs
Each carton :	0,071 m³

KETAI




Pendant Light

CE RoHS IP20



SL360

LED Brand	Bridgelux Vero 29
Driver	HBG-160-48A
Power	120 W
Driver Current	1200mA
Luminous Flux	6000 LM
CCT	3000K
CRI	> 80
Beam Angle	21°

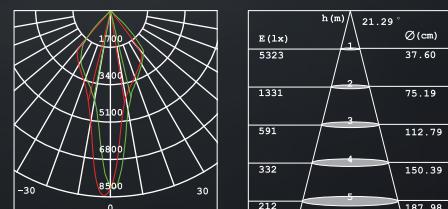

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	Aluminum Reflector
MOQ	200 pcs

PACKING



Carton size:	48x 48 x 62 cm
Pcs per carton:	1 pcs
Each carton :	0,14 m ³

Pendant Light



CE RoHS IP20 F



SL358



SL359



LED Brand	Bridgelux Vero 29
Driver	HGB-100-48A
Power	86 W
Driver Current	1000mA
Luminous Flux	4800 LM
CCT	3000K
CRI	> 80
Beam Angle	80°

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black, Green
Adjustable :	Fixed
Installation by:	canopy
Wiring:	Terminal Block
Optics:	V.M. Reflector
MOQ	500 pcs

PACKING

Carton size:	45x 45 x 37 cm
Pcs per carton:	1 pcs
Each carton :	0,075 m³



KETAI



Flat Pendant Light

CE RoHS IP20



KF1019


LED Brand	SMD2835
LED Power	18 W
Driver	AK30W-350-D6
Total Power	20 W
Driver Current	350 mA
Luminous Flux	1400 LM
CCT	4000 K
CRI	≥ 80
Beam Angle	100°

TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ:	100 pcs

PACKING

Carton size:	41x 41 x 11 cm
Pcs per carton:	1 pcs
Each carton :	0,018 m ³

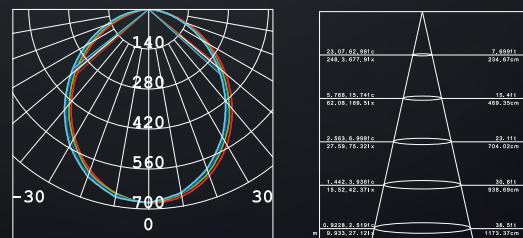

KETAI

Flat Pendant Light

CE RoHS  IP20  F 



KF1020

LED Brand	SMD2835
LED Power	28 W
Driver	AK30W-700-D6
Total Power	30 W
Driver Current	700 mA
Luminous Flux	2100 LM
CCT	4000 K
CRI	≥ 80
Beam Angle	100°

TECHNICAL DATA

Input:	220-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ	100 pcs

PACKING

Carton size:	56 x 56 x 11 cm
Pcs per carton:	1 pcs
Each carton :	0,034 m ³

KETAI



D13

Flat Pendant Light

CE RoHS IP20 F



TECHNICAL DATA

Input:	220-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ	100 pcs

PACKING

Carton size:	81 x 81 x 11 cm
Pcs per carton:	24 pcs
Each carton :	0,072 m ³

KF1021

LED Brand	SMD2835
LED Power	48 W
Driver	KEP50W-5310A1
Total Power	50 W
Driver Current	1000 mA
Luminous Flux	3500 LM
CCT	4000 K
CRI	≥ 80
Beam Angle	100°

KETAI

Flat Pendant Light

CE RoHS  IP20  F 



KF1022

LED Brand	SMD2835
LED Power	96 W
Driver	KEP50W-5310A1
Total Power	100 W
Driver Current	1000 mA
Luminous Flux	7000 LM
CCT	4000 K
CRI	≥ 80
Beam Angle	100°

TECHNICAL DATA

Input:	220-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ	100 pcs

PACKING

Carton size:	106 x 106 x 11 cm
Pcs per carton:	1 pcs
Each carton :	0,123 m ³



KETAI

Pendant Light

CE RoHS IP20



D15



TECHNICAL DATA

Input:	120-277 V AC
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Wiring:	Terminal Block
Optics:	PC Metalized Reflector
MOQ	100 pcs

PACKING

Carton size: 41 x 41 x 11 cm

Pcs per carton: 1 pcs

Each carton : 0,018 m³


SL362A

LED Brand	CITIZEN
	CLU034-1205BB-303M1A2
LED Power	18 W
Driver	AK-30W-500-D6
Total Power	20 W
Driver Current	500 mA
Luminous Flux	1600 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	16° /24° /30° /38°

KETAI

Pendant Light

CE RoHS  IP20  F

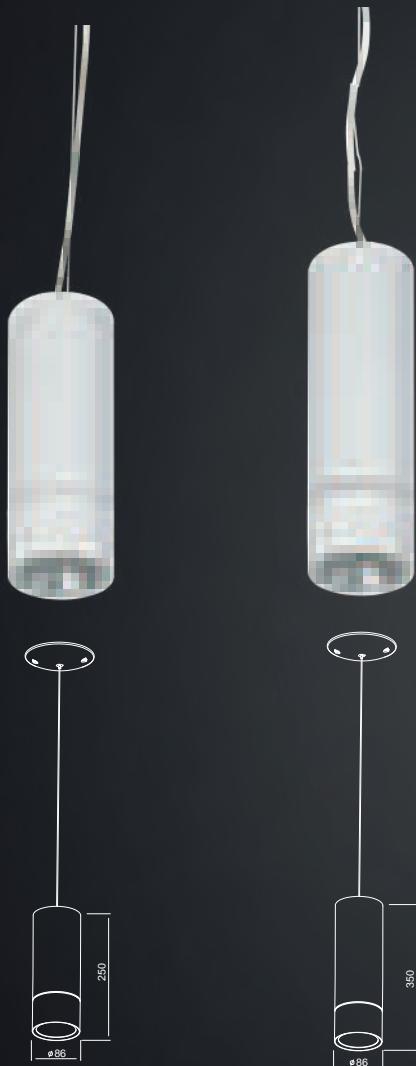

SL362B

SL362C

LED Brand	CITIZEN CLU034-1206BB-303M1A2 CLU034-1208BB-303M1A2
LED Power	25.2 W/37.8 W
Driver	AK-30W-700-D6 /KEP40W-4310A1
Total Power	28 W/42 W
Driver Current	700 mA / 1050 mA
Luminous Flux	2240 LM / 3360 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	16° /24° /30° /38°

TECHNICAL DATA


Input:	120-277 V AC
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Wiring:	Terminal Block
Optics:	PC Metallized Reflector
MOQ	100 pcs

PACKING

Carton size:	41 x 41 x 11 cm
Pcs per carton:	1 pcs
Each carton :	0,018 m ³

KETAI

Pendant Light

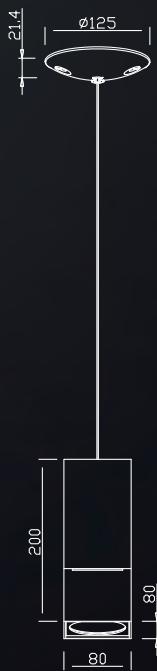

TECHNICAL DATA

Input:	120-277 V AC
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Wiring:	Terminal Block
Optics:	PC Metalized Reflector
MOQ	100 pcs

PACKING

Carton size: 41 x 41 x 11 cm
Pcs per carton: 1 pcs
Each carton : 0,018 m³

SL363A

LED Brand	CITIZEN
	CLU034-1205BB-303M1A2
LED Power	18 W
Driver	AK-30W-700-D6
Total Power	20 W
Driver Current	500 mA
Luminous Flux	1600 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	16° /24° /30° /38°

Pendant Light

CE RoHS IP20 F



ITEM	SL363C	SL363C
LED Brand	CITIZEN CLU034-1206BB-303M1A2 / CLU034-1208BB-303M1A2	
LED Power	25.2 W / 37.8 W	
Driver	AK-30W-700-D6 / KEP40W-4310A1	
Total Power	28 W / 40 W	
Driver Current	700 mA / 1050 mA	
Luminous Flux	2240 LM / 3360 LM	
CCT	3000 K	
CRI	≥ 80	
Beam Angle	16° / 24° / 30° / 38°	

TECHNICAL DATA

Input:	120-277 V AC
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Wiring:	Terminal Block
Optics:	PC Metallized Reflector
MOQ	100 pcs

PACKING

Carton size:	41 x 41 x 11 cm
Pcs per carton:	1 pcs
Each carton :	0,018 m ³

KETAI



D19

Flat Pendant Light

CE RoHS IP20 F

TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
Optics:	Optical diffuser panel
MOQ	204 pcs

PACKING

Box size:	31.5 x 31.5 x 15 cm
Carton size:	64.5 x 64.5 x 48 cm
Pcs per carton:	12 pcs
Each carton :	0.1997 m ³

KF1018

LED Brand	Nichia 3030
LED Power	12.3 W
Driver	KEP-LD18W-D1
Total Power	16 W
Driver Current	330 mA
Luminous Flux	800 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	100°

KETAI




Wall Light **KETAI**



LET WE MAKE YOUR NIGHT MYSTERIOUS CHARM


KETAI

E01

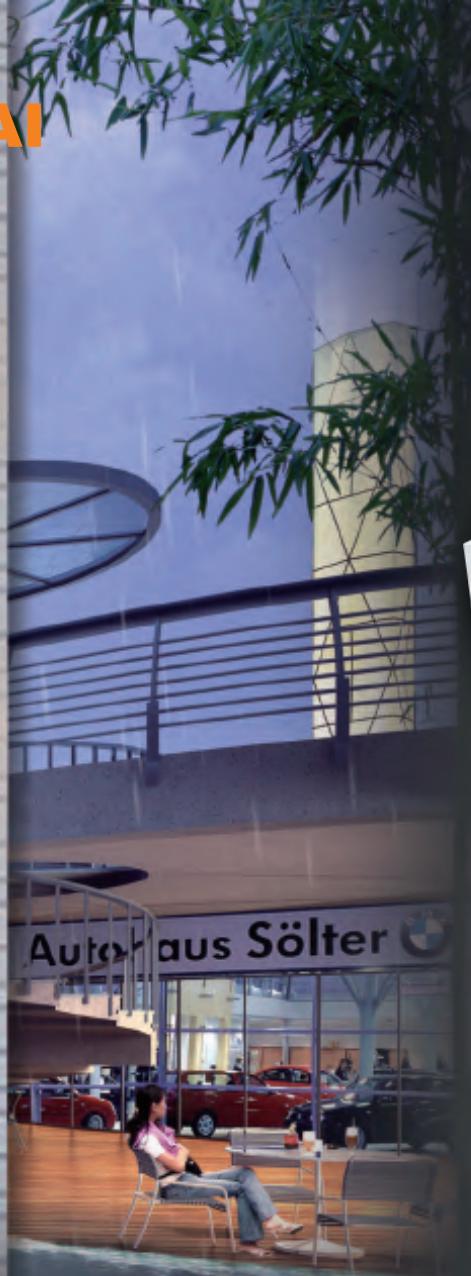

Wall light

D^{0.3m} CE RoHS




WL391A

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
MOQ	200 pcs

PACKING


Box size:	10.5 x 10.5 x 8.5 cm
Carton size:	54.5 x 22.5 x 28.5 cm
Pcs per carton:	30 pcs
Each carton :	0.035 m ³

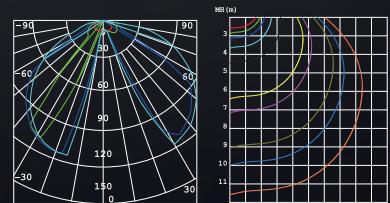

KETAI


Wall Light

D^{0.3m} CE RoHS

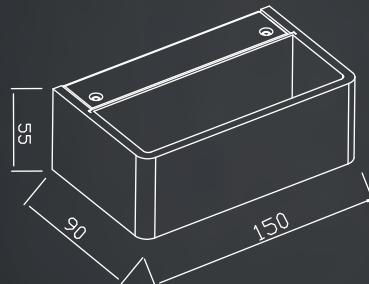

WL392A

LED Brand	Cree XP-E
Driver	KEP0901-350A1
Power	11 W
Driver Current	350 mA
Luminous Flux	392 LM
CCT	3000K
CRI	> 80
Beam Angle	133°

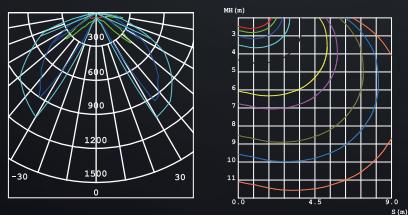

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
MOQ	200 pcs

PACKING


Box size:	17.5 x 9 x 13 cm
Carton size:	47 x 36.5 x 27.5 cm
Pcs per carton:	20 pcs
Each carton :	0.047 m ³

KETAI

E03

Wall light

D^{0.3m} CE RoHS IP20



TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
MOQ	200 pcs

PACKING

Box size:	18.5 x 11 x 11 cm
Carton size:	57 x 38.5 x 23.5 cm
Pcs per carton:	200 pcs
Each carton :	0.051 m ³

WL393A

LED Brand	Bridgelux BXRA-30E0540
Driver	AK-8W-30330-D4
Power	7.5 W
Driver Current	350 mA
Luminous Flux	255 LM
CCT	3000K
CRI	> 80
Beam Angle	150°

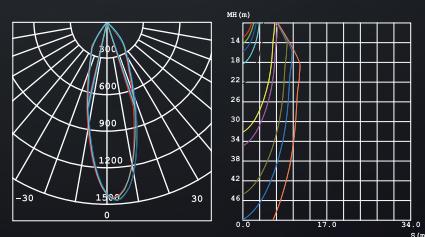

KETAI

Wall Light

0.3m



WL396A




WL396



Item	WL396	WL396A
LED Brand	Everlight SMD 3528	
LED Power	8 W	2x8 W
Driver	KEP0901 -350B1	KEP0901 -350B1
Total Power	11 W	21 W
Driver Current	350 mA	350 mA
Luminous Flux	660 LM	1305 LM
CCT	3000K	3000K
CRI	> 80	> 80
Beam Angle	113°	113°

WL396



E (lx)	b (m)	Q (cm)
275	1	112.74
68	2	300.68
31	3	601.36
17	4	902.04
11	5	1202.71
		1503.39

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics	2mm diffuser
MOQ:	200 pcs

PACKING

Box size:	8 x 5.5 x 33.5 cm
Carton size:	34.5 x 29.5 x 34 cm
Pcs per carton:	20 pcs
Each carton :	0.035 m ³


E04

KETAI

E05


Wall light

D^{0.3m} CE RoHS    IP20  



WL397A

LED Brand	Lumenmax 5630
Driver	AK-10W-36330-D5
Power	9 W
Driver Current	350 mA
Luminous Flux	300 LM
CCT	3000K
CRI	> 80
Beam Angle	64 °

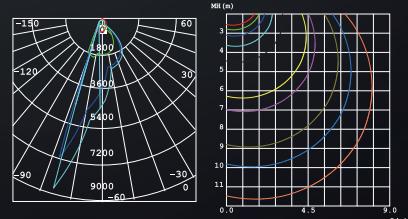

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
MOQ	200 pcs

PACKING

Box size:	14 x 6 x 5.5 cm
Carton size:	30 x 29 x 34.5 cm
Pcs per carton:	20 pcs
Each carton :	0.03 m ³

Wall Light

0.3m

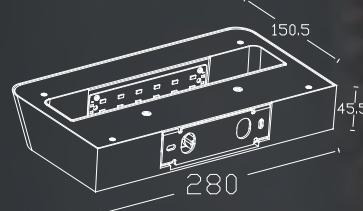

WL398A

LED Brand	Lumenmax 5630
LED Power	12x0.5W
Driver	KEP0901-350A1
Total Power	8 W
Driver Current	120 mA
Luminous Flux	300 LM
CCT	3000K
CRI	> 80
Beam Angle	129°

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
MOQ:	200 pcs

PACKING

Box size:	18 x 7.5 x 31.5 cm
Carton size:	63 x 37.5 x 33 cm
Pcs per carton:	16 pcs
Each carton :	0.078 m ³


KETAI



E07

Wall light

D^{0.3m} CE RoHS



WL536

LED Brand	HongLI HL-LB001D20W-3B3C3
LED Power	2 x 3 W
Driver	KEP0601-350A1
Total Power	8 W
Driver Current	350 mA
Luminous Flux	163 LM
CCT	3000K
CRI	> 80
Beam Angle	100 °

TECHNICAL DATA



Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Flexible Wire Striped End
MOQ	200 pcs

PACKING

Box size:	12.5 x 12.5 x 7.5 cm
Carton size:	39.5 x 39.5 x 17 cm
Pcs per carton:	18 pcs
Each carton :	0.026 m ³

Wall Light

0.3m



WL537

LED Brand	HongLI
	HL-LB001D20W-3B3C3
LED Power	2 x 3 W
Driver	KEP0601-350A1
Total Power	8 W
Driver Current	350 mA
Luminous Flux	163 LM
CCT	3000K
CRI	> 80
Beam Angle	100 °

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Flexible Wire Striped End
MOQ	200 pcs

PACKING

Box size:	12.5 x 12.5 x 7.5 cm
Carton size:	39.5 x 39.5 x 17 cm
Pcs per carton:	12 pcs
Each carton :	0.026 m ³




E08

KETAI

E09

Wall light

D^{0.3m} CE RoHS IP54



TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Flexible Wire Striped End
MOQ	200 pcs

PACKING


Box size:	11.4 x 9.5 x 15.5 cm
Carton size:	35.7 x 30 x 33.5 cm
Pcs per carton:	18 pcs
Each carton :	0,036 m ³

WL538

LED Brand	HongLI
	HL-LB001D20W-3B3C3
LED Power	2x3 W
Driver	KEP0601-350A1
Total Power	8 W
Driver Current	350 mA
Luminous Flux	163 LM
CCT	3000K
CRI	> 80
Beam Angle	100 °

Wall Light

0.3m



WL539

LED Brand	Bridgelux
	Vero10 BXRC-30E1000-B
Driver	AK30W-500-D6
Power	2x13.2 W
Driver Current	500 mA
Luminous Flux	1080 LM
CCT	3000K
CRI	> 80
Beam Angle	24°/40°/60°

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics	V.M. Reflector
MOQ	108 pcs

PACKING

Box size:	14.5 x 10 x 21 cm
Carton size:	41.5 x 30 x 43.5 cm
Pcs per carton:	16 pcs
Each carton :	0.055 m ³


KETAI

E11



Wall light

D^{0.3m} CE RoHS IP20



WL540

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Flexible Wire Striped End
MOQ	200 pcs


PACKING

Box size:	14.5x10x9.5cm
Carton size:	52x15.5x50 cm
Pcs per carton:	25 pcs
Each carton :	0.04 m ³

LED Brand	Bridgelux
LED Power	V8 BXRE-30E0800-B
Driver	6.2 W
Total Power	AK-8W-30330-D4
Driver Current	7.5 W
Luminous Flux	330 mA
CCT	330 LM
CRI	3000K
Beam Angle	> 80
	100 °

KETAI

Wall Light

D^{0.3m} CE RoHS    

WL541

LED Brand	Bridgelux
	V8 BXRE-30E0800-B
LED Power	6.2 W
Driver	AK-8W-30330-D4
Total Power	7.5 W
Driver Current	330 mA
Luminous Flux	330 LM
CCT	3000K
CRI	> 80
Beam Angle	100 °

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Flexible Wire Striped End
MOQ	200 pcs

PACKING


Box size:	16.5x10x9.5 cm
Carton size:	52x17.5x50 cm
Pcs per carton:	25 pcs
Each carton :	0.045 m ³

KETAI

E13

Wall light

D^{0.3m} CE RoHS



WL542

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Flexible Wire Striped End
MOQ	200 pcs


LED Brand	Bridgelux
LED Power	V8 BXRE-30E0800-B 6.2 W
Driver	AK-8W-30330-D4
Total Power	7.5 W
Driver Current	330 mA
Luminous Flux	330 LM
CCT	3000K
CRI	> 80
Beam Angle	100 °

PACKING

Box size:	16.5x10x9.5 cm
Carton size:	52x17.5x50 cm
Pcs per carton:	25 pcs
Each carton :	0.045 m ³

KETAI

Wall Light

0.3m **C E RoHS**

WL543

LED Brand	Bridgelux
LED Power	V8 BXRE-30E0800-B
Driver	6.2 W
Total Power	AK-8W-30330-D4
Driver Current	7.5 W
Luminous Flux	330 mA
CCT	330 LM
CRI	3000K
Beam Angle	> 80
	100 °

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Flexible Wire Striped End
MOQ	200 pcs


PACKING

Box size:	16.5x10x9.5 cm
Carton size:	52x17.5x50 cm
Pcs per carton:	25 pcs
Each carton :	0.045 m ³

KETAI

Wall light

0.3m

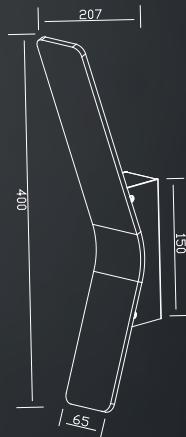

TECHNICAL DATA

Input:	220-240 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
MOQ	218 pcs


PACKING

Box size:	41 x 21.5 x 7.5 cm
Carton size:	44.5 x 42 x 32 cm
Pcs per carton:	24 pcs
Each carton :	0,059 m ³

WL544

LED Brand	Bridgelux V8
LED Power	6.2 x 2 W
Driver	AK-16W-60330-D6
Total Power	15 W
Driver Current	330 mA
Luminous Flux	800 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	15° / 24°

Wall Light



D16

WL546

LED Brand	Bridgelux
	V 8
LED Power	6.2 W
Driver	AK-10W-36330-D5
Total Power	7 W
Driver Current	330 mA
Luminous Flux	560 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24°

TECHNICAL DATA


Input:	110-240V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
MOQ	204 pcs

PACKING

Box size:	17x 17 x 6 cm
Carton size:	18.5 x 53 x 27 cm
Pcs per carton:	12 pcs
Each carton :	0.026 m ³

Wall lightA photograph showing a modern office interior with a dark ceiling featuring a grid pattern. In the foreground, a white rectangular wall-mounted light fixture is mounted on a dark wall. In the background, there are several desks with computer monitors and filing cabinets along a long wooden counter.

D^{0.3m} CE RoHS IP20

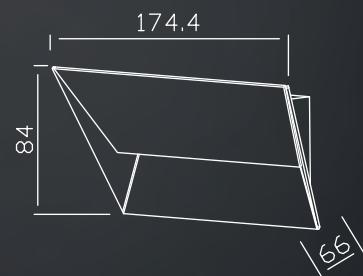**TECHNICAL DATA**

Input:	110-240V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
MOQ	200 pcs

PACKING


Box size:	18 x 9 x 7.5 cm
Carton size:	37.5 x 19.5 x 40 cm
Pcs per carton:	20 pcs
Each carton :	0.03 m ³

WL547

LED Brand	CREE CREE1304
LED Power	4 W
Driver	KEP0601-400A1
Total Power	4.5 W
Driver Current	400 mA
Luminous Flux	560 LM
CCT	3000 K
CRI	> 88.4
Beam Angle	24°

Wall Light

0.3m



E18

WL391E

LED Brand	CREE CREE1304
LED Power	4 W
Driver	KEP0601-400A1
Total Power	4.5 W
Driver Current	400 mA
Luminous Flux	88.4 LM
CCT	3000 K
CRI	> 80
Beam Angle	100°

TECHNICAL DATA

Input:	110-240V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
MOQ	216 pcs

PACKING


Box size:	10.5 x 10.5 x 12 cm
Carton size:	33.5 x 22.5 x 39 cm
Pcs per carton:	18 pcs
Each carton :	0.029 m ³

KETAI



Wall light

D^{0.3m} CE RoHS IP65



WL545B

TECHNICAL DATA

Input:	100-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	Screws
Wiring:	Terminal Block
Optics:	V.M.Reflector
MOQ	200 pcs


LED Brand	Bridgelux VERO18
LED Power	30 W
Driver	KEP30W-4310A2
Total Power	32 W
Driver Current	1000 mA
Luminous Flux	2100 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24°

PACKING

Box size:	37 x 28 x 10.5 cm
Carton size:	57.5 x 38 x 44 cm
Pcs per carton:	8 pcs
Each carton :	0,096 m ³

KETAI

Wall Light

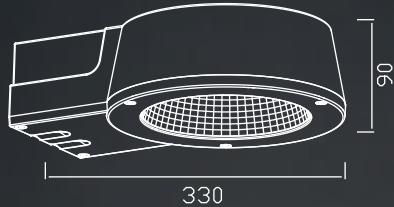D^{0.3m} CE RoHS     

E20

WL545A

LED Brand	Nichia SMD3030
LED Power	30 W
Driver	KEP30W-4310A2
Total Power	32 W
Driver Current	1000 mA
Luminous Flux	2100 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	100°

TECHNICAL DATA


Input:	100-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Fixed
Installation by:	screws
Wiring:	Terminal Block
Optics:	V.M.Reflector optical diffuser panel
MOQ	200 pcs

PACKING

Box size:	37 x 28 x 10.5 cm
Carton size:	57.5 x 38 x 44 cm
Pcs per carton:	8 pcs
Each carton :	0,096 m ³

KETAI

Wall light



TECHNICAL DATA

Input:	100-240V AC 50Hz
Main Material:	Aluminium
Surface Finish:	White, Black, Grey powder coating
Adjustable :	Fixed
Installation by:	W/Screws to fix on surface
Wiring:	Terminal Block
MOQ	300 pcs


WL548

LED Brand	Edison3535
LED Power	6 W
Driver	KEP-0402-500B1
Total Power	9 W
Luminous Flux	370 LM
CCT	3000 K
CRI	> 80
Beam Angle	92°

PACKING

Box size:	23.3 x 13.0 x 4.8 cm
Carton size:	24.8 x 42 x 22 cm
Pcs per carton:	12 pcs
Each carton :	0,069 m ³

Wall light



E22

TECHNICAL DATA

Input:	230V AC 50Hz
Main Material:	Aluminium
Surface Finish:	White, Black, Grey powder coating
Adjustable :	Fixed
Installation by:	W/Screws to fix on surface
Wiring:	Terminal Block
MOQ	300 pcs

WL552

LED Brand	Bridgelux
VER08	
LED Power	6.2 W
Driver	HEP-LIC9W350NUI / 100 ~ 240v
Total Power	7 W
Luminous Flux	365 LM
CCT	3000 K
CRI	> 80
Beam Angle	92°

PACKING

Box size:	23.3 x 13.0 x 4.8 cm
Carton size:	24.8 x 42 x 22 cm
Pcs per carton:	12 pcs
Each carton :	0,069 m ³



Garden Light


KETAI

CREATE A WONDERFUL LIFE

KETAI Garden Light

TECHNICAL DATA


Input:	110-230V AC 50/60Hz
Main Material:	S. Steel
Surface Finish:	S. Steel
Adjustable :	Fixed
Installation by:	Leaf Cilp
Wiring:	3mm Cable
Optics:	4mm Glass




KT506H-3W



LED Brand	Everlight 3W
Driver	KEP0103-AS
Power	3 W
Driver Current	350 mA
Luminous Flux	70 LM
CCT	3000K
CRI	> 70
Beam Angle	18°
Box size:	9 x 7 x 16.5 cm
Carton size:	30 x 29 x 35 cm
Pcs per carton:	24 pcs
Each carton :	0,03 m ³
MOQ:	120 pcs

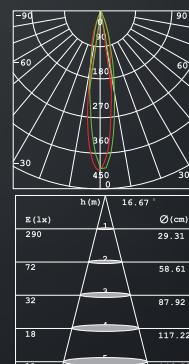

G03

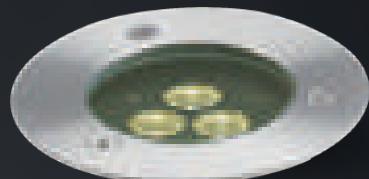

TECHNICAL DATA

Input:	230V AC 50/60Hz
Main Material:	S. Steel
Surface Finish:	S. Steel
Adjustable :	Fixed
Installation by:	Leaf Clip
Wiring:	1.5 Cable
Optics:	PMMA lens+glass




KT510H-9W



LED Brand	Everlight	3x3W
Driver	KEP0303-700B1	
Power	9 W	
Driver Current	700 mA	
Luminous Flux	195 LM	
CCT	3000K	
CRI	> 80	
Beam Angle	18°	
Box size:	13 x 12 x 13 cm	
Carton size:	37 x 37 x 27.5 cm	
Pcs per carton:	18 pcs	
Each carton:	0,037 m ³	
MOQ:	120 pcs	

spec

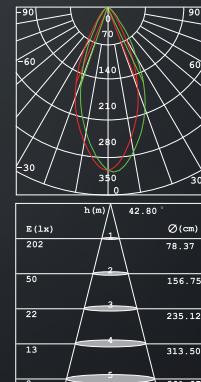

G04

KETAI

Garden Light

CE RoHS IP65



G01

TECHNICAL DATA

Input:	230V AC 50/60Hz
Main Material:	s. steel
Surface Finish:	WH BK GN
Adjustable :	Fixed
Installation by:	Sleeve
Wiring:	1.5m Cable
Optics	8mm Glass
MOQ	100 pcs
Box size:	17 x 17 x 14 cm
Carton size:	35.5 x 18 x 44 cm
Pcs per carton:	6 pcs
Each carton :	0,028 m ³



KT521-6W KT521-9W

LED Brand	Nichia 3030	
LED Power	6W	9W
Driver	KEP1001-350B1	KEP0902-500B1
Total Power	8W	12W
Driver Current	350 mA	500 mA
Luminous Flux	333 LM	365 LM
CCT	6000K	6000K
CRI	> 70	> 70
Beam Angle	49°	48°



Garden Light

CE RoHS   IP65  




TECHNICAL DATA

Input	110~230V AC 50/60Hz
Main Material	GN
Surface Finish	s. steel
Adjustable	Fixed
Installation by	sleeve
Wiring	screws Block
Optics	PMMA lens+glass

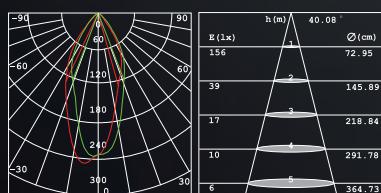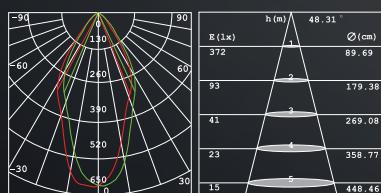

	KT543	KT545
LED Brand	Nichia 3030	
LED Power	12 W	4 W
Driver	KEP-LD1201-F	KEP0401-350A1
Power	13.6 W	4.9 W
Driver Current	350mA	350mA
Luminous Flux	600 LM	212 LM
CCT	6000K	6000K
CRI	> 70	> 70
Beam Angle	49°	40°
Box size:	17.5 x 17.5 x 13 cm	12 x 12 x 12 cm
Carton size:	36.5x 36.5x 42cm	37.5x 25.5 x 39 cm
Pcs per carton:	12 pcs	18pcs
Each carton :	0,056m ³	0,037m ³
MOQ	108 pcs	108 pcs



KETAI

Garden Light

CE RoHS



G05

TECHNICAL DATA


KT501

KT50668

Input:	110-230V AC 50/60Hz	
Main Material:	S. Steel	Brass
Surface Finish:	S. Steel	Chrome
Adjustable :	Fixed	Fixed
Installation by:	Sleeve	thread
Wiring:	2m Cable	gear box
Optics	3mm Glass	2mm PC diffuser
LED Brand	Everlight 3W	Everlight SMD3528
Driver	KEP0203-700A2	KT50668A RGB-PC CON
Power	1x3W	6x0.07W
Driver Current	700 mA	12V DC
Luminous Flux	30 LM	2.1 LM
CRI	6000K	6000K
	> 70	> 70
Beam Angle	43°	27°
Box size:	13.5 x 13.5 x 16.5 cm	18 x 16 x 13.5 cm
Carton size:	56 x 28.5 x 35.5 cm	70 x 19.5 x 34 cm
Pcs per carton:	16 pcs	16 pcs
Each carton :	0,057 m ³	0,046 m ³
MOQ	112 pcs	100 pcs

Garden Light


CE RoHS   IP65  

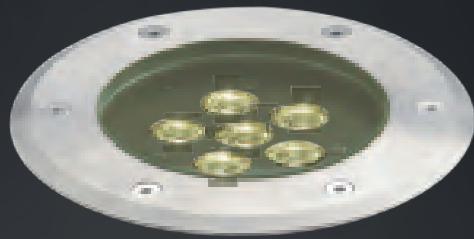

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	S. Steel
Surface Finish:	S. Steel
Adjustable :	Fixed
Installation by:	Sleeve
Wiring:	screws block
Optics	PMMA lens+glass

  IP68  

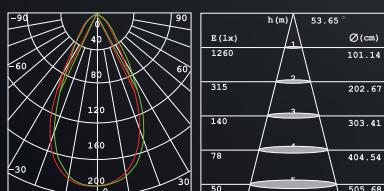

spec


KT546 / KT546 RGB

LED Brand	Everlight 1W
Driver	KEP1001-350B1 / KT546_RGB CON
Power	6W
Driver Current	350 mA
Luminous Flux	210 LM
CCT	6000K
CRI	> 80
Beam Angle	54°
Box size:	27.5 x 21.5 x 12.5 cm
Carton size:	44.5 x 28.5 x 39.5 cm
Pcs per carton:	6 pcs
Each carton :	0.05m ³
MOQ	108 pcs

G06

KETAI



Garden Light

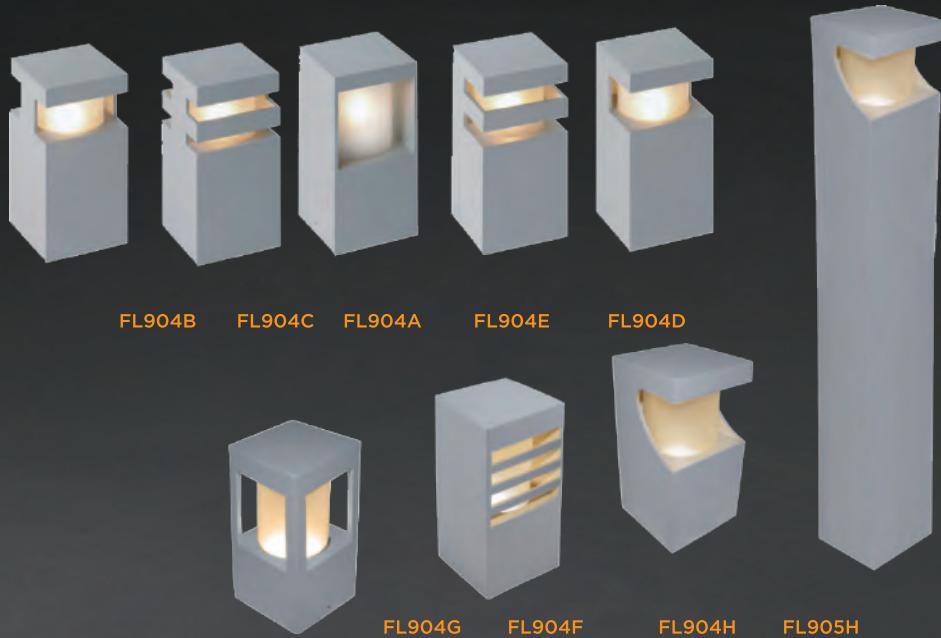

H01


TECHNICAL DATA

Input: 110-230V AC 50/60Hz
Main Material: Aluminium
Adjustable : Fixed
Installation by: Screws
Wiring: Wire
Optics Frosted glass

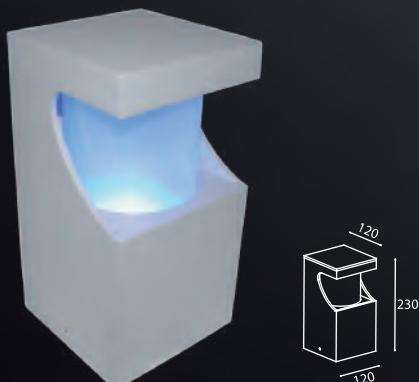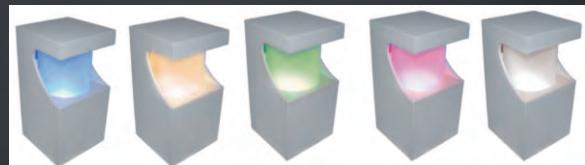

FL904H

LED Brand	Everlight 3x1W3x1W
Driver	KEP0301-350A1
Power	3W
Driver Current	350 mA
Luminous Flux	
CCT	3000K
CRI	> 80
Beam Angle	
MOQ	48 pcs
Box size:	12.5 x 12.5 x 23 cm
Carton size:	26.5 x 26.5 x 25 cm
Pcs per carton:	4 pcs
Each carton :	0,018 m ³




FL905H


LED Brand	Everlight 3x1W
Driver	KEP0301-350A1
Power	3W
Driver Current	350 mA
Luminous Flux	
CCT	3000K
CRI	> 80
Beam Angle	
MOQ	48 pcs
Box size:	13.5 x 13.5 x 81.5 cm
Carton size:	83.5 x 29 x 15.5 cm
Pcs per carton:	4 pcs
Each carton :	0,037 m ³



FL904C

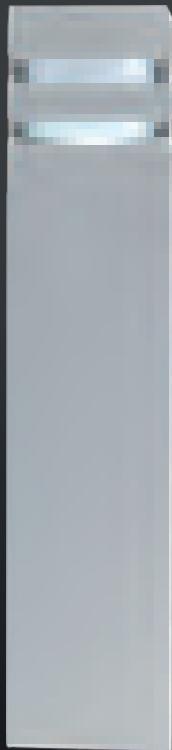

FL905C

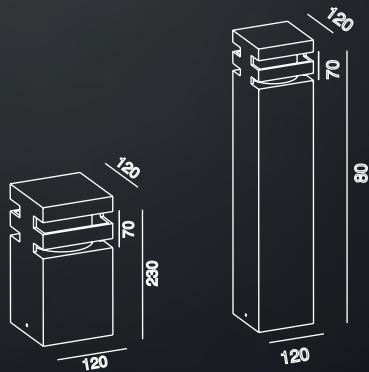


H02


KETAI

Garden Light


FL904A

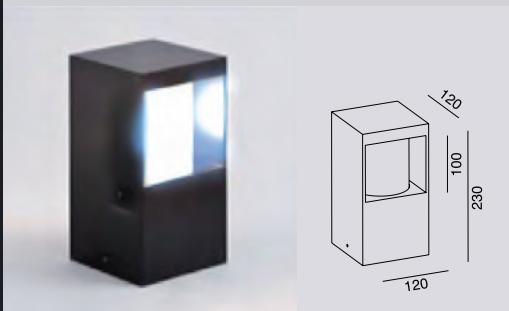


FL905A

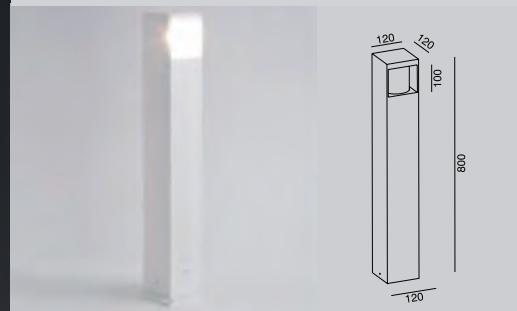


FL904B

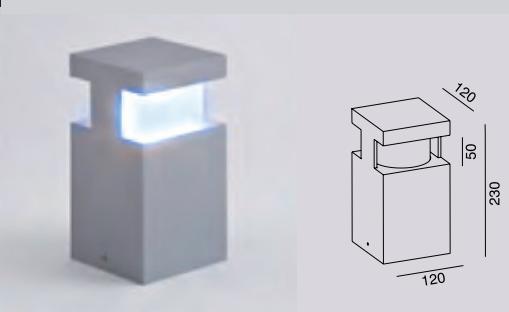


FL905B

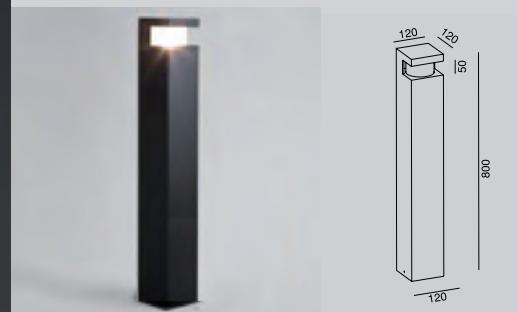


FL904D

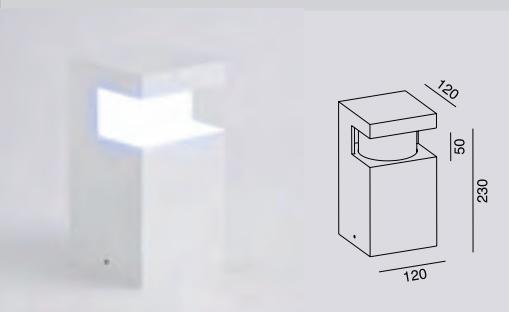


FL904E

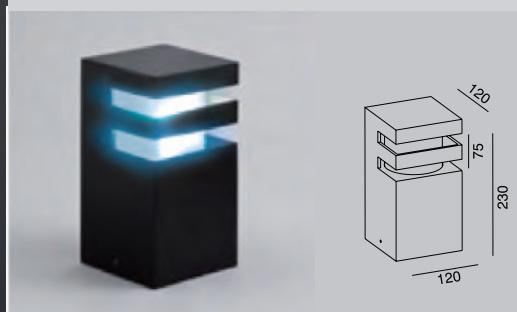

FL904B

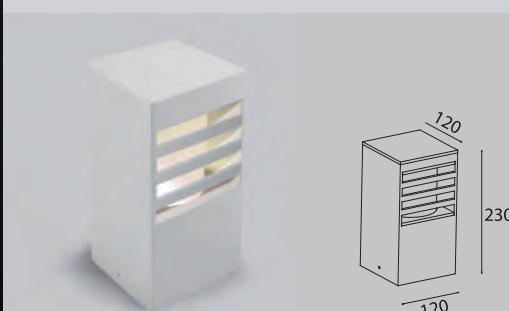

FL905B

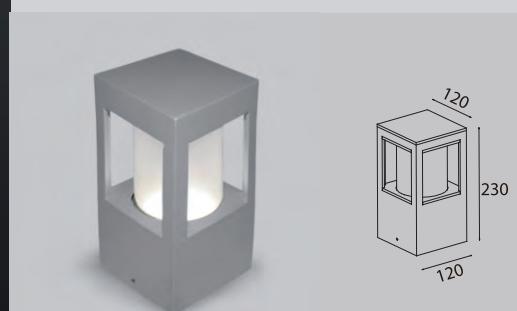

H03

Garden Light

KETAI



KETAI

Garden Light

CE RoHS      

HC8515 A / HC8515A-RGB





HC8515
HC8515-RGB

H05

TECHNICAL DATA

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	Anodized
Adjustable :	Tilttable
Installation by:	Screws
Wiring:	fast connector
Optics	PMMA lens+glass



HC8515

HC8515A

LED Brand	Nichia 3030
Driver	KEP0602-500-D6
Power	9W
Driver Current	500 mA
Luminous Flux	18W
CCT	6000K
CRI	> 80
Beam Angle	500 mA
MOQ	100 pcs
Box size:	34.5 x 11 x 15.5 cm
Carton size:	57 x 36x 17 cm
Pcs per carton:	5 pcs
Each carton :	0,034 m ³
	109 x 24 x 33.5 cm
	4 pcs
	0,088 m ³

KETAI






CREATE A WONDERFUL LIFE

KETAI

J01

Recessed D.L

MR16 / GU10



KT6394



TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Scoket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey powder coating
Adjustable direction:	Tiltable
Installation Accessories:	Single Acticon Spring
MOQ:	300 pcs



PACKING

Box size:	10 x 10 x 7.5 cm
Carton size:	52 x 21.5 x 40 cm
Pieces per carton:	50 pcs
Each carton :	0.045 m ³

Recessed D.L

MR16 / GU10



KT6395

 $\Phi 85\text{ mm}$


TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Scoket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey powder coating	
Adjustable direction:	Tilttable	
Installation Accessories:	Single Acticon Spring	
MOQ:	300 pcs	

PACKING

Box size:	10 x 10 x 7.5 cm
Carton size:	52 x 21.5 x 40 cm
Pieces per carton:	50 pcs
Each carton :	0.045 m ³



J02



3


L4

KETAI




Durm Recessed Downlight

D^{0.5m} CE RoHS IP20 F III



KT6388

Ø 70

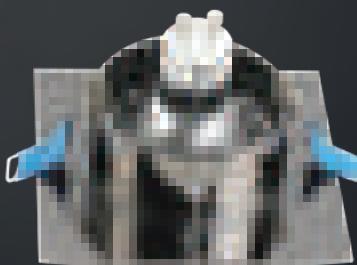

TECHNICAL DATA

Input:	110-230 V AC 50 Hz	Socket:	G5.3	GZ10
Main Material:	Aluminium + Steel	Input:	12V 50Hz	230V 50Hz
Surface Finish:	Chrome/cold/Antique/textured white/black nickel	Lamp Type :	MR16 QR-CBC-51	GU10 QPAR51
Adjustable :	Fixed		Max 50W	Max 50W
Installation by:	S.A.Spring			
Wiring:	W/wire			
Optics:	V.M.Reflector			
MOQ	200 pcs			

PACKING

Box size: 12.5 x 10.5 x 4.5 cm

Carton size: 54.5 x 26.5 x 25 cm

Pcs per carton: 50 pcs

Each carton : 0,036 m³

KETAI

Durm Recessed Downlight

0.5m



KT6389

Ø 70



J04

Socket: G5.3
Input: 12V 50Hz
Lamp Type : MR16 QR-CBC-51
Max 50W

GZ10
230V 50Hz
GU10 QPAR51
Max 50W

TECHNICAL DATA

Input:	110-230 V AC 50 Hz
Main Material:	Aluminium + Steel
Surface Finish:	Chrome/cold/Antique/textured white/black nickel
Adjustable :	Fixed
Installation by:	S.A.Spring
Wiring:	W/wire
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING

Box size: 10.5 x 10.5 x 4.5cm
Carton size: 54.5 x 22.5 x 25cm
Pcs per carton: 50 pcs
Each carton : 0,031 m³

KETAI

Recessed DownLight



D^{0.3in} CE RoHS 350° IP20 F




J05



KT6387



KT6391



TECHNICAL DATA

Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
IP rating:	IP20	
Main Material:	Gypsum	
Surface Finish:	White/Black/Grey powder coating	
Adjustable direction:	Tiltable	
Installation Accessories:	Single Acticon Spring	
MOQ:	300 pcs	



PACKING

Box size:	20 x 16 x 10 cm
Carton size:	41.5 x 33.5 x 32 cm
Pcs per carton:	212 pcs
Each carton :	0,044 m ³

KETAI

Recessed DownLight

0.3m

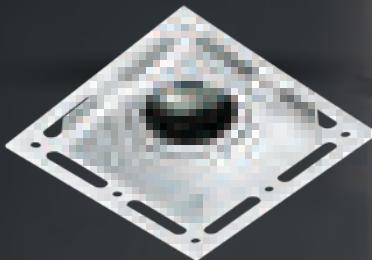

KT6392



KT6393



J06

TECHNICAL DATA

Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey powder coating	
Adjustable direction:	Tilttable	
Installation Accessories:	Single Acticon Spring	
MOQ:	300 pcs	

PACKING


Box size:	20 x 16 x 10 cm
Carton size:	41.5 x 33.5 x 32 cm
Pcs per carton:	212 pcs
Each carton :	0,044 m ³

KETAI

Recessed D.L




FT202



J07

FT202K2

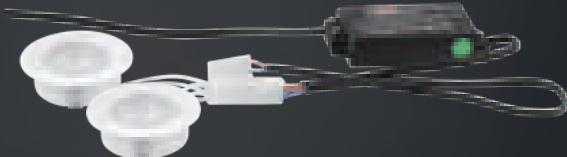


TECHNICAL DATA

Socket:	G4
Input:	12V 50Hz
cutout:	QT49 G4 Max 20W
Lamp Type :	Φ 58 mm
IP rating:	IP20
Main Material:	Steel
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Fixed
Installation Accessories:	Leaf Clip
Wiring:	G4 lampholder /15cm cable/ Flexible Wire / Striped End
Optics:	2mm tempered center-frosted glass

PACKING

Box size:	6.8 x 6.8 x 3.8 cm
Carton size:	36 x 29 x 22 cm
Pieces per carton:	100 pcs

Recessed D.L



KT6277


Φ 85 mm

J08



KT6280

Φ 110 mm



TECHNICAL DATA

Item No. :	KT6277	KT6280
Socket:	GX53	
Input:	230V AC 50Hz	
Lamp Type :	GX53 Max 11W	
IP rating:	IP20	
Main Material:	Steel	
Surface Finish:	WH, CH, GN	
Adjustable direction:	Fixed	
Installation Accessories:	Single Acticon Spring	
Wiring:	Connection Box	

PACKING

Box size:	12.5 x 11.5 x 10.5 cm	13.5 x 13.5 x 10 cm
Carton size:	59.5 x 26.5 x 55.5 cm	70 x 29.5 x 53 cm
Pieces per carton:	50 pcs	50 pcs
Each carton :	0.088 m ³	0.109 m ³

KETAI

Recessed D.L



MR16 / GU10



KT6352




Φ 78 mm

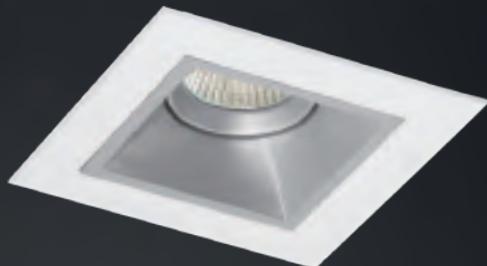

KT6351-1




105x105 mm



KT6351



78x78 mm



ACCESSORIES



L1



L2



L3



L4

TECHNICAL DATA

Lampholder :	L1 / L2
Socket:	G5.3
Input:	12V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W

L3 / L4
GZ10
230V 50Hz
GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Fixed / Tiltable
Installation Accessories:	Single Acticon Spring

PACKING


Item No. :	KT6351 /KT6352
Box size:	9 x 9 x 10 cm
Carton size:	47 x 47 x 43 cm
Pieces per carton:	50 pcs
Each carton :	0.094 m ³

KT6351- 1
12x 12 x 10 cm
62.5 x 26 x 53 cm
50 pcs
0.085 m ³

Recessed D.L



MR16 / GU10

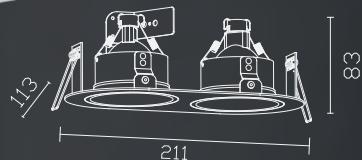

ACCESSORIES



TECHNICAL DATA

Lampholder :

L1 / L2

Socket:

G5.3

Input:

12V 50Hz

Lamp Type :

MR16 QR-CBC-51

Max 50W

L3 / L4

GZ10

230V 50Hz

GU10 OPAR51

Max 50W

IP rating:

IP20

Main Material:

Aluminium

Surface Finish:

White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome

Adjustable direction:

Tilttable

Installation Accessories:

Single Acticon Spring

PACKING

Item No. :

ALL

Box size:

22 x 12 x 10 cm

Carton size:

45.5 x 38 x 43 cm

Pieces per carton:

24 pcs


Each carton :

0.074 m³

KETAI


Recessed D.L

MR16 / GU10
0.5m
IP20
F
III / □




KT6001

Φ 82 mm




KT6001S

82x82 mm

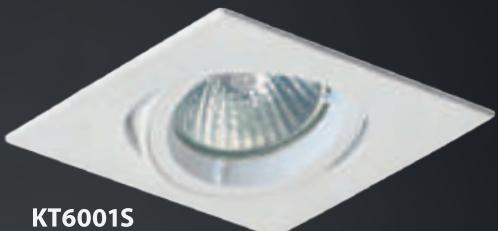


KT6002

Φ 70 mm



KT6002S

70x70 mm



ACCESSORIES



L2



L4

TECHNICAL DATA

Socket:

G5.3

Input:

12V 50Hz

Lamp Type :

MR16 QR-CBC-51

GZ10

230V 50Hz

GU10 QPAR51

Max 50W

IP rating:

IP20

Main Material:

Aluminium

Surface Finish:

White/Black/Grey/Chrome/Satin Nickel

Adjustable direction:

Tilttable / Fixed

Installation Accessories:

Single Acticon Spring

Optics:

Vacuum metallized reflector

PACKING

Item No. :

KT6001/KT6001G

Box size:

9.7x5x9.8 cm

Carton size:

50x22x52 cm

Pieces per carton:

100 pcs

KT6002/KT6002G

8.5x8.5x5 cm

44.5x18.5x 28 cm

50 pcs

Each carton :

0.058 m³

0,023 m³

J11



Recessed D.L

MR16 / GU10
      



KT6001F

 $\Phi 85 \text{ mm}$

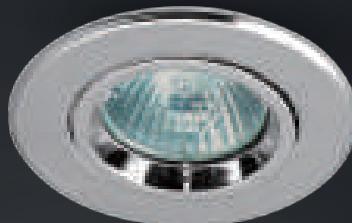

KT6002F



ACCESSORIES



L1

L2

L3

L4

TECHNICAL DATA

Item No. :	L 1 / L 2	L 3 / L 4
Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel
Adjustable direction:	Tilttable / Fixed
Installation Accessories:	Single Acticon Spring
Optics:	Vacuum metallized reflector

PACKING

Item No. :	KT6001F	KT6002F
Box size:	11.5x5x10 cm	6.8x6.8x3.8 cm
Carton size:	48x27x53 cm	36 x 29 x 22 cm
Pieces per carton:	100 pcs	100 pcs

KETAI

Recessed D.L


MR16 / GU10





KT6043



KT6161



J13



KT6188



ACCESSORIES



L1



L2



L3



L4

TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
Cutout:	Ø73 mm	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel	
Adjustable direction:	Fixed	
Installation Accessories:	Single Acticon Spring	
Optics:	3mm tempered center-frosted glass	


PACKING

Item No. :	All Model
Box size:	9.7x5x9.8 cm
Carton size:	50x22x52 cm
Pieces per carton:	100 pcs
Each carton :	0.058 m ³

Recessed D.L

0.5m IP65

MR16 / GU10




KT6602



KT6601



KT6603



KT6190



KT6191



ACCESSORIES



L1



L2



L3



L4

TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Scoket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
Cutout:	Φ75 mm	
IP rating:	IP65 / IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel	
Adjustable direction:	Fixed	
Installation Accessories:	Single Acticon Spring	
Optics:	3mm mechanical-press curved glass	

PACKING

Item No. :	All Model
Box size:	9.2x9.2x7.2 cm
Carton size:	48x20x39 cm
Pieces per carton:	50 pcs
Each carton :	0.037 m ³

KETAI

Recessed D.L

MR16 / GU10



KT6170



KT6171




KT6172



KT6170A



KT6171A



KT6172A



ACCESSORIES



L1



L2



L3



L4

TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type:	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
Cutout:	Ø72 mm	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel	
Adjustable direction:	Fixed	
Installation Accessories:	Single Acticon Spring	
Optics:	3mm tempered center-frosted glass / None	


PACKING

Item No. :	All Model
Box size:	9.3x9.3x4.5 cm
Carton size:	48x20x25.5 cm
Pieces per carton:	50 pcs
Each carton :	0.025 m ³

Recessed D.L




MR16 / GU10

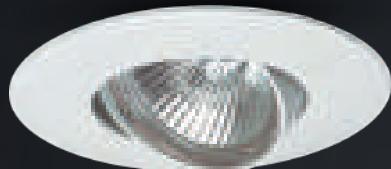


KT6314

Φ 75mm




KT6315

75x75mm

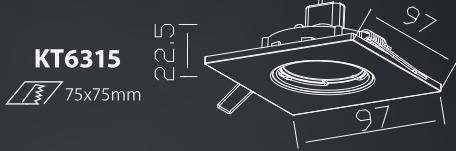

KT6015

Φ 75mm

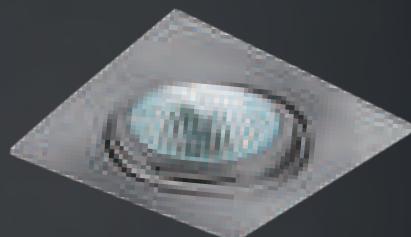

KT6090

73x73 mm



ACCESSORIES



L1

L2

L3

L4

TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
Cutout:	Φ 75 mm	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome	
Adjustable direction:	Tilttable	
Installation Accessories:	Single Action Spring	
Optics:		


PACKING

Item No. :	KT6015	KT6314 / KT6315	KT6090
Box size:	9x3.5x9 cm	10.5x4.5x10.5 cm	8.5x3.5x10cm
Carton size:	47x19.5x20.5 cm	54.5x47.5x24 cm	44.5x19.5x43 cm
Pieces per carton:	50 pcs	50 pcs	100 pcs
Each carton :	0.019 m ³	0.062 m ³	0.037 m ³


KETAI

Recessed D.L


MR16 / GU10

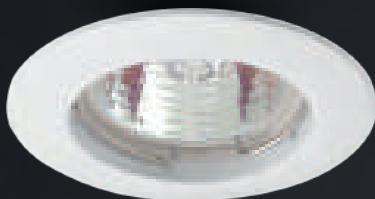


KT6023
Φ 65 mm



KT6144
Φ 68 mm



KT6145
Φ 68 mm



ACCESSORIES





TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
Cutout:	Ø 72 mm	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome	
Adjustable direction:	Tilttable / Fixed	
Installation Accessories:	Leaf Clip / Single Acticon Spring	

PACKING

Item No. :	KT6023	KT6144/KT6145
Box size:	9 x 4 x 9 cm	8.5x4.5x8.5 cm
Carton size:	47.5 x 22.5 x 39 cm	44.5x18.5x25.5 cm
Pieces per carton:	100 pcs	50 pcs
Each carton :	0.042 m ³	0.021 m ³

Recessed D.L

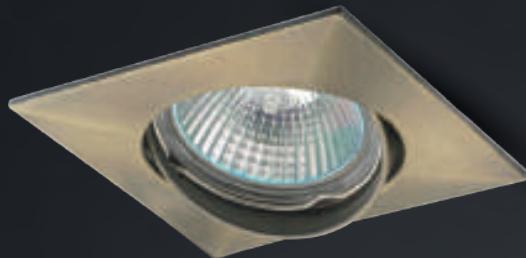


KT6132

76x76 mm

KT6131

62x62 mm

J18



ACCESSORIES



TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Tiltable / Fixed
Installation Accessories:	Single Acticon Spring
Optics:	

PACKING


Item No. :	KT6131	KT6132
Box size:	7.5x3.5x8.5cm	9.5x3.5x10.5 cm
Carton size:	38x36x20.5 cm	48x19.5x45 cm
Pieces per carton:	50 pcs	100 pcs
Each carton :	0.028 m ³	0.042 m ³

Recessed D.L

MR16 / GU10




KT6723
80x80 mm



KT6243
68x68 mm



KT6727
68x68mm



ACCESSORIES



TECHNICAL DATA

Lampholder:	L1 / L2
Scocket:	G5.3
Input:	12V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W

L3 / L4
GZ10
230V 50Hz

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Fixed
Installation Accessories:	Single Acticon Spring

PACKING

Item No. :	KT6723
Box size:	9 x 9 x 5 cm
Carton size:	47 x 19.5 x 28 cm
Pieces per carton:	50 pcs
Each carton :	0.026 m ³





KT6727/KT6243
9.5 x 8 x 6.5 cm
47 x 34 x 35.5 cm

100 pcs
0.057 m ³

Recessed D.L



MR16 / GU10

**KT6058****KT6058S**

ACCESSORIES



L1

L2

L3

L4

TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
Cutout:	Ø 91 mm	Ø 91 mm
IP rating:	IP20	IP20
Main Material:	Aluminium	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Tiltable	Tiltable
Installation Accessories:	Single Action Spring	Single Action Spring
Optics:		

PACKING

Item No. :	All Model
Box size:	12 x 11 x 6 cm
Carton size:	57 x 25.5 x 33 cm
Pieces per carton:	50 pcs
Each carton :	0.048 m ³

J20


KETAI

Recessed D.L


MR16 / GU10




KT6066




KT6065



KT6319



KT6320



ACCESSORIES



L1

L2

L3

L4

TECHNICAL DATA

Lampholder :	L1 / L2
Socket:	G5.3
Input:	12V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W

L3 / L4
GZ10
230V 50Hz
GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Fixed
Installation Accessories:	Single Action Spring

PACKING

Item No. :	KT6605
Box size:	8.5 x 8.5 x 5.5 cm
Carton size:	49.5 x 39.5 x 22 cm
Pieces per carton:	50 pcs
Each carton :	0.043 m ³

KT6606/KT6319/ KT6320
10 x 10 x 4 cm
52 x 52 x 18.5 cm
100 pcs
0.011 m ³

Recessed D.L




MR16 / GU10




KT6187



Φ 76 mm

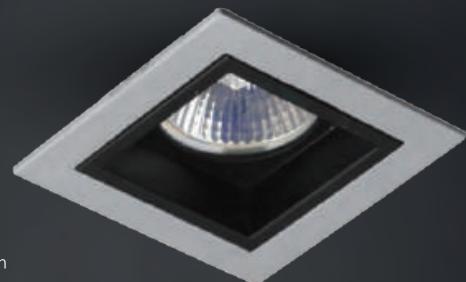

KT6189



J22

ACCESSORIES



L1

L2

L3

L4

TECHNICAL DATA

Lampholder :	L1 / L2
Socket:	G5.3
Input:	12V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W

L3 / L4
GZ10
230V 50Hz
GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Fixed
Installation Accessories:	Single Action Spring


PACKING

Item No. :	All Model
Box size:	9 x 5 x 9 cm
Carton size:	47 x 40 x 28 cm
Pieces per carton:	50 pcs
Each carton :	0.05 m ³

KETAI


Recessed D.L

MR16 / GU10

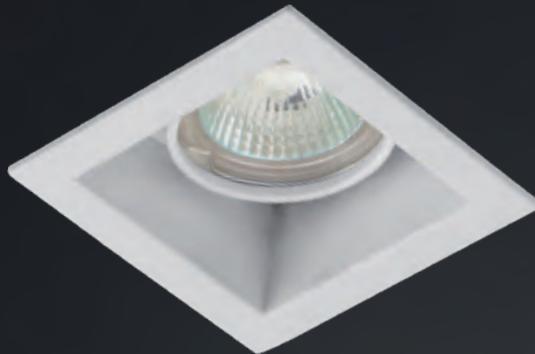



KT6221

76x76 mm




KT6202

82x82 mm

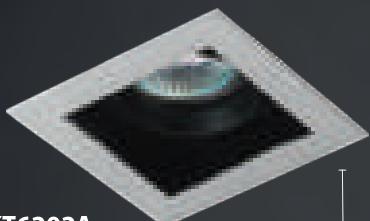

KT6202A

82x82 mm



ACCESSORIES



L1 L2 L3 L4

TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Scocket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Fixed
Installation Accessories:	Single Action Spring

PACKING

Item No. :	KT6620	KT6202	KT602A
Box size:	10 x 10 x 7 cm	10 x 10 x 6 cm	10 x 10 x 12.5 cm
Carton size:	52 x 21.5 x 38 cm	52 x 21.5 x 33 cm	42 x 21.5 x 40.5 cm
Pieces per carton:	50 pcs	50 pcs	50 pcs
Each carton :	0.043 m ³	0.037 m ³	0.037 m ³

J23



Recessed D.L




KT6241
Φ 76 mm



KT6276
78x78 mm

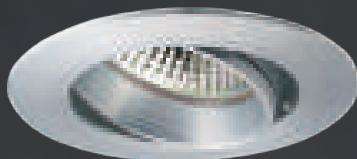

KT6240
Φ 72 mm



ACCESSORIES



L1

L2

L3

L4

TECHNICAL DATA

Lampholder :

L1 / L2

Socket:

G5.3

Input:

12V 50Hz

Lamp Type :

MR16 QR-CBC-51
Max 50W

L3 / L4

GZ10

230V 50Hz

GU10 QPAR51
Max 50W

IP rating:

IP20

Main Material:

Aluminium

Surface Finish:

White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome

Adjustable direction:

Tilttable

Installation Accessories:

Single Action Spring

PACKING

Item No. :

KT6241

Box size:

9.5 x 9.5 x 7 cm

Carton size:

49.5 x 20.5 x 38 cm

Pieces per carton:

50 pcs

Each carton :

0.039 m³

KT6240

9.3 x 9.3 x 4.5 cm

48.5 x 20 x 25.5 cm

50 pcs

0.025 m³

KT6276

11 x 9 x 6 cm

57.5 x 19.5 x 33 cm

50 pcs

0.037 m³

KETAI


Recessed D.L

MR16 / GU10




KT6359

94 x 94 mm



KT6358

Φ 94 mm



ACCESSORIES



L1

L2

L3

L4

TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	WH, CH, BK
Adjustable direction:	Fixed
Installation Accessories:	Single Acticon Spring

PACKING


Box size:	14 x 10 x 7.5 cm
Carton size:	52 x 29.5 x 40.5 cm
Pieces per carton:	50 pcs
Each carton :	0.062 m ³

Recessed D.L




KT6101

Φ110 mm





KT6160

Φ90mm



KT6102

Φ110 mm



ACCESSORIES



L1

L2

L3

L4

TECHNICAL DATA

Lampholder :	L1 / L2	L3 / L4
Scocket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W

IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey/Chrome/Satin Nickel/Gold/Antique/Matt chrome
Adjustable direction:	Tilttable / Fixed
Installation Accessories:	Double Acticon Spring

PACKING


Item No:	KT6160	KT6101 / KT6102
Box size:	13 x 13 x 5 cm	13.5 x 13.5 x 6 cm
Carton size:	67.5 x 29.5 x 40.5 cm	70 x 28.5 x 33 cm
Pieces per carton:	50 pcs	50 pcs
Each carton :	0.062 m ³	0.066 m ³

KETAI


Recessed D.L




KT6175



KT6177



KT6178



KT6181




TECHNICAL DATA

Socket:	GY6.35
Input:	12V 50Hz
cutout:	QT 12 JC GY6.35 Max 50W
Lamp Type :	Φ 100mm
IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Black/Grey
Adjustable direction:	Fixed
Installation Accessories:	Leaf Clip
Wiring:	W/ Terminal Block
Optics:	3mm tempered side-frosted drop glass

PACKING

Box size:	12.5 x 11.5 x 10.5 cm
Carton size:	59.5 x 26.5 x 55.5 cm
Pieces per carton:	50 pcs
Each carton :	0.088 m ³

Recessed D.L



KT6099
Ø 102 mm

TECHNICAL DATA

Item No. :	KT6227	Item No. :	KT6099
Socket:	GY6.35		
Input:	12V 50Hz		
Lamp Type :	QT12 GY6.35 Max 50W		
IP rating:	IP20		
Main Material:	Aluminium		
Surface Finish:	WH, CH, GN		
Adjustable direction:	Fixed		
Installation Accessories:	Single Acticon Spring Double Acticon Spring		
Wiring:	GY6.35 lampholder / 15cm cable, optional connection box		
Optics:	3mm tempered center-frosted glass		

PACKING

Box size:	11 x 11 x 9 cm	12.5 x 12.5 x 10 cm
Carton size:	57 x 23.5 x 48 cm	64.5 x 26.5 x 53 cm
Pieces per carton:	50 pcs	50 pcs
Each carton :	0.029 m ³	0.091 m ³

KETAI

Aluminium spot Light



8001


Input: 230V AC 50Hz
Lamp Type : G5.3 MR16 Max 50W
/GU10 QPAR Max 50W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



8002



8003



K01

ACCESSORIES



3 Wire



HKTA



KTWA



2 Wire



HKT



KTW




2 Wire



KTK1



DL

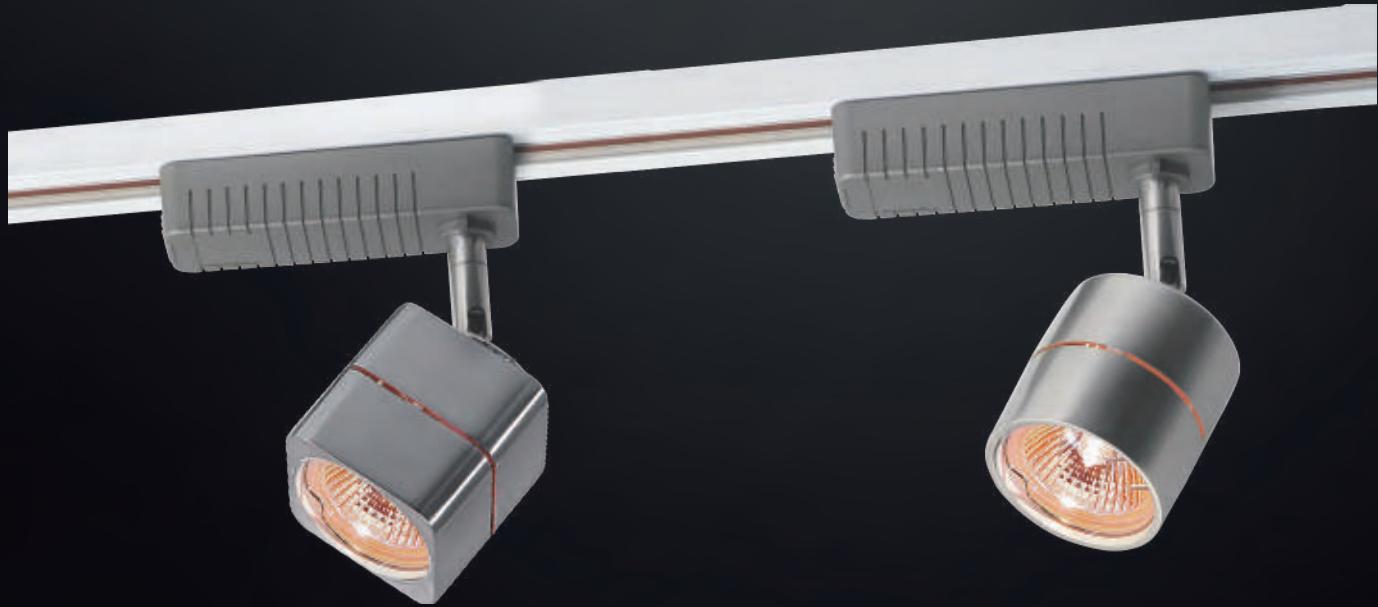

Track Light

Aluminium spot Light



8010

Input: 230V AC 50Hz
 Lamp Type : G5.3 MR16 Max 50W
 /GU10 QPAR Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal

8010A



ACCESSORIES



3 Wire



HKTA



KTWA



2 Wire



HKT



KTW



2 Wire



KTK1



DL

Aluminium spot Light



8020

Input: 230V AC 50Hz
 Lamp Type : G5.3 MR16 Max 50W
 /GU10 QPAR Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



KTWA



2 Wire



HKT



KTW



2 Wire



KTK1



DL

Track Light

Aluminium spot Light

8096

Input: 230V AC 50Hz
 Lamp Type : G5.3 MR16 Max 50W
 /GU10 QPAR Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



K03

ACCESSORIES



3 Wire



HKTA



KTWA



2 Wire



HKT



KTW



DL




HC

Aluminium spot Light



8090

Input: 230V AC 50Hz
 Lamp Type : G5.3 MR16 Max 50W
 /GU10 QPAR Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal

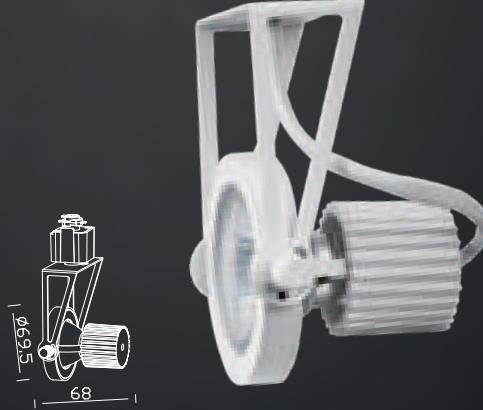

ACCESSORIES



3 Wire



HKTA



KTWA



2 Wire



HKT



KTW



DL



HC

KETAI

Track Light

Gu10 Aluminium spot Light

8121



Input: 230V AC 50Hz
Lamp Type : G5.3 MR16 Max 50W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



KTWA



2 Wire



HKT



KTW



DL




HC

MR16 Aluminium spot Light

8061



Input: 230V AC 50Hz
Lamp Type : GU10 QPAR Max 50W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal

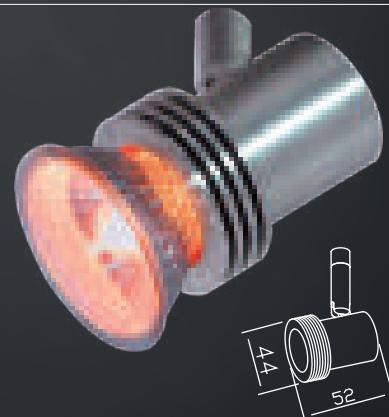

ACCESSORIES



3 Wire



HKTA



KTWA



2 Wire



HKT



KTW



DL


K04

Track Light

GU10 Aluminium spot Light

8141

Input: 230V AC 50Hz
 Lamp Type : GU10 QPAR Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL




HC

GU10 Aluminium spot Light

8130

Input: 230V AC 50Hz
 Lamp Type : GU10 QPAR Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC

Track Light

GU10 Aluminium spot Light



8138

Input: 230V AC 50Hz
 Lamp Type : GU10 QPAR Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC

K06

GU10 Aluminium spot Light



8127

Input: 230V AC 50Hz
 Lamp Type : GU10 QPAR Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC

Track Light

GU10 Aluminium spot Light



8128

Input:

230V AC 50Hz

Lamp Type :

GU10 QPAR Max 50W

Main Material:

Aluminium

Surface Finish:

White/Black/Grey Powder Coating

Chrome/Satin Nickel

Adjustable direction: Gimbal



K07

ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC

GU10 Aluminium spot Light



8129

Input:

230V AC 50Hz

Lamp Type :

GU10 QPAR Max 50W

Main Material:

Aluminium

Surface Finish:

White/Black/Grey Powder Coating

Chrome/Satin Nickel

Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC

KETAI


Track Light

GU10 Aluminium spot Light

8125



Input: 230V AC 50Hz
Lamp Type : GU10 QPAR Max 50W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC

GU10 Aluminium spot Light

8133



Input: 230V AC 50Hz
Lamp Type : GU10 QPAR Max 50W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC

K08

Track Light

GU10 Aluminium spot Light




8126

Input: 230V AC 50Hz
Lamp Type : GU10 QPAR Max 50W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES

K09



3 Wire HKTA



2 Wire HKT



2 Wire KTK1 DL HC

GU10 Aluminium spot Light



8139

Input: 230V AC 50Hz
Lamp Type : GU10 QPAR Max 50W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES



3 Wire HKTA



2 Wire HKT




2 Wire KTK1 DL HC

Track Light**MR16 Aluminium spot Light****8015**

Input:	230V AC 50Hz
Lamp Type :	G5.3 MR16 Max 50W
Main Material:	Aluminium
Surface Finish:	White/Black/Grey Powder Coating Chrome/Satin Nickel

Adjustable direction: Gimbal

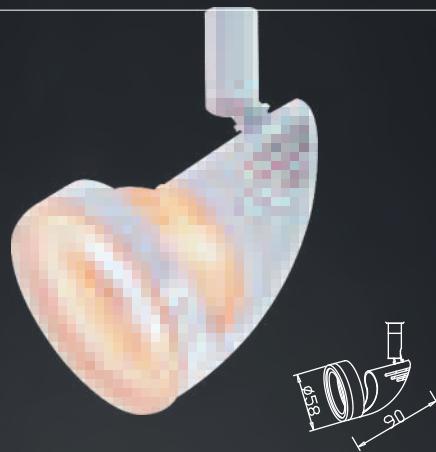**ACCESSORIES**

3 Wire



KTWA



2 Wire



KTW



KTQ



DL

MR16 Aluminium spot Light**8023**

Input:	230V AC 50Hz
Lamp Type :	G5.3 MR16 Max 50W
Main Material:	Aluminium
Surface Finish:	White/Black/Grey Powder Coating Chrome/Satin Nickel

Adjustable direction: Gimbal

**ACCESSORIES**

3 Wire



KTWA



2 Wire



KTW



KTQ



DL

KETAI

MR16 Aluminium spot Light

Track Light



Input: 230V AC 50Hz
Lamp Type : G5.3 MR16 Max 50W
Main Material: Aluminum
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES



3 Wire



KTWA



2 Wire



KTW



KTQ



DL

MR16 Aluminium spot Light



8079

Input: 230V AC 50Hz
Lamp Type : G5.3 MR16 Max 50W
Main Material: Aluminum
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES



3 Wire



KTWA



2 Wire



KTW



KTQ



DL


Track Light



MR16 Aluminium spot Light

8039

Input: 230V AC 50Hz
 Lamp Type : G5.3 MR16 Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



KTWA



2 Wire



KTW



KTO



DL



HC

K12

MR16 Aluminium spot Light



8108

Input: 230V AC 50Hz
 Lamp Type : G5.3 MR16 Max 50W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



Track Light

E27 Aluminium spot Light



8641

Input: 230V AC 50Hz
 Lamp Type : E27 PAR38 Max 120W
 Main Material: Aluminum
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



8643

E27
PAR30 Max 70W

ACCESSORIES



4 Wire



4 Wire



3 Wire



2 Wire



2 Wire



MHT1



MHT



HKTA



HKT



KTK1



DL



HC

E27 Aluminium spot Light




122

Input: 230V AC 50Hz
 Lamp Type : E27 PAR38 Max 120W
 Main Material: Aluminum
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



123

Lamp Type : E27 PAR30Max 75W



ACCESSORIES



4 Wire



MHT1



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC


Track Light

E27 Aluminium spot Light



126

Input: 230V AC 50Hz
 Lamp Type : E27 PAR30 Max 75W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal

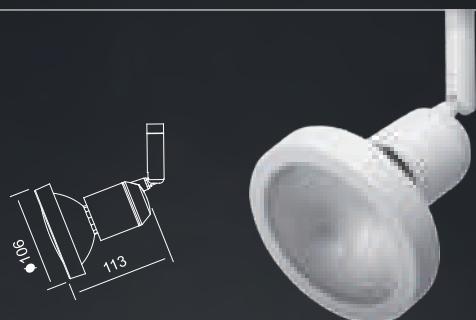

ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC


K14

E27 Aluminium spot Light



127

Input: 230V AC 50Hz
 Lamp Type : E27 PAR38 Max 120W
 Main Material: Aluminium
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC

E27 Steel spot Light

151

Input: 230V AC 50Hz
Lamp Type : E27 PAR30 Max 75W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL




HC

E27 Steel spot Light



152

Input: 230V AC 50Hz
Lamp Type : E27 PAR20 Max 50W
Main Material: Aluminium
Surface Finish: White/Black/Grey Powder Coating
Chrome/Satin Nickel
Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC


Track Light



E27 Steel spot Light

150

Input: 230V AC 50Hz
 Lamp Type : E27 PAR38 Max 120W
 Main Material: Aluminum
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL




HC

E27 Aluminium spot Light



8140

Input: 230V AC 50Hz
 Lamp Type : E27 PAR30 Max 75W
 Main Material: Aluminum
 Surface Finish: White/Black/Grey Powder Coating
 Chrome/Satin Nickel
 Adjustable direction: Gimbal



ACCESSORIES



3 Wire



HKTA



2 Wire



HKT



2 Wire



KTK1



DL



HC



KETAI

Track Light

A grid of track light models from KETAI, arranged in five columns and six rows. The columns are labeled at the top: 8001, 8002, 8003, 8010, and 8010A. The rows are labeled on the left: HKTA, HKT, KTK1, KTWA, KTW, and DL. Each cell in the grid contains a photograph of a specific track light model from that row and column combination.

The image displays a collection of track lighting fixtures from the HK series, arranged in a grid format. The fixtures are categorized by model number and type. The categories are as follows:

- HKTA**: Models 8096, 8090, 8121, and 8061.
- HKT**: Models 8096, 8090, 8121, and 8061.
- KTWA**: Models 8096, 8090, 8121, and 8061.

Each model is shown in a 3D perspective view, highlighting its unique design features such as the head orientation, mounting arm, and light source type (e.g., LED or incandescent).

Track Light

KETAI

8096

8090


8121

8061


KTW



DL

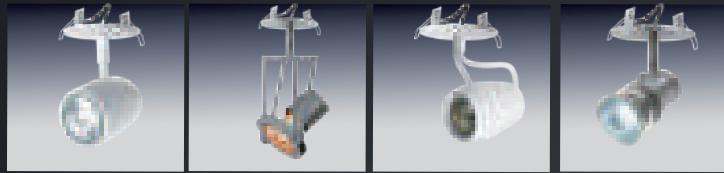

HC

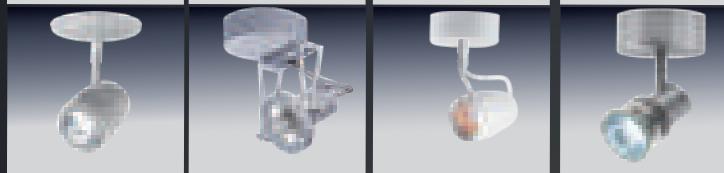

K18

8141 (GU10)

8125 (GU10)

8126 (GU10)

8127 (GU10)

8128 (GU10)

HKTA



HKT



KTK1



DL



HC



KETAI

Track Light

K19



Track Light

KETAI

8015

8023

8079

8087

KTWA



KTW



DL



HC



8039

8108 (AR111)

KTWA



KTW




DL



HC



KTQ



K20

KETAI

Track Light

8641 (PAR38)



HKTA

8643 (PAR30)



122 (PAR38)



8140 (PAR30)



K21

HKT

KTK1

MHT-H1

MHT-H3

DL

HC

Track Light

KETAI




KETAI



Recessed DownLight

D^{0.3in} CE RoHS



KT6390-1

TECHNICAL DATA


Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51 Max 50W	GU10 QPAR51 Max 50W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey powder coating	
Adjustable direction:	Tiltable	
Installation Accessories:	Single Acticon Spring	
MOQ:	300 pcs	

PACKING

Box size: 9.5 x 9.5 x 5 cm
Carton size: 49.5 x 20.5 x 27.5 cm
Pcs per carton: 50 pcs
Each carton : 0,027 m³

KETAI

Recessed DownLight

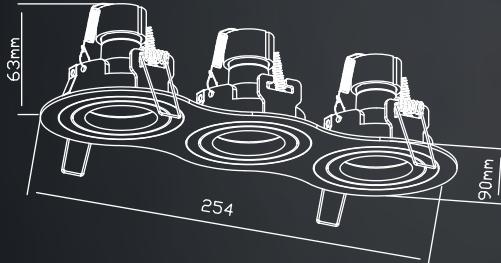

KT6390-3




L02

TECHNICAL DATA

Socket:	G5.3	GZ10
Input:	12V 50Hz	230V 50Hz
Lamp Type :	MR16 QR-CBC-51	GU10 QPAR51
	Max 50W	Max 50W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey powder coating	
Adjustable direction:	Tilttable	
Installation Accessories:	Single Acticon Spring	
MOQ:	300 pcs	

PACKING

	KT6390-3	KT6390-3
Box size:	9.5 x 5 x 19 cm	11 x 5 x 26.5 cm
Carton size:	49.5 x 20 x 32.5 cm	46 x 20 x 32.5 cm
Pcs per carton:	30 pcs	24 pcs
Each carton :	0,032 m ³	0,041 m ³

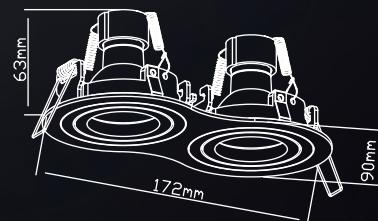


KT6390-2




KT16D-1

89x89 mm




KT16D-2

155x89 mm



KT16D-3

235x89 mm

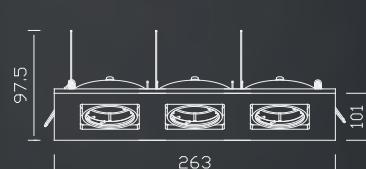

TECHNICAL DATA

Item No.:

KT16D-1

KT16D-2

KT16D-3

Input:

12V AC 50Hz

Lamp Type :

G5.3 MR16 QR-CBC-51

Power:

50W

2x50W

3x50W

IP rating:

IP20

Main Material:

Aluminium

Surface Finish:

Brushed surface

Adjustable direction:

Gimbal

Installation Accessories:

Single Action Spring

Wiring:

W/G5.3 lampholder w/20cm cable, optional connection box

PACKING

Box size:

12 x 10.5 x 10.5 cm

20 x 10.5 x 10.5 cm

28 x 10.5 x 10.5 cm

Carton size:

54.5 x 25.5 x 55.5 cm

54.5 x 21.5 x 45 cm

54.5 x 29.5 x 45 cm

Pieces per carton:

12 pcs

20 pcs

20 pcs




Each carton :

0.077 m³

0.053 m³


0.072 m³

MULTIPLE LIGHTS MODULAR

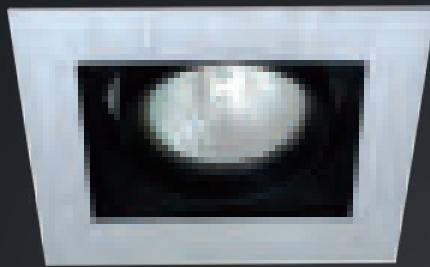



KT6305-1

87x87 mm




KT6305-2

167x87 mm

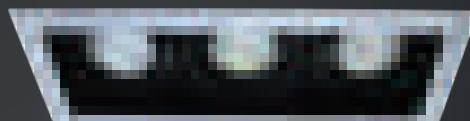

KT6305-3

243x87 mm



TECHNICAL DATA


Item No.:	KT6305-1	KT6305-2	KT6305-3
Input:			
Lamp Type :			
power :	50W	2x50W	3x50W
IP rating:		IP20	
Main Material:		Aluminium and steel	
Surface Finish:		Brushed and anodized	
Adjustable direction:		Gimbal	
Installation Accessories:		Single Action Spring	
Wiring:		W/Connection box	

PACKING


Box size:	11.5 x 11.5 x 8.5 cm	19.5 x 11.5 x 8.5 cm	28 x 11.5 x 8.5 cm
Carton size:	60 x 25 x 45.5 cm	59 x 36.5 x 37 cm	48 x 30 x 54 cm
Pieces per carton:	50 pcs	36 pcs	24 pcs
Each carton :	0.063 m ³	0.063 m ³	0.063 m ³





KT16E-1
95x95 mm




KT16E-3
295x95 mm



KT16E-2
195x95 mm



KT16E-4
195x195 mm



TECHNICAL DATA

Item No.:	KT16E-1	KT16E-2	KT16E-3	KT16E-4
Input:				
Lamp Type :		12V AC 50Hz G5.3 MR16 QR-CBC-51		
power::	50W	1x50W	2x50W	4x50W
IP rating:		IP20		
Main Material:		Aluminium		
Surface Finish:		Brushed surface		
Adjustable direction:		Gimbal		
Installation Accessories:		Bracket		
Wiring:		Connection Box		

PACKING


Box size:	11.8 x 11.8 x 11.5 cm 49 x 37 x 26 cm	21.5 x 11.5 x 11.5 cm 49 x 36.5 x 24.5 cm	31 x 11.8 x 11.5 cm 49 x 25 x 34 cm	21.5 x 11.8 x 21.5 cm 43.5 x 23 x 37.5 cm
Carton size:	24 pcs	12 pcs	8 pcs	6 pcs
Pieces per carton:	0.047 m ³	0.044 m ³	0.042 m ³	0.038 m ³

MULTIPLE LIGHTS MODULAR




KT12P-2

320x170 mm




KT12P-1

170x170 mm



KT12P-3

470x170 mm



TECHNICAL DATA

Item No.:	KT12P-1	KT12P-2	KT12P-3
Input:		230V AC 50Hz	
Lamp Type :		G12 HIT-CE	
power :	70W	2x70W	3x70W
IP rating:		IP20	
Main Material:		Aluminium and steel	
Surface Finish:		White,Black,Grey Powder Coating	
Adjustable direction:		Gimbal	
Installation Accessories:		Leaf Clip	
Wiring:		W/Connection box	
Optics:		Aluminium matt reflector	


PACKING

Box size:	19.5 x 19.5 x 21.5 cm	21.5 x 19.5 x 36.5 cm	21.5 x 19.5 x 53 cm
Carton size:	40.5 x 40.5 x 45.5 cm	44.5 x 38.5 x 61.5 cm	44.5 x 40.5 x 55.5 cm
Pieces per carton:	8 pcs	6 pcs	4 pcs
Each carton :	0.075 m ³	0.104 m ³	0.1 m ³




KT111-1

170x170 mm




KT111-3

470x170 mm





KT111-2

320x170 mm



KT111-4

410x170 mm



KT111-4F

320x320 mm

TECHNICAL DATA

Item No.:	KT111-1	KT111-2	KT111-3	KT111-4	KT111-4F
Input:					
Lamp Type :			12V AC 50Hz G53 QR-LP111		
power::	1x50W	2x50W	3x50W	4x50W	4x50W
IP rating:			IP20		
Main Material:			Steel		
Surface Finish:			White,Black,Grey Powder Coating		
Adjustable direction:			Gimbal		
Installation Accessories:			Bracket		
Wiring:			Connection Box		

PACKING


Box size:	21 x 21 x 19 cm	21 x 11 x 36 cm	21 x 11 x 52 cm	21 x 11 x 65 cm	36 x 11 x 36 cm
Carton size:	44 x 44 x 41 cm	46.5 x 44 x 38 cm	46.5 x 44 x 54 cm	65 x 44 x 24 cm	69 x 37 x 38 cm
Pieces per carton:	8 pcs	8 pcs	8 pcs	4 pcs	6 pcs
Each carton :	0.079 m ³	0.078 m ³	0.110 m ³	0.069 m ³	0.097 m ³

MULTIPLE LIGHTS MODULAR



KT12-1


195x195 mm



224


140

L08

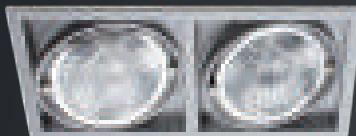

KT12-2

400x195 mm




429



KT12-3

605x195 mm



634

TECHNICAL DATA

Item No.:	KT12-1	KT12-2	KT12-3
Input:		230V AC 50Hz	
Lamp Type :		G12 HIT-CE	
power :	150W	2x150W	3x150W
IP rating:		IP20	
Main Material:		Aluminium	
Surface Finish:		White,Black, Grey Powder Coating	
Adjustable direction:		Gimbal	
Installation Accessories:		Bracket	
Wiring:		W/Connection box	
Optics:		Aluminium anodized faceted reflector	
		3mm tempered clear glass	

PACKING

Box size:	43.5 x 23 x 15 cm	43.5 x 23 x 15 cm	64.5 x 23 x 15 cm
Carton size:	45 x 24.5 x 33 cm	45 x 24.5 x 33 cm	66 x 24.5 x 33 cm
Pieces per carton:	2 pcs	2 pcs	2 pcs
Each carton :	0.036 m ³	0.036 m ³	0.053 m ³


MULTIPLE LIGHTS MODULAR




KT111E-1
158x158 mm



KT111E-4F
315x315 mm




KT111E-2
320x158 mm



KT111E-4
620x158 mm

KT111E-3
480x158 mm





TECH NICAL DATA

Item No.:	KT111E-1	KT111E-2	KT111E-3	KT111E-4	KT111E-4F
Input:					
Lamp Type :		12V AC 50Hz G53 QR-LP111			
power.:	1x50W	2x50W	3x50W	4x50W	4x50W
IP rating:			IP20		
Main Material:			Steel		
Surface Finish:		White,Black,Grey Powder Coating			
Adjustable direction:		Gimbal			
Installation Accessories:		Bracket			
Wiring:		Connection Box			

PACKING

Box size:	19 x 11 x 19.3 cm	19 x 11 x 35.5 cm	19 x 11 x 19.3 cm	19 x 11 x 66.8 cm	35 x 11 x 35 cm
Carton size:	40 x 40 x 47.5 cm	39.5 x 37 x 47 cm	40 x 41 x 47.5 cm	68.3 x 39.5 x 24 cm	36.5 x 36.5 x 47 cm
Pieces per carton:	16 pcs	8 pcs	8 pcs	4 pcs	6 pcs
Each carton :	0.075 m ³	0.069 m ³	0.075 m ³	0.065 m ³	0.063 m ³

MULTIPLE LIGHTS MODULAR




KT12D-1

170x170 mm

KT12D-2

338x170 mm



KT12D-3

550x170 mm

TECHNICAL DATA

Item No.:	KT12D-1	KT12D-2	KT12D-3
Input:			
Lamp Type :		230V AC 50Hz G12 HIT-CE	
power :	150W	2x150W	3x150W
IP rating:		IP20	
Main Material:		Steel	
Surface Finish:		White,Black,Grey Powder Coating	
Adjustable direction:		Gimbal	
Installation Accessories:		Bracket	
Wiring:		W/Connection box	
Optics:		Aluminium matt reflector +3mm tempered center-screened glass	

PACKING

Box size:	19.5 x 19.5 x 20.8 cm	20.8 x 19.5 x 36.3 cm	20.8 x 19.5 x 53 cm
Carton size:	40.5 x 40.5 x 44 cm	60.5 x 43 x 38.8 cm	43 x 40.5 x 55.5 cm
Pieces per carton:	8 pcs	6 pcs	4 pcs
Each carton :	0.072 m ³	0.1 m ³	0.097 m ³



KETAI

MULTIPLE LIGHTS MODULAR



KT111H-2

305x150 mm

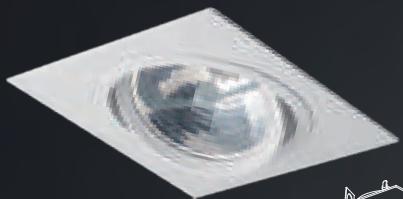

KT111H-1

150x150 mm




KT111H-3

460x150 mm



KT111H-R

150 mm



KT111H-4F

305x305 mm



TECHNICAL DATA

Item No.:	KT111H-1	KT111H-2	KT111H-3	KT111H-4F	KT111H-R
Input:					
Lamp Type :		12V AC 50Hz G53 AR111			
power.:	1x50W	2x50W	3x50W	4x50W	1x50W
IP rating:		IP20			
Main Material:		Aluminium			
Surface Finish:		White,Black,Grey Powder Coating			
Adjustable direction:		Gimbal			
Installation Accessories:		Bracket			
Wiring:		Connection Box			

PACKING

Box size:	18.5 x 7.5 x 18.5 cm	18.5 x 7.5 x 34 cm	18.5 x 7.5 x 49.5 cm	34 x 7.5 x 34 cm	18.5 x 7.5 x 18.5 cm
Carton size:	38.5 x 38.5 x 33 cm	38.5 x 35.5 x 33 cm	51 x 38.5 x 33 cm	35.5 x 32 x 36.5 cm	38.5 x 38.5 x 33 cm
Pieces per carton:	16 pcs	8 pcs	8 pcs	8 pcs	16 pcs
Each carton :	0.049 m ³	0.049 m ³	0.065 m ³	0.041 m ³	0.049 m ³


MULTIPLE LIGHTS MODULAR



KT111N-1



KT111N-2



KT111N-3



L12

TECHNICAL DATA

Item No.:	KT111N-1	KT111N-2	KT111N-3
Input:	12V AC 50Hz		
Lamp Type :	G53 AR111		
power.:	50W	2x50W	3x50W
IP rating:	IP20		
Main Material:	Steel Body, Aluminium Ring		
Surface Finish:	White,Black, Grey Powder Coating		
Adjustable direction:	Gimbal		
Installation Accessories:	Screws		
Wiring:	Terminal Block		

PACKING

Box size:	17 x 17 x 12.5 cm 53 x 35.5 x 27.5 cm	17 x 12.5 x 33 cm 34.5 x 34.5 x 40.5 cm	17 x 12.5 x 49 cm 50.5 x 35.5 x 50.5 cm
Carton size:	12 pcs	6 pcs	6 pcs
Pieces per carton:	0.053 m ³	0.048 m ³	0.091 m ³

Each carton :


KETAI



L13

Recessed DownLight


D_{0.3m} CE RoHS




KT111H-1A



KT111H-2A

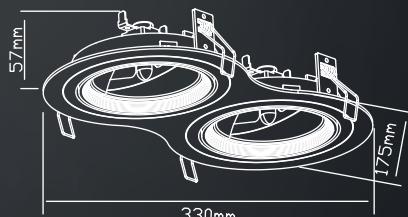

KT111H-3A

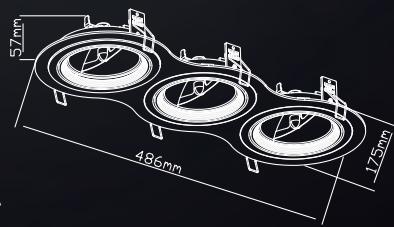


TECHNICAL DATA

Item No.:	KT111H-3A
Input:	12V AC 50Hz
Lamp Type :	G53 QR-LP111
Power.:	3x50W
IP rating:	IP20
Main Material:	Steel
Surface Finish:	White,Black,Gray Powder Coating
Adjustable direction:	Gimbal
Installation Accessories:	Bracket Connection Box
Wiring:	

PACKING

	KT111H-1A	KT111H-2A	KT111H-3A
Box size:	19 x 7 x 19 cm	19 x 7 x 34 cm	19 x 7 x 49.5 cm
Carton size:	44.5 x 39.5 x 44.5 cm	58.5 x 35 x 44.5 cm	50.5 x 39.5 x 44.5 cm
Pcs per carton:	24 pcs	18 pcs	12 pcs
Each carton :	0.07 m ³	0,091 m ³	0,089 m ³

MULTIPLE LIGHTS MODULAR




KT12B-1
150x150 mm



KT12B-2
305x150 mm



KT12B-3
460x150 mm



KT12B-4F
305x305 mm



TECHNICAL DATA


Item No.:	KT12B-1	KT12B-2	KT12B-3	KT12B-4F
Input:				
Lamp Type :				
power :	70W	2x70W	3x70W	4x70W
IP rating:		IP20		
Main Material:		Steel	Aluminium	
Surface Finish:		White,Black,Grey Powder Coating		
Adjustable direction:		Gimbal		
Installation Accessories:		Double Action Spring		
Wiring:		Terminal Block		
Optics:		Anodized aluminium reflector +3mm tempered center-forsted glass		

PACKING

Box size:	18.5 x 17 x 18.5 cm	18.2 x 17 x 34 cm	18.5 x 17 x 49.5 cm	34 x 17 x 34 cm
Carton size:	38.5 x 38.5 x 36.5 cm	57.5 x 35.5 x 36.5 cm	51 x 38.5 x 36.5 cm	70 x 35.5 x 36.5 cm
Pieces per carton:	8 pcs	6 pcs	4 pcs	4 pcs
Each carton :	0.054 m ³	0.075 m ³	0.072 m ³	0.09 m ³

KETAI

Pendant Light

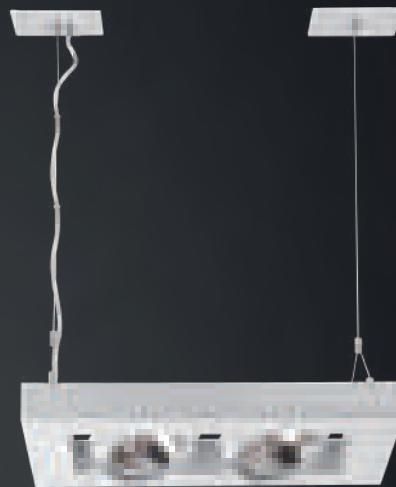

TECHNICAL DATA

Input:	220-240V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/wire
Optics:	V.M. Reflector
MOQ	102 pcs

SL361-2


Lampholder type	G53
Lamp type	2 x 50 W
Control Gear	KET-50E

PACKING

Box size:	47 x 28.5 x 9 cm
Carton size:	48 x 29.5 x 56.5 cm
Pcs per carton:	6 pcs
Each carton :	0.08m ³

KETAI

Pendant Light

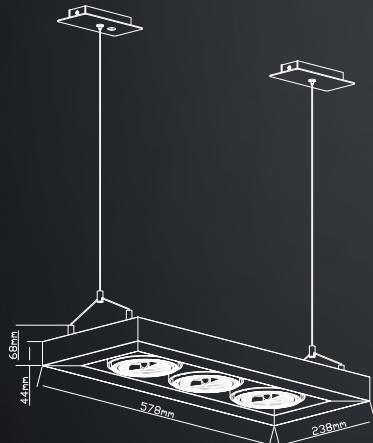

SL361-3

Lampholder type	G53
Lamp type	2 x 50 W
Control Gear	KET-50E

TECHNICAL DATA

Input:	220-240V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/wire
Optics:	V.M. Reflector
MOQ	102 pcs

PACKING


Box size:	62.5 x 28.5 x 9 cm
Carton size:	63.5 x 29.5 x 38 cm
Pcs per carton:	4 pcs
Each carton :	0,07m ³



KETAI




CFL D.L

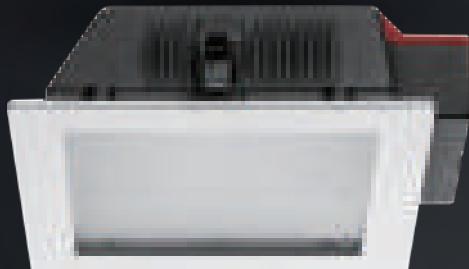

MH1094
G24D3
TC-D
Max. 2x26W

215x195 mm



MH1096
G24D3
TC-D
Max. 2x26W

Φ210 mm



TECHNICAL DATA

Item No.:	MH1094		MH1096
Input:	230V AC 50Hz		
Lamp Type :	G24d-3 TC-D Max 2x26W		
Cutout diameter:	215 x 195 mm		Φ 210mm
IP rating:	IP20		
Main Material:	Aluminium		
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze		
Adjustable direction:	Fixed		
Installation Accessories:	Bracket		
Wiring:	W/Flexible Wire W/Striped End		
Optics:	Aluminium vacuum metallized Reflector		

PACKING

Box size:	25.5 x 12.5 x 26 cm	25.5 x 14.5 x 27 cm
Carton size:	53.5 x 52.5 x 27 cm	55.5 x 52.5 x 31 cm
Pieces per carton:	8 pcs	8 pcs
Each carton :	0.0 m ³	0.0 m ³


KETAI

CFL D.L



MH1025

210 mm



M10


MH1022D

210 mm



MH1022S

145 mm




TECHNICAL DATA

Item No.:	MH1025	MH1022D	MH1022S
Socket:	G24D3	E27	E27
Lamp Type :	TC-D Max 2x26W	TC-TSE Max 2x25W	TC-TSE Max 2x25W
Input:		230V AC 50Hz	
IP rating:		IP20	IP20
Main Material:		Aluminium	Aluminium
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze		
Adjustable direction:	Fixed		
Installation Accessories:	Double Action spring		
Wiring:	Terminal block		
Optics:	Aluminium vacuum metalized Reflector		
	4mm tempered glass with sun flower pattern		3mm tempered dotted glass

PACKING



Box size:	24 x 24 x 12 cm	18.5 x 11.5 x 16.2 cm
Carton size:	74 x 25 x 51 cm	46 x 20 x 51.5 cm
Pieces per carton:	12 pcs	12 pcs
Each carton :	0.094 m ³	0.047 m ³

CFL D.L

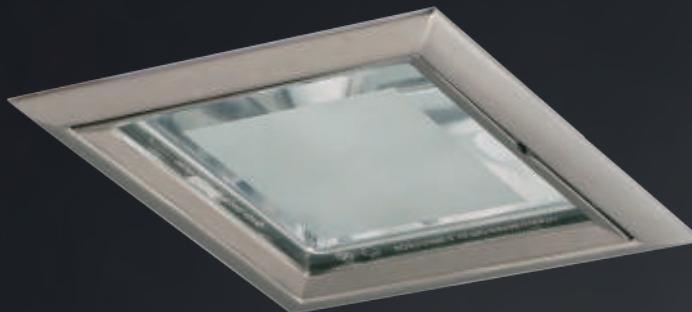


KT7084

205x205 mm

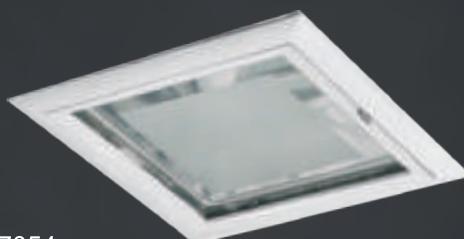

KT7054

165x165 mm



TECHNICAL DATA

Item No.:	KT7084	KT7054
Scoket:	G24D3	G24D1
Lamp Type :	TC-D Max 2x26W	TC-D Max 2x13W
Input:	230V AC 50Hz	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze	
Adjustable direction:	Fixed	
Installation Accessories:	Bracket	
Wiring:	Terminal block	
Optics:	Aluminium vacuum metalized Reflector + 3mm tempered center-frosted glass	

PACKING

Item No.:	KT7084	KT7054
Box size:	23.5 x 20 x 13 cm	25 x 25 x 12.5 cm
Carton size:	72.5 x 21.5 x 55 cm	51.5 x 26.5 x 40 cm
Pieces per carton:	12 pcs	6 pcs
Each carton :	0.086 m ³	0.055 m ³


KETAI

CFL D.L



M12

MH1080
225x225 mm



TECHNICAL DATA

Item No.:	MH1080	
Socket:	G24D3	E27
Lamp Type :	TC-D Max 2x26W	TC-TSE Max 2x18W
Input:	230V AC 50Hz	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze	
Adjustable direction:	Fixed	
Installation Accessories:	Bracket	
Wiring:	Terminal block	
Optics:	Aluminium vacuum metalized Reflector + Steel cross louvre	

PACKING

Box size:	24.5 x 14 x 29 cm
Carton size:	44 x 26 x 60.5 cm
Pieces per carton:	6 pcs
Each carton :	0.069 m ³

CFL D.L



MH1030

110 mm



MH1043

176 mm



MH1029

110 mm



TECHNICAL DATA

Item No.:	MH1030	MH1043	MH1029
Socket:	G24D1	E27	G24D1
Lamp Type :	TC-D Max 13W TC-TSE Max 15W	230V AC 50Hz	TC-D Max 2X13W
Input:		IP20	
IP rating:			
Main Material:		Aluminium	
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze		
Adjustable direction:	Fixed		
Installation Accessories:	Double Action spring		
Wiring:	Terminal block		
Optics:	Aluminium vacuum metalized Reflector 3mm dotted glass 3mm tempered center-frosted glass		

PACKING

Item No.:	MH1030	MH1043
Box size:	14 x 14 x 19.5 cm	20 x 20 x 23.5 cm
Carton size:	58 x 44 x 42 cm	62 x 41.5 x 49.5 cm
Pieces per carton:	24 pcs	12 pcs
Each carton :	0.107 m ³	0.127 m ³


KETAI

CFL D.L




KT7063XA

175 mm




M14



KT7063GA

175 mm



KT7063A

175 mm


TECHNICAL DATA

Item No.:	KT7063A	KT7063GA	KT7063XA
Socket:	G24D2	TC-T Max 2x18W	
Lamp Type :	230V AC 50Hz		
Input:	IP20		
IP rating:	Aluminium	Aluminium louvre	
Main Material:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze		
Surface Finish:			
Adjustable direction:	Fixed		
Installation Accessories:	Leap Clip		
Wiring:	Terminal block		
Optics:	Aluminium vacuum metalized Reflector + 3mm tempered center-frosted glass	Aluminium vacuum metalized Reflector	

PACKING

Box size:	24.5 x 14 x 29 cm
Carton size:	44 x 26 x 60.5 cm
Pieces per carton:	6 pcs
Each carton :	0.069 m ³

CFL D.L




KT7083GA
210 mm



KT7083A
210 mm



KT7083XA
210 mm



TECHNICAL DATA


Item No.:	KT7083A	KT7083GA	KT7083XA
Socket:	G24D3		
Lamp Type :	TC-T Max 2x26W		
Input:	230V AC 50Hz		
IP rating:	IP20		
Main Material:	Aluminium		Aluminum louvre
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze		
Adjustable direction:	Fixed		
Installation Accessories:	Leap Clip		
Wiring:	Terminal block		
Optics:	Aluminum vacuum metalized Reflector	Aluminium vacuum metallized Reflector 3mm tempered center-frosted glass	Aluminum vacuum metalized Reflector

PACKING

Box size:	24.5 x 13 x 35 cm
Carton size:	75.5 x 36.5 x 28.5 cm
Pieces per carton:	12 pcs
Each carton :	0.079 m ³

KETAI

CFL D.L




KT7103A

240 mm




KT7103GA

240 mm



KT7103XA

240 mm



TECHNICAL DATA

Item No.:	KT7103A	KT7103GA	KT7103XA
Socket:	G24q-4		
Lamp Type :	TC-TEL Max 2x42W		
Input:	230V AC 50Hz		
IP rating:	IP20		
Main Material:	Aluminium		Aluminum louvre
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze		
Adjustable direction:	Fixed		
Installation Accessories:	Leap Clip		
Wiring:	Terminal block		
Optics:	Aluminium vacuum metализированная рефлектор	Aluminium vacuum metalized Reflector + 3mm tempered center-frosted class	Aluminium vacuum metализированная рефлектор

PACKING

Box size:	26.5 x 13 x 36 cm
Carton size:	81.5 x 37.5 x 28.5 cm
Pieces per carton:	6 pcs
Each carton :	0.087 m ³

CFL D.L



TECHNICAL DATA

Item No.:	FIX8	FIX10	FIX12	FIX13
Socket:	E27			
Lamp Type :	TC- TSE Max 5W	TC- TSE Max 11W	TC- TSE Max 15W 230V AC 50Hz	TC- TSE Max 15W
Input:			IP20	
IP rating:			Steel	
Main Material:				White/Chrome/Satin nickel/Gold/Antique brass/Bronze
Surface Finish:				Fixed
Adjustable direction:				Double Action spring
Installation Accessories:				Directly to terminal on lampholder
Wiring:				Aluminium vacuum metalized Reflector
Optics:				

PACKING

Box size:	14.5 x 14.5 x 17 cm	17.5 x 17.5 x 17 cm	17.5 x 17.5 x 21 cm
Carton size:	60 x 45.5 x 54 cm	72 x 36.5 x 54 cm	60 x 53 x 39 cm
Pieces per carton:	36 pcs	24 pcs	36 pcs
Each carton :	0.073 m ³	0.106 m ³	0.125 m ³

KETAI


CFL D.L



M02

MH1089

MH1089
Φ215 mm



TECHNICAL DATA

Item No.:	MH1089
Input:	230V AC 50Hz
Lamp Type :	G24d-3 TC-D Max 2x26W
Cutout diameter:	Φ 215mm
IP rating:	IP65
Main Material:	Aluminium
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze
Adjustable direction:	Fixed
Installation Accessories:	Bracket
Wiring:	W/Flexible Wire W/Striped End
Optics:	Aluminium vacuum metalized Reflector

PACKING

Box size:	2 4.5 x 14 x 29 cm
Carton size:	44 x 26 x 60.5 cm
Pieces per carton:	6 pcs
Each carton :	0.069 m ³

CFL D.L




M03

MH1050

G24D3

TC-D

Max. 2x26W



MH1050DG

TECHNICAL DATA




Item No.:	MH1050
Input:	230V AC 50Hz
Lamp Type :	G24d-3 TC-D Max 2x26W
Cutout diameter:	Ø 205mm
IP rating:	IP20
Main Material:	Aluminium
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze
Adjustable direction:	Fixed
Installation Accessories:	Bracket
Wiring:	W/Terminal Block
Optics:	Aluminium vacuum metalized Reflector

PACKING

Box size:	24 x 16 x 27.5 cm
Carton size:	50 x 29 x 51 cm
Pieces per carton:	8 pcs
Each carton :	0.074 m ³

KETAI

CFL D.L

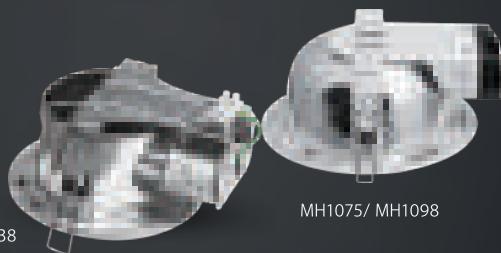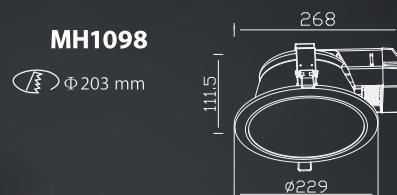

MH1038

MH1075 / MH1098

TECHNICAL DATA

Item No.:	MH1098 / MH1075	MH1038
Socket:	G24D3	G24D2 / E27
Lamp Type :	G24d-3 TC-D Max 2x26W	TC-D Max 2x18W / TC-TSE Max 2x18W
Input:	230V AC 50Hz	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze	
Adjustable direction:	Fixed	
Installation Accessories:	Double Action spring	
Wiring:	W/Terminal Block	
Optics:	Aluminium vacuum metallized Reflector + 3mm dotted glass	Aluminium vacuum metallized Reflector + 3mm tempered center-frosted glass

PACKING


Box size:	28 x 28 x 13.5 cm	19 x 18 x 11 cm
Carton size:	57.5 x 29.5 x 57 cm	56 x 39.5 x 47 cm
Pieces per carton:	8 pcs	12 pcs
Each carton :	0.097 m ³	0.104 m ³

M04

CFL D.L



MH1063
Φ 210 mm



MH1064
Φ 183 mm



MH1065
Φ 152 mm



TECHNICAL DATA

Item No.:	MH1065			MH1064			MH1063		
Scoket:	G24D1		E27	G24D2		E27	G24d3		E27
Lamp Type :	TC-D Max 2x13W		TC-TSE Max 2x13W	TC-D Max 2x18W		TC-DSE Max 2x15W	TC-D Max 2x26W		TC-TSE Max 2x23W
Input:				230V AC 50Hz					
IP rating:		IP20							
Main Material:		Aluminium							
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze								
Adjustable direction:	Fixed								
Installation Accessories:	Bracket								
Wiring:	Terminal block								
Optics:	Aluminium vacuum metalized Reflector + 3 mm tempered frosted glass								

PACKING



Item No.:	MH1063	MH1064	MH1065
Box size:	23.5 x 12 x 23.5 cm	20.5 x 12 x 20.5 cm	17 x 14.5 x 19.5 cm
Carton size:	50 x 25 x 73 cm	50 x 22 x 64.5 cm	53 x 21 x 61 cm
Pieces per carton:	12 pcs	12 pcs	12 pcs
Each carton :	0.092 m ³	0.071 m ³	0.068 m ³

KETAI


CFL D.L




MH1040
Φ 255 mm



MH1041
255x255 mm



MH1035
Φ 210 mm



TECHNICAL DATA

Item No.:	MH1035	MH1040/MH1041
Socket:	E27	G24D3
Lamp Type :	TC-TSE Max 2x23W TC-D Max 2x26W	G24q4
Input:		230V AC 50Hz
IP rating:		IP20
Main Material:		Aluminium
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze	
Adjustable direction:	Fixed	
Installation Accessories:	Double Action spring	Bracket
Wiring:		Terminal block
Optics:		Aluminium vacuum metalized Reflector + 3 mm tempered frosted glass

PACKING

Item No.:	MH1035	MH1040/MH1041
Box size:	24 x 24 x 12 cm	27.5 x 27.5 x 14 cm
Carton size:	74 x 25 x 51 cm	65 x 32.5 x 50 cm
Pieces per carton:	12 pcs	6 pcs
Each carton :	0.094 m ³	0.074 m ³

CFL D.L




MH1057

Ø 200 mm



MH1055

Ø 110 mm



MH1051

Ø 145 mm



TECHNICAL DATA

Item No.:	MH1051		MH1055		MH1057	
Socket:	G24D1	E27	G24D2	E27	G24q4	E27
Lamp Type :	TC-D Max 2x13W	TC-TSE Max 2x13W	TC-D Max 2x18W	TC-DSE Max 2x15W	TC-D Max 2x26W	TC-TSE Max 2x23W
Input:			230V AC 50Hz			
IP rating:			IP20			
Main Material:			Aluminium			
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze					
Adjustable direction:	Fixed					
Installation Accessories:	Bracket					
Wiring:	Terminal block					
Optics:	Aluminium vacuum metalized Reflector					



3mm tempered clear glass | 3mm tempered center-frosted glass | 3 mm tempered frosted glass

PACKING

Box size:	20 x 9 x 22 cm	16.5 x 9.8 x 16.5 cm	17 x 14.5 x 19.5 cm
Carton size:	56 x 23.5 x 42.5 cm	41.5 x 18.5 x 52.5 cm	53 x 21 x 61 cm
Pieces per carton:	12 pcs	12 pcs	12 pcs
Each carton :	0.056 m ³	0.039 m ³	0.068 m ³

KETAI

CFL D.L

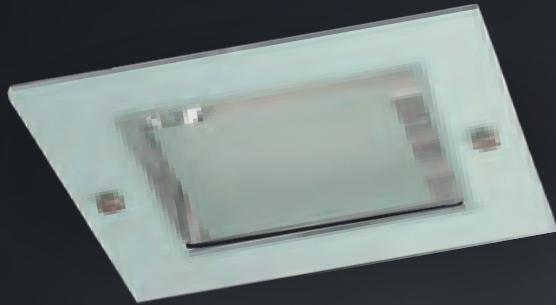


MH1053

195x195 mm



MH1052

160x160 mm



TECHNICAL DATA


Item No.:	MH1052	MH1053
Scoket:	G24D1	E27
Lamp Type :	TC-D Max 2x18W TC-TSE Max 2x18W	TC-D Max 2x26W TC-TSE Max 2x23W
Input:	230V AC 50Hz	IP20
IP rating:		
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze	
Adjustable direction:	Fixed	
Installation Accessories:	Double Action spring	
Wiring:	Terminal block	
Optics:	Aluminium vacuum metallized Reflector + 3mm tempered side & center-frosted glass	

PACKING


Box size:	20.5 x 11 x 21.5 cm	23.5 x 10.5 x 24.5 cm
Carton size:	44.5 x 43 x 36 cm	50.5 x 48.5 x 34.5 cm
Pieces per carton:	12 pcs	12 pcs
Each carton :	0.069 m ³	0.085 m ³

M08

CFL D.L

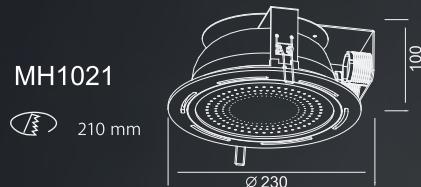

MH1021D
210 mm



TECHNICAL DATA



Item No.:	MH1021/MH1021D	MH1022D
Scoket:	G24D3	E27
Lamp Type :	TC-D Max 2x16W	TC-TSE Max 2x25W
Input:	230V AC 50Hz	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin nickel/Gold/Antique brass/Bronze	
Adjustable direction:	Fixed	
Installation Accessories:	Double Action spring	
Wiring:	Terminal block	
Optics:	Aluminium vacuum metalized Reflector +3mm tempered dotted glass	

PACKING

Box size:	24 x 24 x 12 cm
Carton size:	74 x 25 x 51 cm
Pieces per carton:	12 pcs
Each carton :	0.094 m ³



MH182
Φ200 mm



MH181
Φ146 mm



TECHNICAL DATA

Item No.:	MH182	MH181
Input:	230V AC 50Hz	
Lamp Type :	Rx7s HIT-DE Max 150W	Rx7s HIT-DE Max 70W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin Nickel/Gold/Antique brass/Bronze/Grey	
Adjustable direction:	Fixed	
Installation Accessories:	Double Action Spring	
Wiring:	W/Connection box	
Optics:	Aluminium Matt Flood Reflector 3mm tempered dotted glass	

PACKING


Box size:	23.5 x 11.7 x 23.5 cm	16.5 x 9.8 x 16.5 cm
Carton size:	49 x 25 x 73.5 cm	35 x 32 x 35 cm
Pieces per carton:	12 pcs	12 pcs
Each carton :	0.09 m ³	0.039 m ³

METAL HALIDE FIXTURES




MH171

205x205 mm



MH175

172x172 mm




N02

TECHNICAL DATA

Item No.:	MH171	MH175
Input:	230V AC 50Hz	
Lamp Type :	Rx7s HIT-DE Max 150W	Rx7s HIT-DE Max 70W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin Nickel/Gold/Antique brass/Bronze/Grey	
Adjustable direction:	Fixed	
Installation Accessories:	Double Action Spring	
Wiring:	W/Connection box	
Optics:	Aluminium Matt Flood Reflector 3mm tempered dotted glass	

PACKING

Box size:	25 x 25 x 12.5 cm	20 x 20 x 13 cm
Carton size:	51.5 x 26.5 x 40.5 cm	42 x 42 x 42 cm
Pieces per carton:	6 pcs	12 pcs
Each carton :	0.055 m ³	0.074 m ³

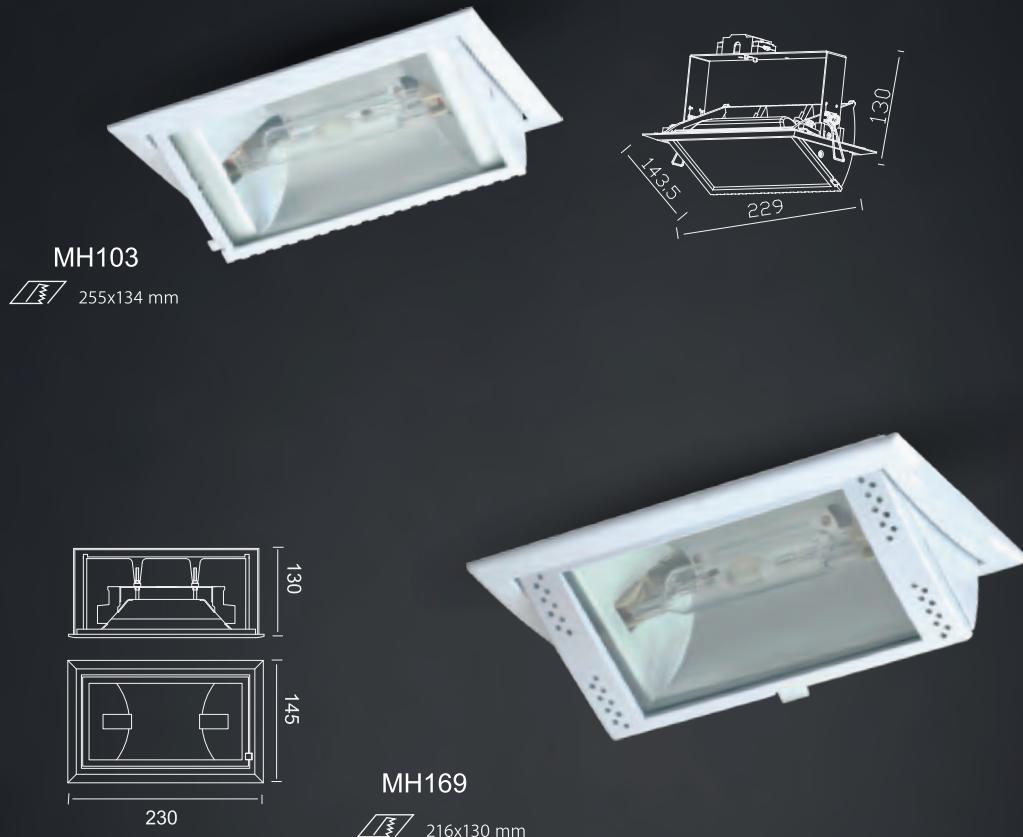

N03

TECHNICAL DATA

Item No.:	MH169	MH103
Input:	230V AC 50Hz	
Lamp Type :	Rx7s	
	HIT-DE Max 70W / 150W	
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin Nickel	
Adjustable direction:	Tilable	
Installation Accessories:	Double Action Spring	
Wiring:	W/Connection box	
Optics:	Aluminium Matt Flood Reflector 3mm tempered dotted glass	

PACKING

Box size:	25.5 x 15.5 x 14.5 cm
Carton size:	64 x 26 x 46.5 cm
Pieces per carton:	12 pcs
Each carton :	0.077 m ³

METAL HALIDE FIXTURES



MH167
Ø220 mm



N04

TECHNICAL DATA

Item No.:	MH167	MH170
Input:	230V AC 50Hz	
Lamp Type :	Rx7s HIT-DE Max 70W/150W	G12 HIT-CE Max 70W
IP rating:	IP20	
Main Material:	Aluminium	
Surface Finish:	White/Chrome/Satin Nickel/Gold/Antique brass/Bronze/Grey	
Adjustable direction:	Fixed	
Installation Accessories:	Double Action Spring	
Wiring:	W/Connection box	
Optics:	Aluminium Matt Flood Reflector	
	3mm tempered clear glass	3mm tempered dotted glass


PACKING

Box size:	25 x 25 x 22 cm	19 x 19 x 19 cm
Carton size:	52 x 26.5 x 47 cm	59 x 20.5 x 40.5 cm
Pieces per carton:	4 pcs	12 pcs
Each carton :	0.065 m ³	0.049 m ³




MH194

Ø167 mm




MH206

Ø177 mm



MH164

Ø175 mm



TECHNICAL DATA

Item No.:

MH194

MH206

MH164

Input:

230V AC 50Hz

Lamp Type :

G12

G12 HIT-CE Max 70W

IP20

IP rating:

Aluminium

Main Material:

White/Chrome/Satin Nickel /Grey

Surface Finish:

Gimbal

Adjustable direction:

Double Action Spring

Installation Accessories:

W/Connection box

Wiring:

Aluminium Matt Flood Reflector

Optics:

3mm tempered sunflower glass

3mm clear glass

3mm tempered center-forster glass

PACKING

Box size:

19.3 x 19.3 x 14.5 cm

20.5 x 20.5 x 18 cm

20 x 20 x 18 cm

Carton size:

60 x 40 x 32 cm

42.5 x 42.5 x 57 cm

62 x 41 x 20 cm

Pieces per carton:

12 pcs

8 pcs

6 pcs

Each carton :

0.077 m³


0.103 m³

0.051 m³


METAL HALIDE FIXTURES



MH204-G12



MH204-CDMR111



MH204-G8.5



MH204-AR111



TECHNICAL DATA

Item No.:	MH204-G12	MH204-CDMR111	MH204-G8.5	MH204-AR111
Input:	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz	12V AC 50Hz
Lampholder type:	G12	Gx8.5	G8.5	G53
Lamp Type :	HIT-CE Max 150W	HIR111 Max 70W	HIT-TC Max 70W	AR111 Max 100W
Cutout :	Ø162 mm			
IP rating:	IP20			
Main Material:	Aluminium			
Surface Finish:	White/Chrome/Satin Nickel/Gold/Antique brass/Bronze/Grey			
Adjustable direction:				
Installation Accessories:	Cimbal Leaf Clip			
Wiring:	W/Connection box			
Optics:	Aluminium clear anodized Reflector + 3mm tempered center-frosted glass			

PACKING


Box size:	18 x 18 x 18.6 cm
Carton size:	37.5 x 37.5 x 40 cm
Pieces per carton:	8 pcs
Each carton :	0.056 m ³




WL102



WL328



WL328A



TECHNICAL DATA

Item No.:	WL102	WL328	WL328A
Input:		230V AC 50/60Hz	
Lamp Type:	GR10q 2D 28W	G24q-3 TC-DEL 2x26W	
Main Material:		Aluminium	
Surface Finish:		White, Grey, Black powder coating	
Adjustable:		Fixed	
Installation by:		Screws	
Wiring:		Terminal Block	
Optics:	Frosted acrylic diffuser	Frosted glass or White Acrylic	2mm Frosted glass


PACKING

Box size:	34.5 x 12.5 x 34.5 cm	32 x 8 x 32 cm	34.5 x 9 x 34.5 cm
Carton size:	73.5 x 37.5 x 53.5 cm	33 x 33.5 x 51 cm	36 x 38 x 37 cm
Pcs per carton:	30 pcs	6 pcs	4 pcs
Each carton :	0,147 m ³	0,057 m ³	0,051 m ³
MOQ	500 pcs	500 pcs	500 pcs

Wall Light



KT6224A



TECHNICAL DATA

Item No.:	KT6224A
Input:	12V AC 50Hz
Lamp Type:	GY6.35 QT12 Max 50W
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable:	Fixed
Installation by:	Leaf Clip
Wiring:	Terminal Block
Optics:	Aluminium sheet

PACKING

Box size:	7.3 x 7.3 x 11.5 cm
Carton size:	38.5 x 33.5 x 36 cm
Pcs per carton:	50 pcs
Each carton :	0,092 m ³
MOQ	50 pcs



P03

TECHNICAL DATA

Item No.:	WL321	WL321D
Input:	12V AC 50Hz	
Lamp Type:	GY6.35 QT12 Max	
	50W	2x50W
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey UV Powder Coating	
Adjustable:	Fixed	
Installation by:	Screws	
Wiring:	Recommend to connect w/ heat-shrink water-tight connector (not included)	
Optics:	3mm Clear glass	


PACKING

Box size:	9.5 x 7 x 9.5 cm	15.5 x 9.5 x 10.5 cm
Carton size:	44.5 x 20.5 x 22.5 cm	32.5 x 30.5 x 23.5 cm
Pcs per carton:	24 pcs	10 pcs
Each carton :	0,02 m ³	0,023 m ³
MOQ	500 pcs	500 pcs


Wall Light



WL322



WL322D



TECHNICAL DATA

Item No.:	WL322	WL322D	WL322-G9	WL322D-G9
Input:	12V AC 50Hz		230V AC 50Hz	
Lamp Type:	GY6.35 QT12 Max		G9 QT14	
	50W	2x50W	40W	2x40W
Main Material:		Aluminium		
Surface Finish:		White/Black/Grey UV Powder Coating		
Adjustable :		Fixed		
Installation by:		Screws		
Wiring:	Recommend to connect w/ heat-shrink water-tight connector (not included)			
Optics:	3mm Clear glass			


PACKING

Box size:	12.5 x 9 x 10.5 cm	21 x 10.5 x 13.5 cm
Carton size:	59.5 x 26.5 x 23.5 cm	43.5 x 33.5 x 29.5 cm
Pcs per carton:	24 pcs	12 pcs
Each carton :	0,037 m ³	0,043 m ³
MOQ	500 pcs	500 pcs


Wall Light



WL323



WL323D



TECHNICAL DATA

Item No.:	WL323	WL323D
Input:	12V AC 50Hz	
Lamp Type:	GY6.35 QT12 Max	
	50W	2x50W
Main Material:	Aluminium	
Surface Finish:	White/Black/Grey UV Powder Coating	
Adjustable :	Fixed	
Installation by:	Screws	
Wiring:	Recommend to connect w/ heat-shrink water-tight connector (not included)	
Optics:	3mm Clear glass	

PACKING

Box size:	12.5 x 11.5 x 15.8 cm	21 x 10.5 x 13.5 cm
Carton size:	49.5 x 39.5 x 34.1 cm	43.5 x 33.5 x 29.5 cm
Pcs per carton:	24 pcs	12 pcs
Each carton :	0,067 m ³	0,043 m ³
MOQ	500 pcs	500 pcs

Wall Light



TECHNICAL DATA

Item No.:	WL324	WL327	WL329
Input:		230V AC 50Hz	
Lamp Type:	E27 TC-TSE 15W	GU10 QPAR51 2x50W	GU10 QPAR51 50W
Main Material:		Aluminium	
Surface Finish:		White/Black/Grey UV Powder Coating	
Adjustable:		Fixed	
Installation by:		Screws	
Wiring:	Recommend to connect w/ heat-shrink water-tight connector (not included)		
Optics:	2mm Clear glass	3mm Clear glass	3mm Clear glass

PACKING

Box size:	12.5 x 9.5 x 21 cm	9.5 x 7 x 15.5 cm	8.6 x 7 x 9.3 cm
Carton size:	24 x 40 x 44 cm	30.5 x 30 x 33 cm	44 x 18.5 x 31 cm
Pcs per carton:	24 pcs	24 pcs	36 pcs
Each carton :	0,07 m ³	0,032 m ³	0,025 m ³
MOQ	500 pcs	500 pcs	500 pcs



TECHNICAL DATA

Item No.:	WL401	WL404	WL407
Input:		230V AC 50Hz	
Lamp Type:	G9 QT14	2x25W	2x25W
Main Material:	Steel		
Surface Finish:	Chrome		
Adjustable :	Fixed		
Installation by:	Screws		
Wiring:	Terminal Block		
Optics:	Rested quartz glass		


PACKING

Box size:	8 x 8 x 13.5 cm	10 x 10 x 13.5 cm	13 x 8.5 x 18 cm
Carton size:	42.5 x 42.5 x 29.5 cm	52.5 x 52.5 x 29.5 cm	56 x 28.5 x 40 cm
Pcs per carton:	50 pcs	50 pcs	24 pcs
Each carton :	0,053 m ³	0,081 m ³	0,064 m ³
MOQ	500 pcs	500 pcs	500 pcs


Wall Light



WL410



WL399



TECHNICAL DATA


Item No.:	WL410	WL399
Input:	230V AC 50Hz	
Lamp Type:	GU10 2x50W	R7s J118 200W
Main Material:	Aluminium	
Surface Finish:	White, Grey, Black powder coating	
Adjustable:	Fixed	
Installation by:	Screws	
Wiring:	Terminal Block	Recommend to connect
Optics:	Rested quartz glass	3mm Clear glass

PACKING

Box size:	9.5 x 9.5 x 22.5 cm	33.5 x 75 x 19.5 cm
Carton size:	49.5 x 24.5 x 41 cm	40.5 x 35 x 40.5 cm
Pcs per carton:	20 pcs	10 pcs
Each carton :	0,053 m ³	0,043 m ³
MOQ	500 pcs	500 pcs


MHT1-100/200/300

Aluminium alloy 4 wire track




MHT1-C/L or MHT1-C/R

Power adaptor




MHT1-I

Small straight connector




MHT1-IL

Big straight connector




MHT1-A

Adjustable connector




MHT1-L/L or MHT1-L/R

L connector




MHT1-T/L or MHT1-T/R

T connector





MHT1-X

X connector




MHT1-N

End cap




MHT1-H1

Fixture adaptor




MHT-H3

Fixture adaptor




A70

Fixture adaptor




MHT-H12

Fixture adaptor




MHT-H6 Box

Fixture adaptor



MHT-H11 Box

Fixture adaptor



Pendant Light Accessories

MHT1-P15/30/50
(1.5M/3M/5M)



MHT1-P2



MHT1-P1



R02

KETAI

Driver

Model	Input Voltage	Power factor	Max output power	Output Voltage	Output Current	Eff	Certification	IP	Ta	Tc Max	Wiring	Dim	Type	
	KT-LD0301-MS	100–240	0.6	4w	6–10v	300mA	0.75	–	IP20	−10 ~50°C	80°C	Loose wire	31.5*30*21	AD-DC Constant Current
	KEP0301-350B1	100–240	0.65	5w	3–10.5V	320mA	0.75	–	IP20	−10 ~50°C	85°C	Screw Terminal	55*40*20	
	KEP0203-700B1	100–240	0.65	6w	3–7V	650mA	0.75	–	IP20	−10 ~50°C	85°C	Screw Terminal	55*40*20	AD-DC Constant Current
	KEP-LD05W-A1	100–240	0.65	7.5w	3–18V	320mA	0.75	UL	IP20	−10 ~50°C	85°C	Screw Terminal	55*40*20	
	KEP0301-350A1	100–240	0.65	5w	3–10.5V	320mA	0.75	CE	IP20	−10 ~50°C	85°C	Loose wire	47*29*25	
	KEP0401-350A1	100–240	0.65	6w	3–15V	320mA	0.75	–	IP20	−10 ~50°C	85°C	Loose wire	47*29*25	AD-DC Constant Current
	KEP0203-700A1	100–240	0.65	6w	3–7V	650mA	0.75	CE	IP20	−10 ~50°C	85°C	Loose wire	47*29*25	
	KEP0601-350A1	100–240	0.8	8w	9–21V	320mA	0.75	–	IP20	−10 ~50°C	85°C	Loose wire	72*36*23	
	KEP0303-700A1	100–240	0.8	9w	3–11V	650mA	0.75	–	IP20	−10 ~50°C	85°C	Loose wire	72*36*23	AD-DC Constant Current
	KEP-LD09W-B1	100–240	0.85	12w	18–31V	320mA	0.75	UL	IP20	−10 ~50°C	85°C	Loose wire	72*36*23	
	KEP0901-350A1	100–240	0.85	12w	12–31V	320mA	0.75	CE	IP20	−10 ~50°C	85°C	Screw Terminal	92*38*25	
	KEP0403-700A1	100–240	0.85	10w	3–11V	650mA	0.75	CE	IP20	−10 ~50°C	85°C	Screw Terminal	92*38*25	AD-DC Constant Current
	KEP0601-350B1	100–240	0.8	8w	9–21V	320mA	0.75	CE	IP20	−10 ~50°C	85°C	Loose wire	Ø50*22	
	KEP0303-700B1	100–240	0.8	9w	3–11V	650mA	0.75	CE	IP20	−10 ~50°C	85°C	Loose wire	Ø50*22	AD-DC Constant Current
	KEP0901-350B1	100–240	0.85	12w	12–31V	320mA	0.75	CE	IP20	−10 ~50°C	85°C	Screw Terminal	132*38*25	
	KEP0301-8517	100–240	0.85	4w	3–10V	320mA	0.75	CE	IP20	−10 ~50°C	85°C	Screw Terminal	132*38*25	AD-DC Constant Current
	KEP1001-350A1	100–240	0.85	13w	18–35V	320mA	0.78	CE	IP20	−10 ~50°C	85°C	Screw Terminal	122*38*25	
	KEP1501-350A1	100–240	0.85	18.5w	30–53V	320mA	0.8	CE	IP20	−10 ~50°C	85°C	Screw Terminal	122*38*25	
	KEP0603-700A1	100–240	0.85	18w	9–21V	650mA	0.8	CE	IP20	−10 ~50°C	85°C	Screw Terminal	122*38*25	AD-DC Constant Current
	KEP-LD18W-C1	100–240	0.85	20w	30–56V	320mA	0.8	UL	IP20	−10 ~50°C	85°C	Screw Terminal	122*38*25	
	KEP0902-500A1	100–240	0.85	18w	18–31V	500mA	0.8	CE	IP20	−10 ~50°C	85°C	Screw Terminal	122*38*25	
	KEP1001-350B1	100–240	0.85	13w	18–35V	320mA	0.75	–	IP20	−10 ~50°C	85°C	Loose wire	Ø75*30	
	KEP1501-350B1	100–240	0.85	18.5w	30–53V	320mA	0.8	–	IP20	−10 ~50°C	85°C	Loose wire	Ø75*30	AD-DC Constant Current

R03

Model	Input Voltage	Power factor	Max output power	Output Voltage	Output Current	Eff	Certification	IP	Ta	Tc Max	Wiring	Dim	Type
KEP0603-700B1	100~240	0.85	18w	9~21V	650mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	Ø75*30	
KEP-LD18W-D1	100~240	0.85	20w	30~56V	320mA	0.8	UL	IP20	-10 ~50°C	85°C	Loose wire	Ø75*30	
	100~240	0.85	18w	18~31V	500mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	Ø75*30	AD-DC Constant Current
AK30W-350-D9	100~240	0.95	30w	45~76V	320mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	122*38*25	
AK30W-400-D9	100~240	0.95	30w	24~53V	400mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	122*38*25	
AK30W-500-D9	100~240	0.95	30w	24~50V	500mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	122*38*25	
AK30W-700-D6	100~240	0.95	30w	18~36V	650mA	0.8	-	IP20	-10 ~50°C	85°C	Loose wire	122*38*25	
	100~240	0.95	36w	25~43V	650mA	0.8	CE, CB, SAA	IP20	-10 ~50°C	85°C	Screw Terminal	145*48*31	
	100~240	0.95	40w	25~43V	1000mA	0.8	CE, CB, SAA	IP20	-10 ~50°C	85°C	Screw Terminal	145*48*31	AD-DC Constant Current
KEP50W-4312A1	100~240	0.95	50w	25~35V	1200mA	0.8	CE, CB, SAA	IP20	-10 ~50°C	85°C	Screw Terminal	145*48*31	
	100~240	0.85	20w	30~56V	320mA	0.8	UL	IP65	-10 ~50°C	85°C	Loose wire	128*43*32	AD-DC Constant Current
	100~240	0.95	30w	25~43V	1000mA	0.8	-	IP65	-10 ~50°C	85°C	Loose wire	147*49*42	AD-DC Constant Current
KEP50W-4315A2	100~240	0.95	50w	25~35V	1200mA	0.8	-	IP65	-10 ~50°C	85°C	Loose wire	147*49*42	
	200~240	0.6	22w	30~53V	320mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	AD-DC Constant Current Dimmable
KEP-DIM10W-36350-D6	200~240	0.6	12w	18~35V	320mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
TRIAC	KEP-DIM20W-60350-D6	200~240	0.6	20w	18~35V	500mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25
	100~240	0.6	12w	18~35V	330mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	92*38*25	AD-DC Constant Current
AK-10W-24500-D5	100~240	0.6	13w	15~24V	500mA	0.83	CE	IP20	-10 ~50°C	85°C	Screw Terminal	92*38*25	
AK-16W-60330-D6	100~240	0.6	20w	30~53V	330mA	0.83	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
	100~240	0.95	30w	45~76V	320mA	0.8	CE	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	AD-DC Constant Current
AKP30W-400-D6	100~240	0.95	30w	24~53V	400mA	0.8	-	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
AK30W-500-D6	100~240	0.95	30w	24~50V	500mA	0.8	-	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
KEP30W-700-D6	100~240	0.95	30w	18~36V	650mA	0.8	-	IP20	-10 ~50°C	85°C	Screw Terminal	122*38*25	
	100~240	0.95	50w	25~35V	LED: 1800mA FAN:12V/ 100MA	0.8	-	IP20	-10 ~50°C	85°C	Screw Terminal	124*80*33	AD-DC Constant Current with 12V fan output

KETAI

