

A close-up photograph of a dark, reflective surface covered in numerous water droplets of various sizes. The droplets are scattered across the frame, with a prominent vertical streak of larger, more irregular droplets running down the right side. The background is a dark, blurred gradient, possibly of a window or glass pane, with some light reflecting off the surface.

**IP65
WATERPROOF
DOWNLIGHT**



IP65 outdoors downlights- in fixed design with surface coating that can withstand outdoor climate.

Two powers of downlights for outdoors suitable for public as well as private environment, such as entrances, eaves, carport, homes, offices, restaurants, supermarkets, shops, shopping centres, museums, bathrooms, etand also in sloping

Outdoor lighting creates a welcoming impression and increases security around the property.

RECESSED DOWNLIGHT



Deep anti glare with perfect light spots and without any shadows.

RECESSED DOWNLIGHT



High-quality aluminum housing ensures excellent heat dissipation and longer guarantee, and they will have a higher resistance to steam.



Quickinfo

KT7253 @ 3000K, ≥ 80
14W, 45°, 902LM

Order options

Color temperature

2700K

3000K

4000K

Color rendering index

≥ 80

≥ 90

LENS beam angle

KT7253-15°, 24°, 36°, 45°


Control

Non dim

DALI

0~10V

Triac

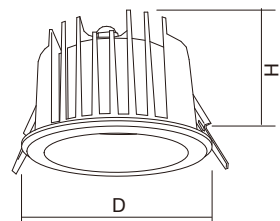

RECESSED DOWNLIGHT



Light distribution

3000K CRI \geq 80

KT7253 Medium 44°

h (m)	E0° (lx)	Φ (m)
1	1452	0.81
2	362.9	1.62
3	90.7	3.25
4	58.1	4.06
5	40.3	4.87

Recessed downlight

IP65 waterproof downlight

Protection class IP65

3 years availability guarantee

Two powers of downlights for outdoors suitable for public as well as private environment, such as entrances, eaves, carport, homes, offices, restaurants, supermarkets, shops, shopping centres, museums, bathrooms, etand also in sloping constructions.


The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires.

LED  220-240V IP65 Bridgelux OSRAM

	W	LUM	CCT	BEAM	CRI	CUTOUT	D	H
KT7253	14	902	3000K	45°	80	Φ 75	Φ 84	65

Front Ring Finish color

For KT7253

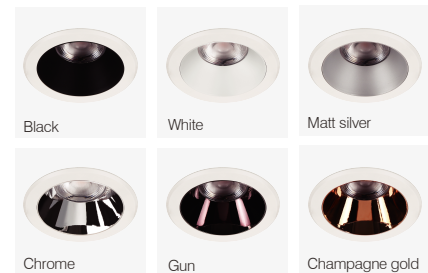

Finish color

For KT7253

