

# TWIN SERIES



# Twins Series - Recessed Downlight



KT6564

### Light distribution

3000K CRI 90

KT6564		30°
h (m)	E0° (lx)	Φ (m)
1	1076	0.54
2	268.9	1.08
3	119.5	1.61
4	67.2	2.15
5	43.0	2.69



KT6564A

### Light distribution

3000K CRI 90

KT6564A		80°
h (m)	E0° (lx)	Φ (m)
1	390.8	1.64
2	97.7	3.28
3	43.4	4.92
4	24.4	6.56
5	15.6	8.20



KT6565

### Light distribution

3000K CRI 90

KT6565		30°
h (m)	E0° (lx)	Φ (m)
1	1628	0.51
2	407.0	1.03
3	180.9	1.54
4	101.7	2.06
5	65.1	2.57



KT6565A

### Light distribution

3000K CRI 90

KT6565A		80°
h (m)	E0° (lx)	Φ (m)
1	401.9	1.61
2	100.5	3.22
3	44.7	4.83
4	25.1	6.45
5	16.1	8.06

### Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	CRI
KT6564	10W	700	3000K	30/60°	78×78	Bridgelux	Areek	90
KT6564A	12W	670	3000K	30/60°	78×78	Bridgelux	Areek	90
KT6565	10W	700	3000K	30/60°	Φ78	Bridgelux	Areek	90
KT6565A	12W	670	3000K	30/60°	Φ78	Bridgelux	Areek	90


All values are measured at 220V(+/- 10%).  
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
 Colour Rendering Index (CRI) CRI80, CRI90  
 Die-casting Aluminum

### Frame Finishing color


■ Black RAL9005

■ Grey RAL9006


■ White RAL9016




KT6564



KT6564A



KT6565



KT6565A

Remark: ● Technical information may change, please refer to the datasheet.



# Twins Series - Recessed Downlight



## Control Type



## Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	CRI
KT6564B	8W	550	3000K	30/60°	78x78	Bridgelux	Areek	90
KT6565B	8W	550	3000K	30/60°	Ø78	Ever Core	KEGU	90

All values are measured at 220V(+/- 10%).  
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
 Colour Rendering Index (CRI) CRI80, CRI90  
 Die-casting Aluminum

## Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016



## Light distribution

3000K CRI 90


KT6564B		28°
h (m)	E0° (lx)	Φ (m)
1	1048	0.50
2	262.0	1.00
3	116.5	1.51
4	65.5	2.01
5	41.9	2.51



## Light distribution

3000K CRI 90

KT6565B		24°
h (m)	E0° (lx)	Φ (m)
1	2153	0.42
2	538.4	0.84
3	239.3	1.26
4	134.6	1.68
5	86.1	2.10

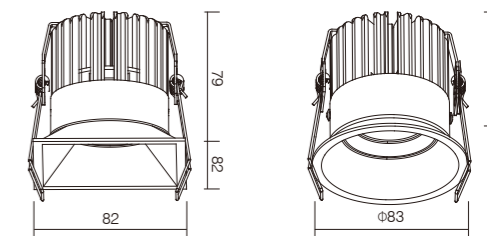

KT6564B

KT6565B

Remark: ● Technical information may change, please refer to the datasheet.