

RETROFIT SERIES



Retrofit Series - Recessed Downlight



Light distribution		
3000K CRI 90		
KT6594		36°
h (m)	E0° (lx)	Φ (m)
1	1181	0.65
2	295.2	1.29
3	131.2	1.94
4	73.8	2.58
5	47.2	3.23



Light distribution		
3000K CRI 90		
KT6594A		29°
h (m)	E0° (lx)	Φ (m)
1	1473	0.52
2	368.1	1.05
3	163.6	1.57
4	92.0	2.09
5	58.9	2.62



Light distribution		
3000K CRI 90		
KT6596		36°
h (m)	E0° (lx)	Φ (m)
1	1181	0.65
2	295.2	1.29
3	131.2	1.94
4	73.8	2.58
5	47.2	3.23



Light distribution		
3000K CRI 90		
KT6596A		29°
h (m)	E0° (lx)	Φ (m)
1	1473	0.52
2	368.1	1.05
3	163.6	1.57
4	92.0	2.09
5	58.9	2.62

Control Type




Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	CRI
KT6594	11W	810	3000K	30/60°	Φ76	Bridgelux	Lifud	90
KT6594A	11W	810	3000K	30/60°	Φ76	Bridgelux	Lifud	90
KT6596	11W	810	3000K	30/60°	Φ76	Bridgelux	Lifud	90
KT6596A	11W	810	3000K	30/60°	Φ76	Bridgelux	Lifud	90

All values are measured at 220V(+/- 10%).
Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
Colour Rendering Index (CRI) CRI80, CRI90
Die-casting Aluminum

Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016

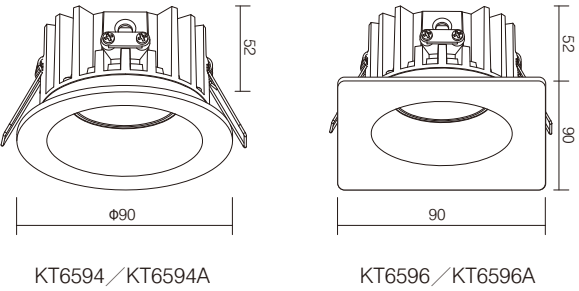

Remark:●Technical information may change, please refer to the datasheet.