


PIPE
SERIES



Pipe Series - Track Light

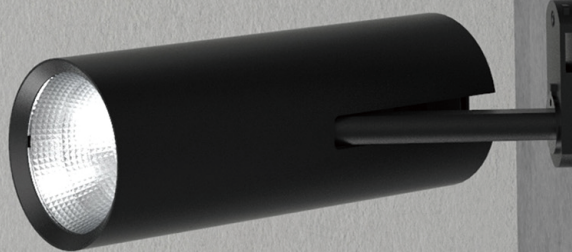

Light distribution

3000K CRI 90

MHT8596A		37°
h (m)	E0° (lx)	Φ (m)
1	2458	0.66
2	614.4	1.33
3	273.1	1.99
4	153.6	2.65
5	98.3	3.31



Light distribution

3000K CRI 90

MHT8596B		22°
h (m)	E0° (lx)	Φ (m)
1	11678	0.39
2	2919	0.77
3	1298	1.16
4	729.9	1.55
5	467.1	1.94



Light distribution

3000K CRI 90

MHT8597		26°
h (m)	E0° (lx)	Φ (m)
1	9838	0.46
2	2459	0.93
3	1093	1.39
4	614.8	1.86
5	393.5	2.32


Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
MHT8596A	20W	1435	3000K	15/24/38°	Bridgelux	TRIDONIC	90
MHT8596B	33W	2723	3000K	15/24/38°	Bridgelux	TRIDONIC	90
MHT8597	42W	3053	3000K	24/40/60°	LUMENS	AC	90

All values are measured at 220V(+/- 10%).
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
 Colour Rendering Index (CRI) CRI80, CRI90
 Die-casting Aluminum

Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016

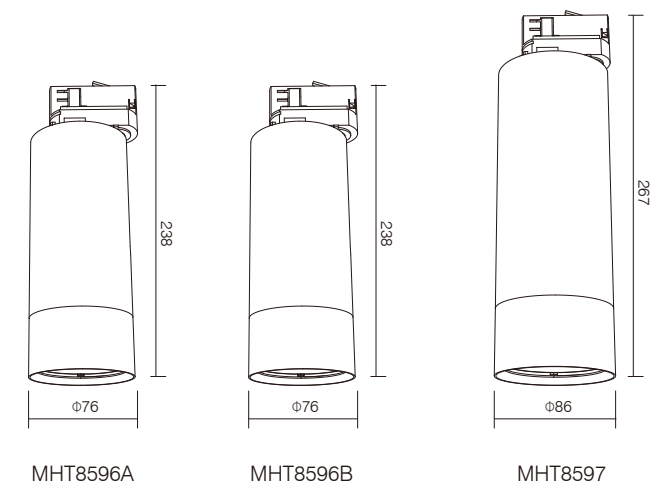

Remark: ● Technical information may change, please refer to the datasheet.