

KETAI[®]



TAURUS

TAURUS is made with ADC12 aluminium and in excellent heat-dissipation design, which mostly improves the lifespan of lamp. All aim at KETAI's promise of everlasting low carbon green economy. TAURUS can be installed with track or recessed in ceiling in terms of application.



Control Type

 On-off
  0-10V
  Phase-Cut
  DALI
  Casambi


Luminaire specifications

Mode	Power	Lumen	CCT	BA.	CUTOUT	Light Source	Driver	CRI
MHT8811	28W	2592	3000K	15/24/38/55°	/	Bridgelux	TRIDONIC	90
KT6986	28W	2475	3000K	15/24/38/55°	Φ 140	Bridgelux	OSRAM	90
KT6987	28W	2444	3000K	15/24/38/55°	Φ 150x150	Bridgelux	OSRAM	90
KT6988	28x2W	2x2444	3000K	15/24/38/55°	Φ 275x150	Bridgelux	OSRAM	90

All values are measured at 220V(+/- 10%).
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
 Colour Rendering Index (CRI) CRI80, CRI90
 Die-casting Aluminum


Finishing colour

- Black RAL9005
- Grey RAL9006
- White RAL9016

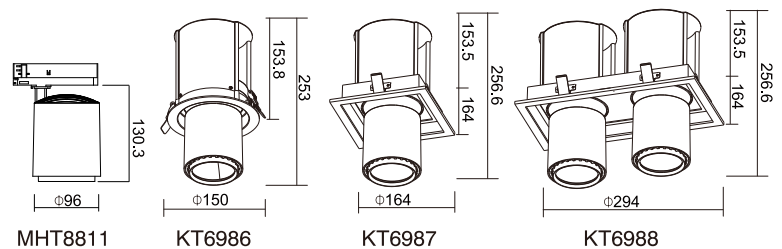


TAURUS


MHTA8811, 28W, 2592LUM

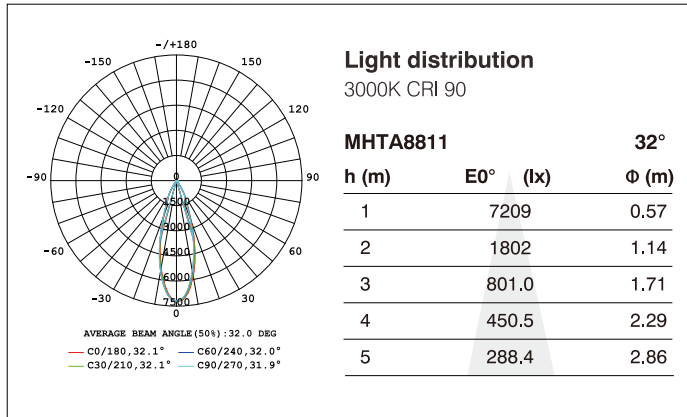


KT6986, 28W, 2475LUM

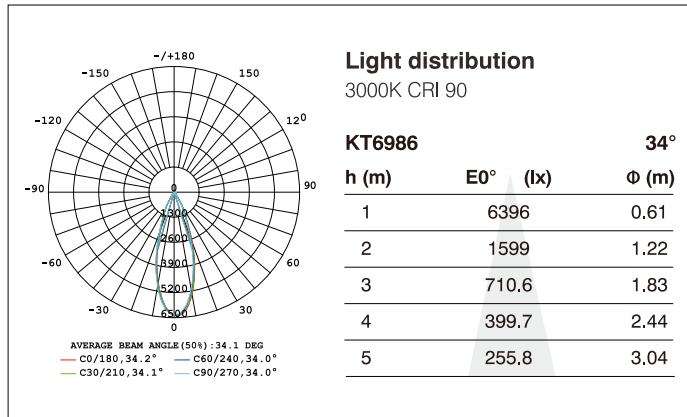


KT6587, 28W, 2444LUM

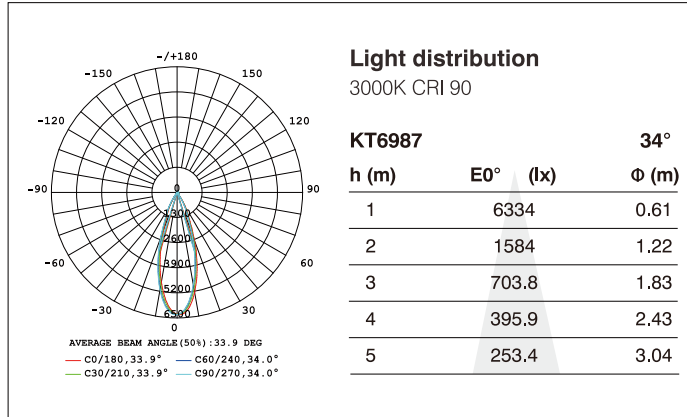

KT6588, 28x2W, 2444x2LUM

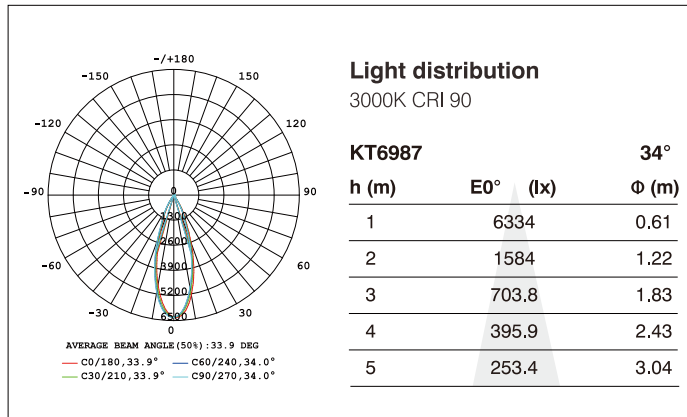

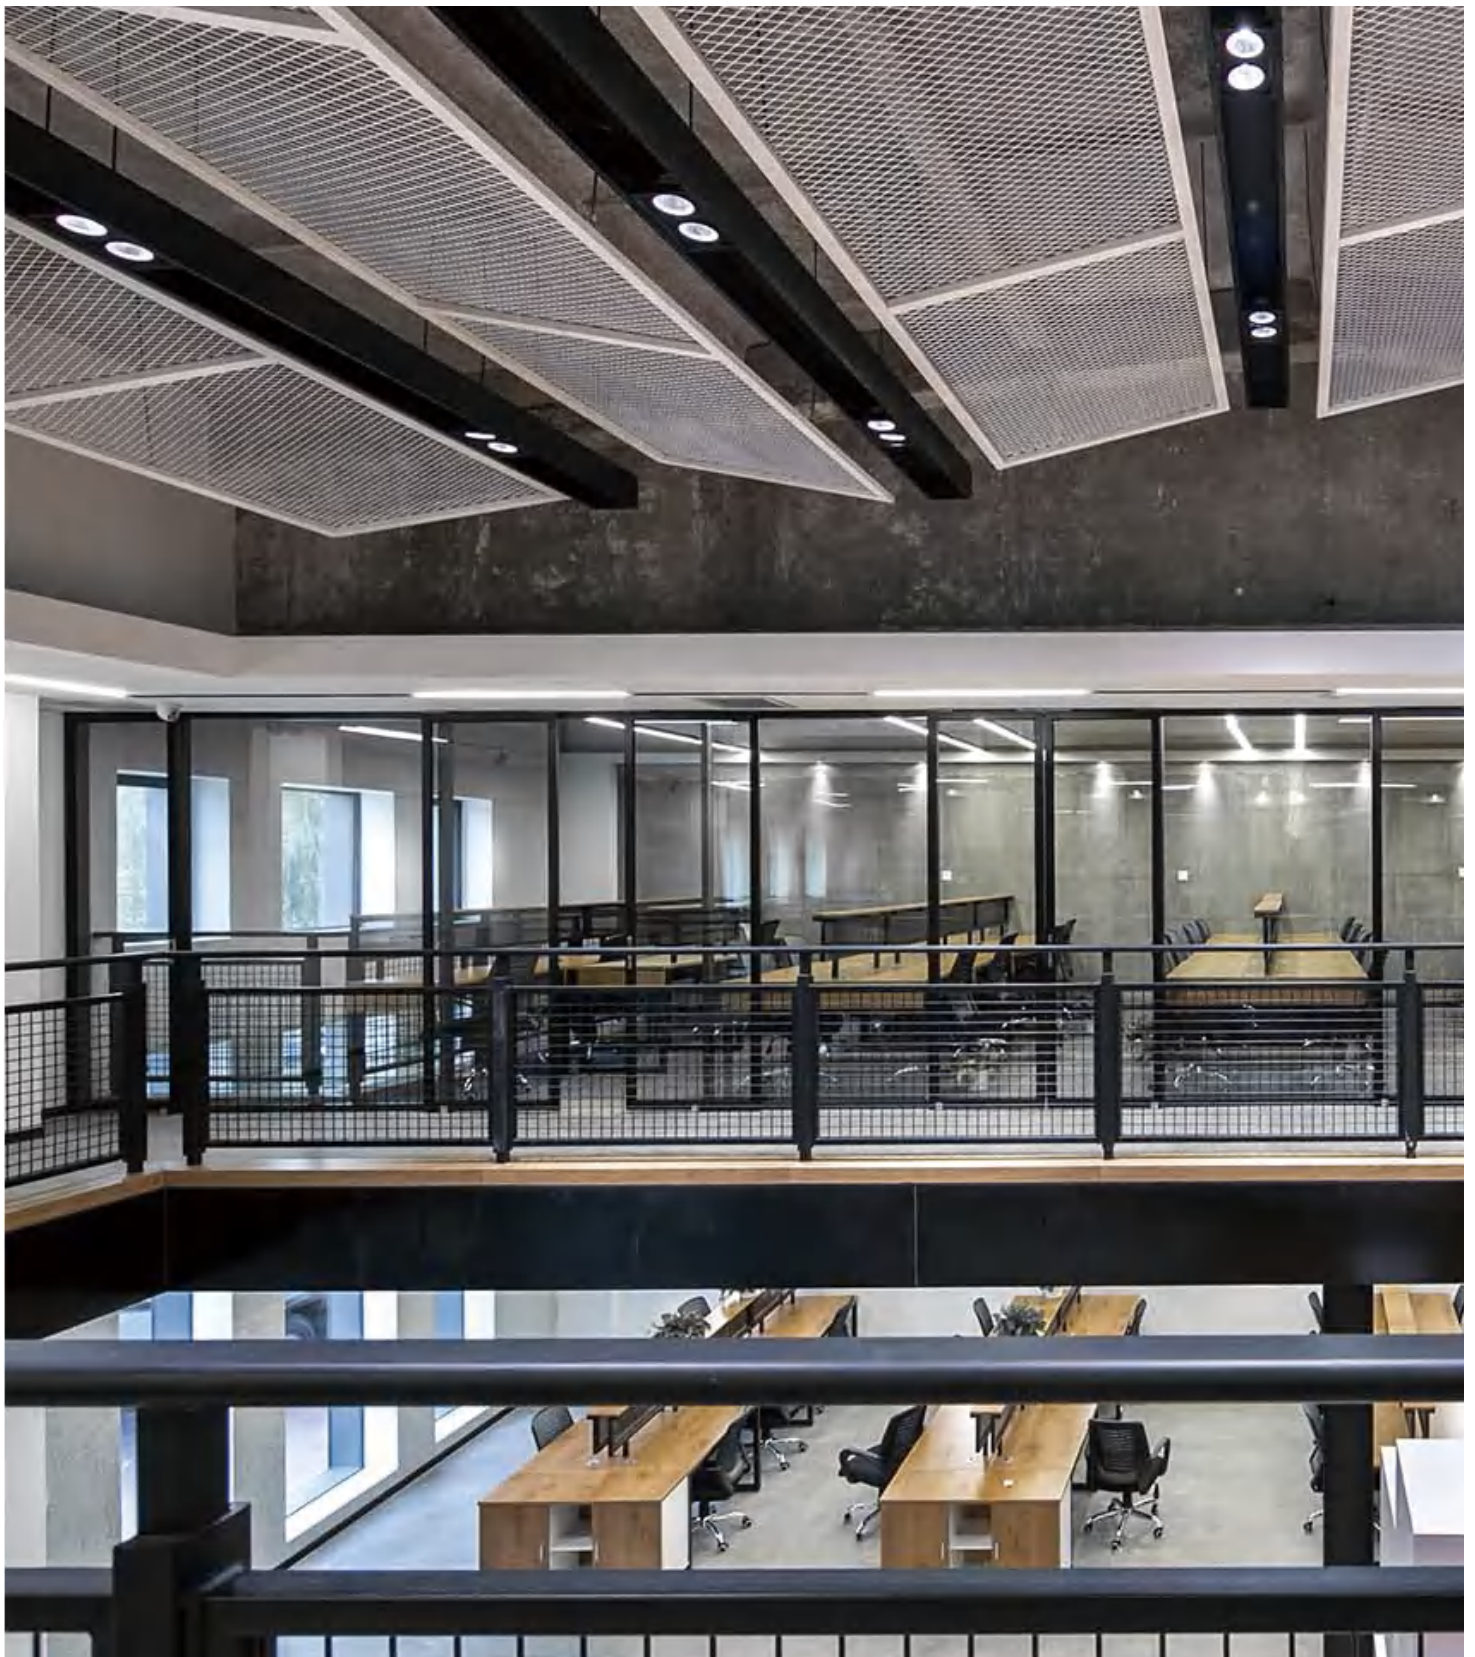

KETAI INDUSTRIES LIGHTING CO.,LTD.
Ketai Building, 4 Mashe New Street, Lishui, Nanhai,
Foshan Guangdong, China

T : +86 757 8560 7707
F : +86 757 8563 3675
E : sales@ketailighting.com

Join Us!

www.ketailighting.com

KETAI[®]