

KETAI[®]



ECO

Aluminum advantages:

- 1 High reflectivity, up to 95-98%, and 8-10% higher than conventional with spinning processing
- 2 Reducing environment pollution by using high quality of aluminium material so that there is no need for the secondary treatment on the surface.
- 3 Excellent resistance to high temperature to keep this reflector for long lifespan and good appearance without color change. 5 years for antioxidation and anti-fading.


Eco, was born for the retail lighting with high efficiency and nice finishing, especially after it is upgraded to G2 version with integrated driver, it aims for more competitive cost saving and sustainability.




ECO



MHT8968, 28W, 2671LUM

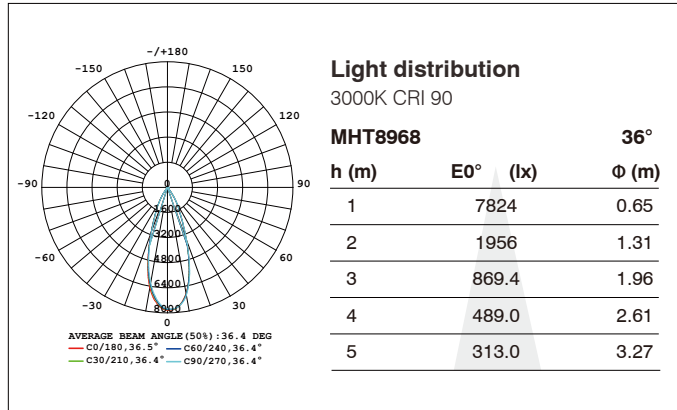

MHT8968-High, 28W, 3656LUM

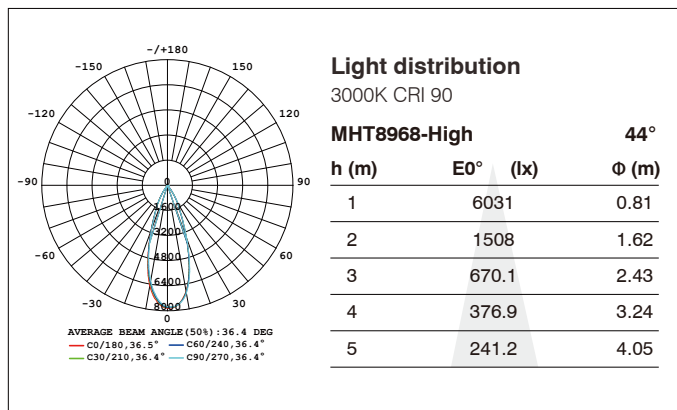

Control Type




Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
MHT8968	28W	2671	3000K	16/24/40/60°	Bridgelux	TRIDONIC	90
MHT8968(High)	28W	3656	3000K	15/24/30/45/60°	LUMINUS	TRIDONIC	90

All values are measured at 220V(+/- 10%).
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
 Colour Rendering Index (CRI) CRI80, CRI90
 Die-casting Aluminum

Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016





KETAI INDUSTRIES LIGHTING CO.,LTD.
Ketai Building, 4 Mashe New Street, Lishui, Nanhai,
Foshan Guangdong, China
T : +86 757 8560 7707
F : +86 757 8563 3675
E : sales@ketailighting.com

Join Us!

www.ketailighting.com

KETAI[®]