

KETAI[®]



Fabrice



Control Type

 On-off
  0-10V
  Phase-Cut
  DALI
  Casambi
  WIFI
  Bluetooth
  Zigbee


Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
MHT8837	15W	258-653	3000K	8-45°	Bridgelux	OSRAM	90
MHT8847	30W	970-1962	3000K	18-55°	Bridgelux	OSRAM	90
MHT8837A	15W	107-370	2700-6500K	17-41°	EVERCORE	KEGU	90
MHT8847A	30W	707-1889	2700-6500K	20-50°	EVERCORE	KEGU	90

All values are measured at 220V(+/- 10%).
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
 Colour Rendering Index (CRI) CRI80, CRI90
 Die-casting Aluminum


Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016

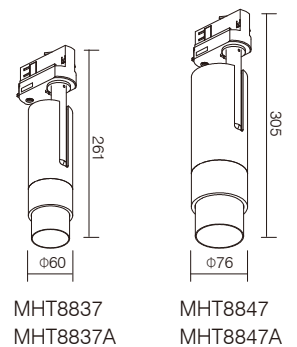



The lamp is compatible with intelligent control systems like DALI, WiFi, Bluetooth, Zigbee and other intelligent systems to control the lighting effect with preferable color temperature and brightness by 4 adjustment buttons on the display.

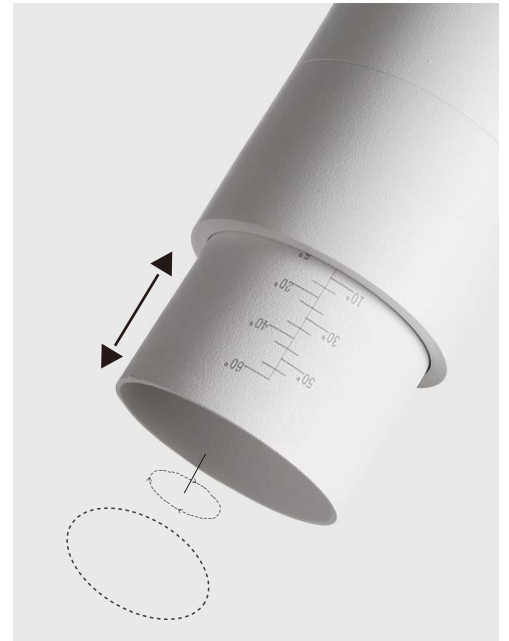

5-60° scale marking Accurate casting to ensure precise beam angle 15W with beam angle 8-45° and 30W with beam angle 18-55° can cover most of the lighting applications. Stock can be optimized.

Stepless adjustment of color temperature or brightness;

Switch key for brightness and color temperature

Color temperature adjustment.
Total 7 color temperatures for selection:

2700K	3000K	3500K	4000K	5000K	5700K	6500K
-------	-------	-------	-------	-------	-------	-------


Brightness adjustment,
4 levels in total,

25%	50%	75%	100%
-----	-----	-----	------


Besides the wide beam angle, considering the application convenience, a digital display screen is installed on the top of the lamp body where the company LOGO, color temperature and brightness is readable. In practical applications, if the product to be displayed is at similar parameter as of the configured one, user can copy the settings of the first light to other lights, simplify the entire installation and debugging process with great efficiency.

Fabrice


MHT8837, 15W, 285-653LUM

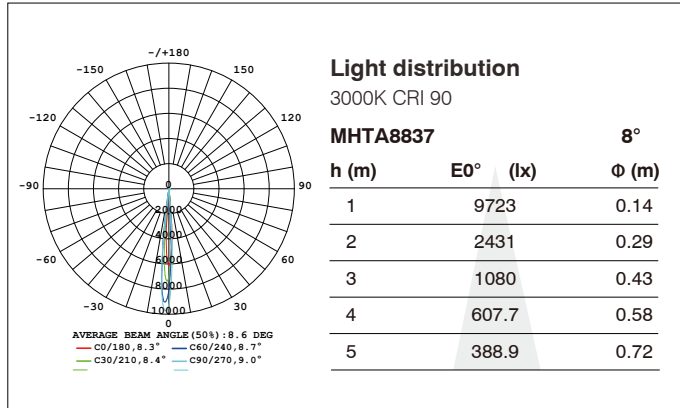


MHT8837, 15W, 285-653LUM

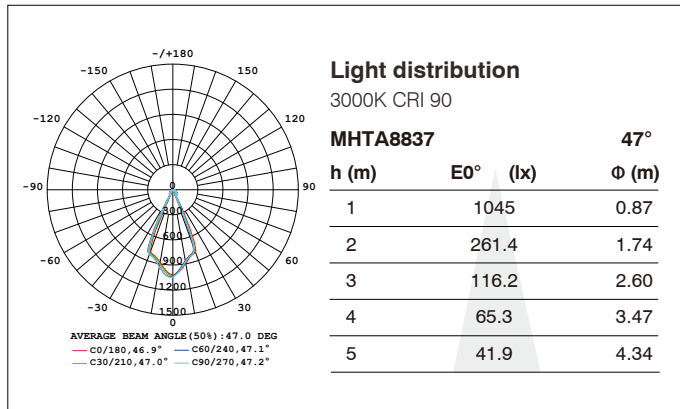


MHT8847, 30W, 970-1962LUM

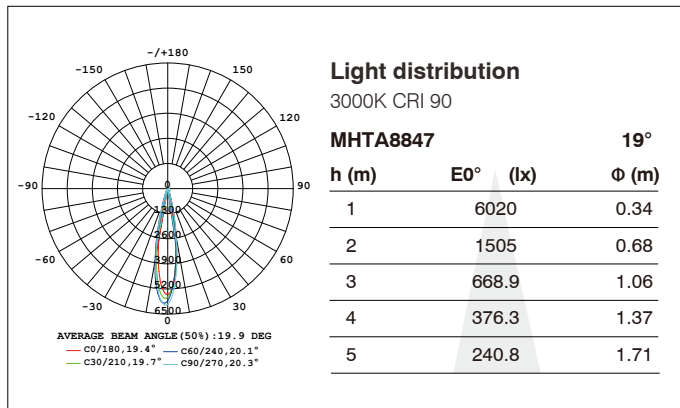


MHT8847, 30W, 970-1962LUM

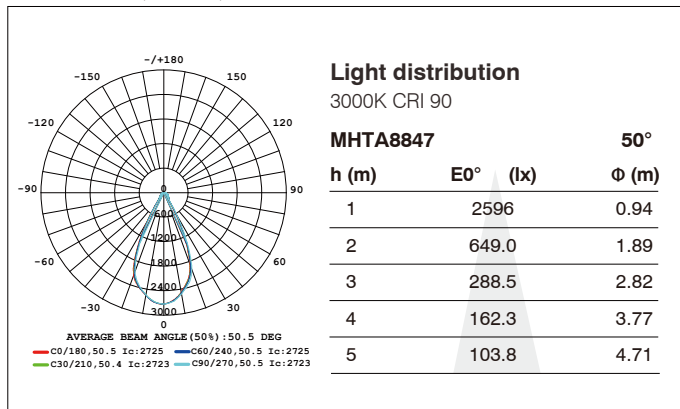


MHT8837A, 15W,107-370LUM

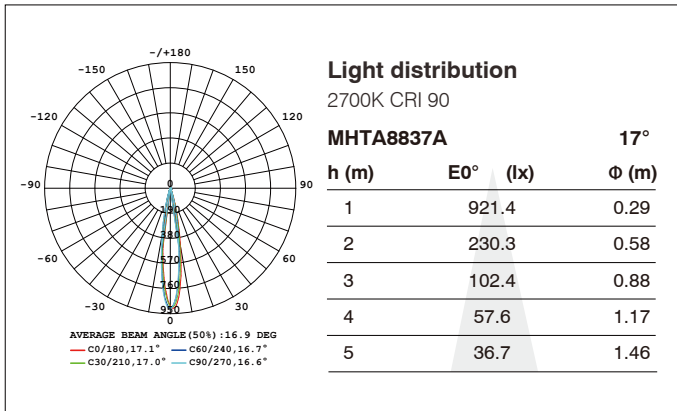


MHT8837A, 15W, 107-370LLUM

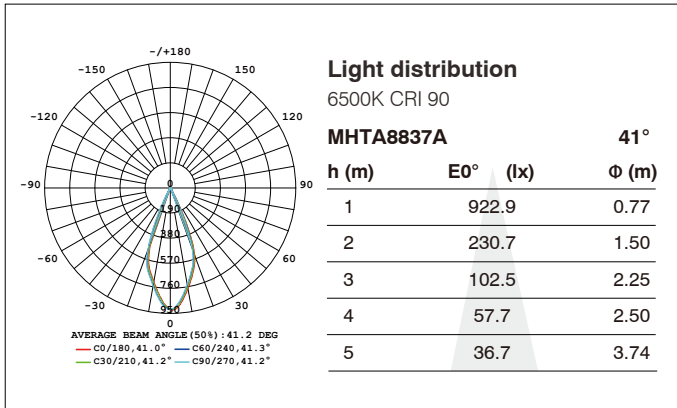

MHT8847A, 30W, 707-1889LUM

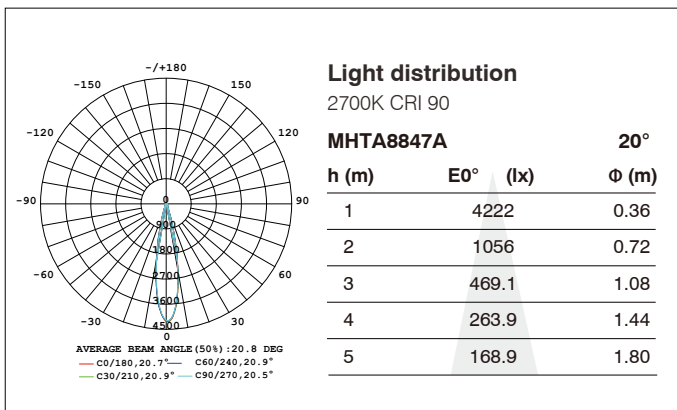

MHT8847A, 30W, 707-1889LUM

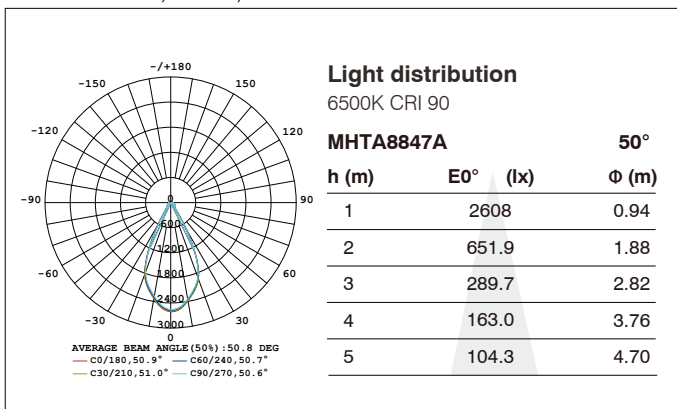



KETAI INDUSTRIES LIGHTING CO.,LTD.
Ketai Building, 4 Mashe New Street, Lishui, Nanhai,
Foshan Guangdong, China
T : +86 757 8560 7707
F : +86 757 8563 3675
E : sales@ketailighting.com

Join Us!

www.ketailighting.com

KETAI[®]