

# CLIP SERIES



# Clip Series - Surface Mounted Light



**Light distribution**  
3000K CRI 90

<b>XD2021</b>		<b>24°</b>
h (m)	E0° (lx)	Φ (m)
1	4200	0.43
2	1050	0.85
3	466.7	1.28
4	262.5	1.70
5	168.0	2.13



**Light distribution**  
3000K CRI 90


<b>XD2021B</b>		<b>39°</b>
h (m)	E0° (lx)	Φ (m)
1	1158	0.71
2	289.5	1.43
3	128.7	2.14
4	72.4	2.86
5	46.3	3.57



**Light distribution**  
3000K CRI 90

<b>XD2104</b>		<b>31°</b>
h (m)	E0° (lx)	Φ (m)
1	2348	0.55
2	587.0	1.10
3	260.9	1.65
4	146.7	2.20
5	93.9	2.75

**Control Type**




**Luminaire specifications**

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
XD2021	11W	942	3000K	25/50°	Bridgelux	Areek	90
XD2021B	15W	1078	3000K	24/40°	Citizen	Areek	90
XD2104	14W	1316	3000K	30/60°	Bridgelux	Areek	90

All values are measured at 220V(+/- 10%).  
Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
Colour Rendering Index (CRI) CRI80, CRI90  
Die-casting Aluminum

**Frame Finishing color**

- Black RAL9005
- Grey RAL9006
- White RAL9016

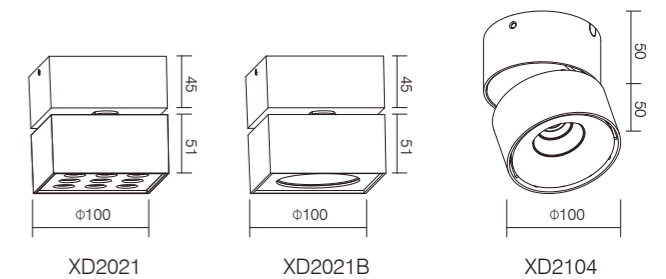

Remark: ● Technical information may change, please refer to the datasheet.