



# Extrem Series

## Surface Mounted Light



### Control Type



### Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
XD2145	8W	352	3000K	7°	CREE	LIFUD	90
XD2145A	14W	1089	3000K	15/25/38/60°	CITIZEN	TRIDONIC	90

All values are measured at 220V(+/- 10%).  
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
 Colour Rendering Index (CRI) CRI80, CRI90  
 Die-casting Aluminum

### Front Ring Finishing color



### Replaceable Accessories



### Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016



### Light distribution

3000K CRI 90


XD2145	7°		
h (m)	E0° (lx)	Φ (m)	
1	11039	0.11	
2	2760	0.23	
3	1227	0.34	
4	689.9	0.46	
5	441.6	0.57	



### Light distribution

3000K CRI 90

XD2145A	25°		
h (m)	E0° (lx)	Φ (m)	
1	3086	0.45	
2	771.5	0.90	
3	342.9	1.35	
4	192.9	1.80	
5	123.4	2.25	

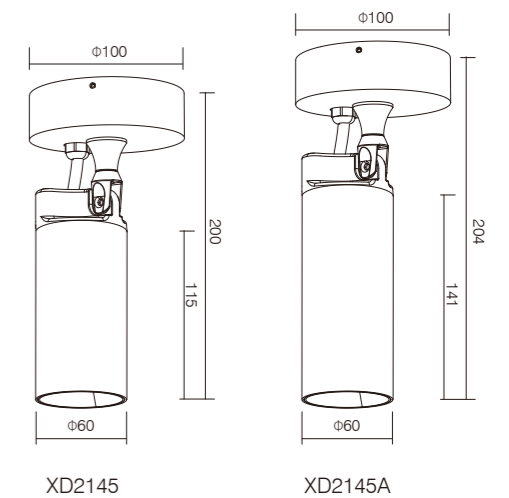

Remark: ● Technical information may change, please refer to the datasheet.