


# Sardine Series

## Surface Mounted Light



### Control Type



### Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
XD2036-1	7.5W	827	3000K	30/60°	Bridgelux	Areek	90
XD2036-2	7.5Wx2	770x2	3000K	30/60°	Bridgelux	TRIDONIC	90

All values are measured at 220V(+/- 10%).  
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
 Colour Rendering Index (CRI) CRI80, CRI90  
 Die-casting Aluminum

### Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016



XD2036-1

### Light distribution

3000K CRI 90

XD2036-1	30°	
h (m)	E0° (lx)	Φ (m)
1	1203	0.54
2	300.9	1.08
3	133.7	1.62
4	75.2	2.16
5	48.1	2.70




XD2036-2

### Light distribution

3000K CRI 90

XD2036-2	34°	
h (m)	E0° (lx)	Φ (m)
1	2435	0.62
2	608.8	1.23
3	270.6	1.85
4	152.2	2.46
5	97.4	3.08

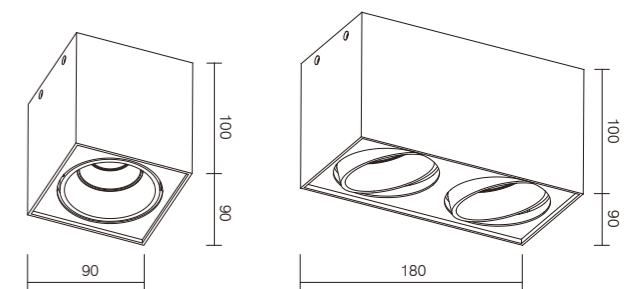

XD2036-1

XD2036-2

# SARDINE SERIES

Remark: ● Technical information may change, please refer to the datasheet.