


CANEO SERIES



Match different inner rings

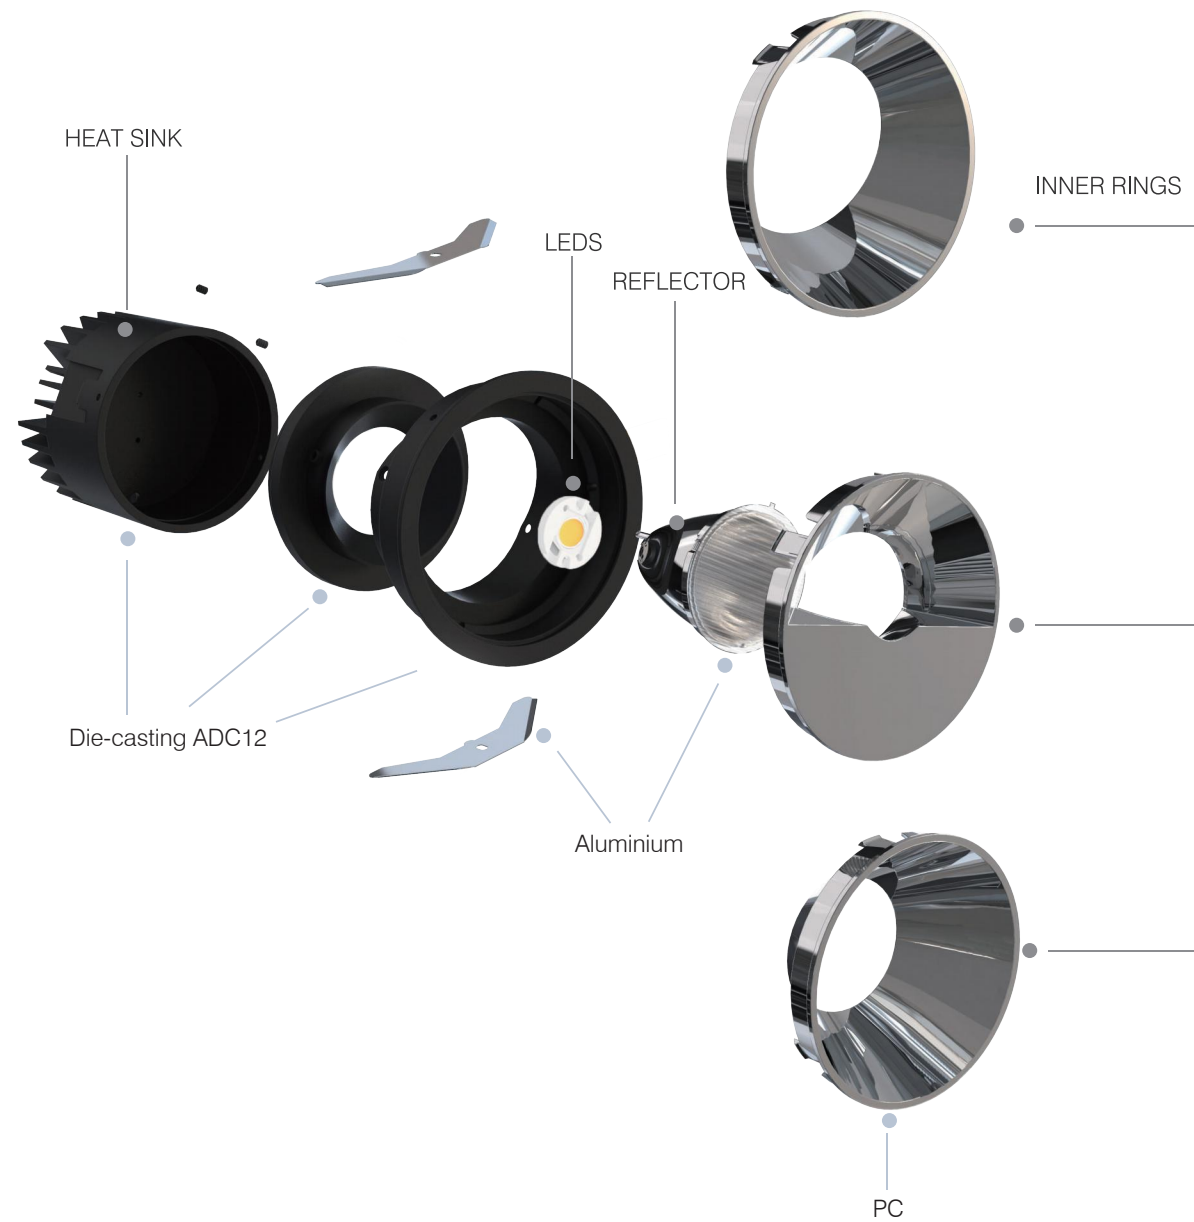

Caneo Series - Recessed Downlight



KT7063

Light distribution
3000K CRI 90

KT7063	37°	
h (m)	E0° (lx)	Φ (m)
1	1864	0.67
2	465.9	1.37
3	207.1	2.01
4	116.5	2.68
5	74.6	3.35



KT7063A

Light distribution
3000K CRI 90

KT7063A	15°	
h (m)	E0° (lx)	Φ (m)
1	8806	0.26
2	2201	0.52
3	978.4	0.78
4	550.4	1.05
5	352.2	1.31



KT7063B

Light distribution
3000K CRI 90

KT7063B	19°	
h (m)	E0° (lx)	Φ (m)
1	9303	0.33
2	2326	0.67
3	1034	1.00
4	581.5	1.33
5	372.1	1.67



KT7064

Light distribution
3000K CRI 90

KT7064	40°	
h (m)	E0° (lx)	Φ (m)
1	1264	0.73
2	316.1	1.47
3	140.5	2.20
4	79.0	2.94
5	50.6	3.67



KT7064A

Light distribution
3000K CRI 90

KT7064A	27°	
h (m)	E0° (lx)	Φ (m)
1	4330	0.47
2	1083	0.94
3	481.1	1.41
4	270.6	1.89
5	173.2	2.36



KT7064B

Light distribution
3000K CRI 90

KT7064B	20°	
h (m)	E0° (lx)	Φ (m)
1	4276	0.36
2	1069	0.72
3	475.1	1.08
4	267.2	1.44
5	171.0	1.80

Control Type

On-off
 0-10V
 Phase-Cut
 DALI
 Casambi


Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	CRI
KT7063	20W	1180	3000K	18/23/36°	Φ100	Citizen	OSRAM	90
KT7064	15W	602	3000K	18/25/35°	Φ80	Bridgelux	OSRAM	90
KT7063A	20W	1740	3000K	18/23/36°	Φ100	Citizen	OSRAM	90
KT7064A	15W	1161	3000K	18/25/35°	Φ80	Bridgelux	OSRAM	90
KT7063B	20W	1940	3000K	18/23/36°	Φ100	Citizen	OSRAM	90
KT7064B	15W	1020	3000K	18/25/35°	Φ80	Bridgelux	OSRAM	90

All values are measured at 220V(+/- 10%).
Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
Colour Rendering Index (CRI) CRI80, CRI90
Die-casting Aluminum

Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016

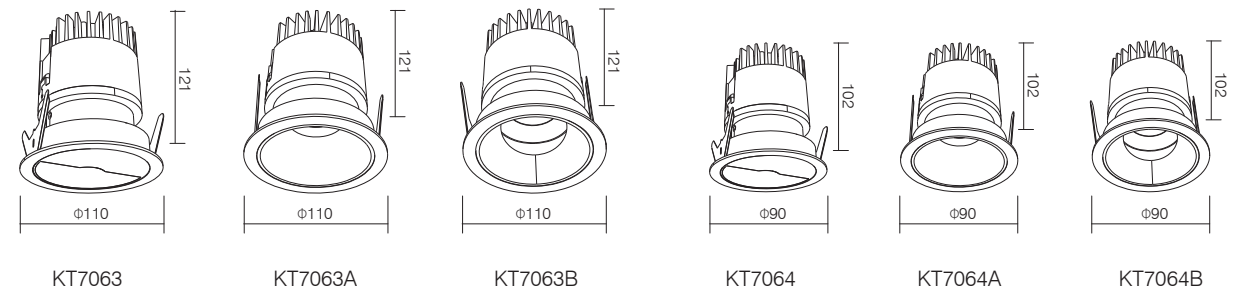

Remark: ● Technical information may change, please refer to the datasheet.