



PRO
SERIES

Pro Series - Recessed Downlight



KT7248

Light distribution

3000K CRI 90

KT7248		43°	
h (m)	E0° (lx)	Φ (m)	
1	1880	0.79	
2	470.0	1.58	
3	208.9	2.36	
4	117.5	3.15	
5	75.2	3.94	



KT7249

Light distribution

3000K CRI 90

KT7249		32°	
h (m)	E0° (lx)	Φ (m)	
1	3562	0.57	
2	890.6	1.14	
3	395.8	1.72	
4	222.7	2.29	
5	142.5	2.86	



KT7250

Light distribution

3000K CRI 90

KT7250		41°	
h (m)	E0° (lx)	Φ (m)	
1	4876	0.76	
2	1219	1.52	
3	541.8	2.27	
4	304.8	3.03	
5	195.1	3.79	

Control Type



Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	CRI
KT7248	10W	892	3000K	15/24/38°	Φ60	Bridgelux	OSRAM	90
KT7249	14W	1219	3000K	15/24/38°	Φ75	Bridgelux	OSRAM	90
KT7250	24W	2099	3000K	15/24/38°	Φ95	Bridgelux	OSRAM	90


All values are measured at 220V(+/- 10%).
Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
Colour Rendering Index (CRI) CRI80, CRI90
Die-casting Aluminum

Front Ring Finishing color



Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016

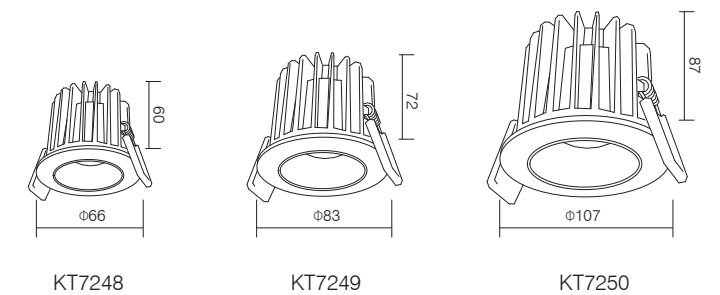

Remark: ● Technical information may change, please refer to the datasheet.



Pro Series - Recessed Downlight



Control Type



Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	CRI
KT7253	14W	902	3000K	15/24/36/45°	Ø75	Bridgelux	OSRAM	90
KT7254	20W	1405	3000K	15/24/36/45°	Ø95	Bridgelux	OSRAM	90

All values are measured at 220V(+/- 10%).
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
 Colour Rendering Index (CRI) CRI80, CRI90
 Die-casting Aluminum

Front Ring Finishing color



Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016



Light distribution

3000K CRI 90


KT7253		44°
h (m)	E0° (lx)	Φ (m)
1	1452	0.81
2	362.9	1.62
3	161.3	2.43
4	90.7	3.25
5	58.1	4.06




Light distribution

3000K CRI 90

KT7254		31°
h (m)	E0° (lx)	Φ (m)
1	4512	0.55
2	1128	1.09
3	501.3	1.64
4	282.0	2.18
5	180.5	2.73

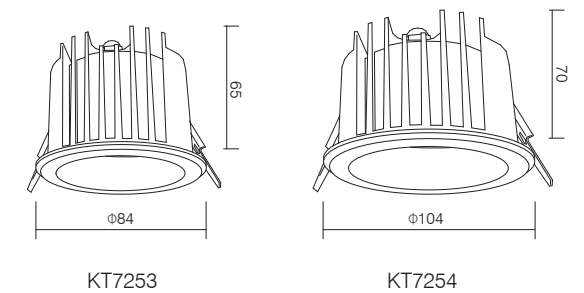

Remark: ● Technical information may change, please refer to the datasheet.

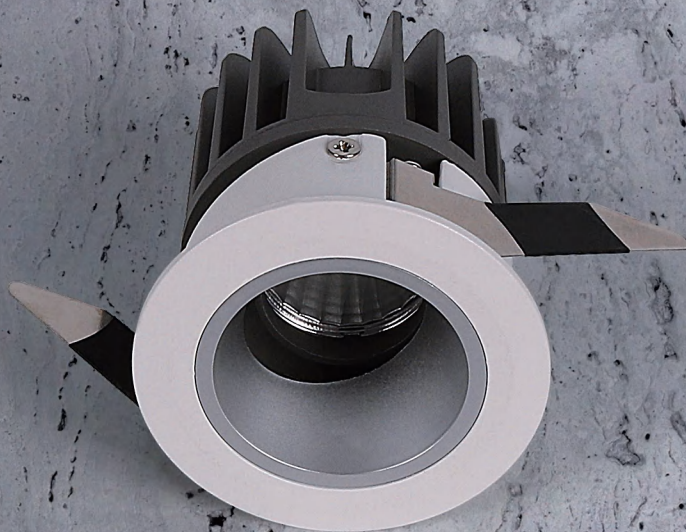

PRO
SERIES

SIDIZ



Pro Series - Recessed Downlight



Control Type



Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	CRI
KT7251	10W	575	3000K	15/24/38°	Ø60	Bridgelux	OSRAM	90
KT7252	14W	831	3000K	15/24/38°	Ø75	Bridgelux	OSRAM	90

All values are measured at 220V(+/- 10%).
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.
 Colour Rendering Index (CRI) CRI80, CRI90
 Die-casting Aluminum

Front Ring Finishing color



Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016



Light distribution

3000K CRI 90


KT7251		35°
h (m)	E0° (lx)	Φ (m)
1	1861	0.63
2	465.3	1.25
3	206.8	1.88
4	116.3	2.50
5	74.4	3.13



Light distribution

3000K CRI 90

KT7252		28°
h (m)	E0° (lx)	Φ (m)
1	3937	0.49
2	984.3	0.98
3	437.5	1.48
4	246.1	1.97
5	157.5	2.46

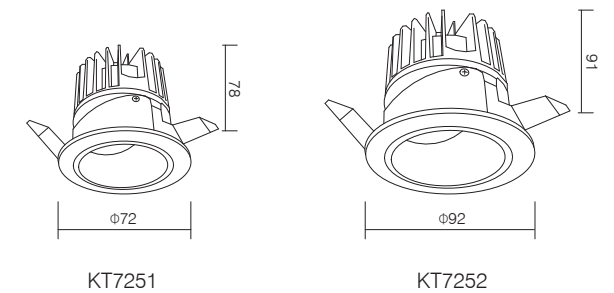

Remark: ● Technical information may change, please refer to the datasheet.