

# CAN SERIES

**C**  
Gemini Series

**E**

**B**  
Dark Series


**A**  
V Series




# Can Series



MHT8890A, 28W, 2786LUM

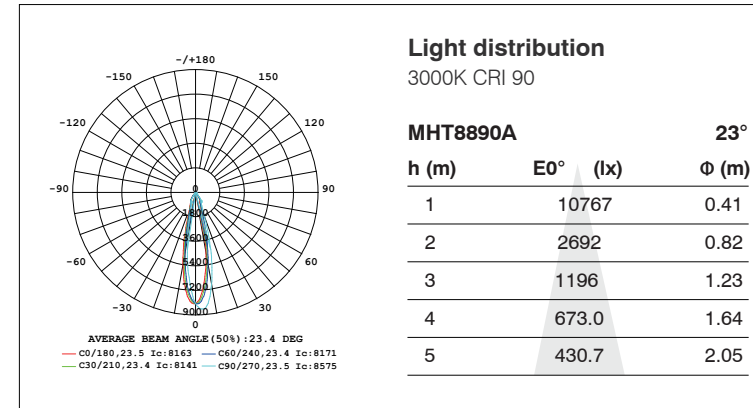

## Control Type



## Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
MHT8890A	28W	2786	3000K	16/24/40/60°	Bridgelux	TRIDONIC	90
MHT8891A	21W	1913	3000K	20/25/36/50°	Bridgelux	TRIDONIC	90
MHT8892A	12W	968	3000K	15/25/38/60°	Bridgelux	TRIDONIC	90
MHT8893A	8W	834	3000K	15/25/38/60°	Bridgelux	TRIDONIC	90


All values are measured at 220V(+/- 10%).  
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
 Colour Rendering Index (CRI) CRI80, CRI90  
 Die-casting Aluminum

## Frame Finishing color


- Black RAL9005
- Grey RAL9006
- White RAL9016





MHT8891A, 21W, 1913LUM

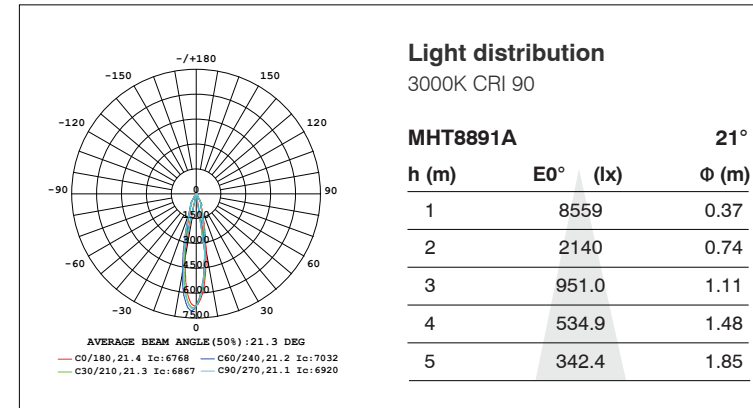

MHT8892A, 12W, 968LUM

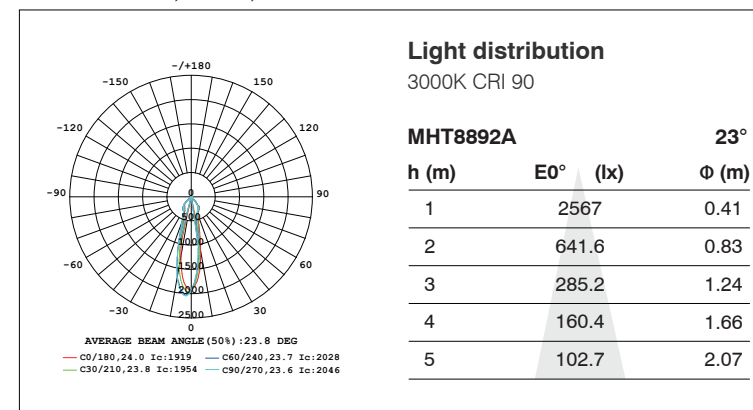


MHT8893A, 8W, 834LUM

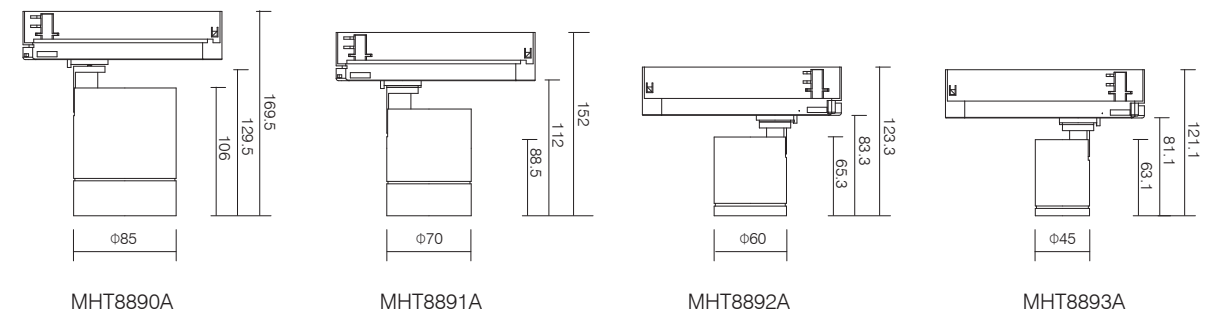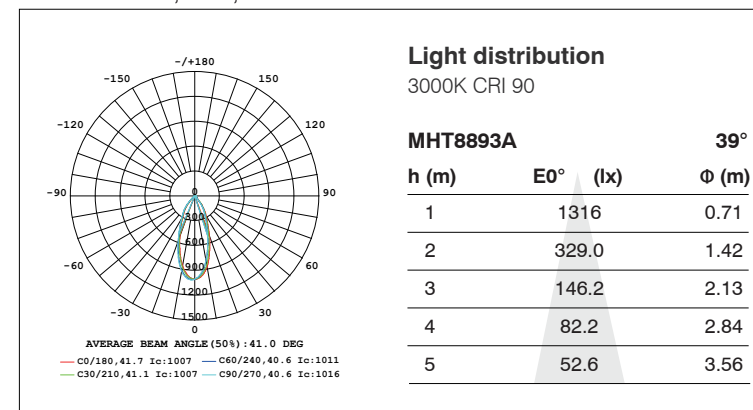


# Can Series




MHT8890B, 28W, 2896LUM

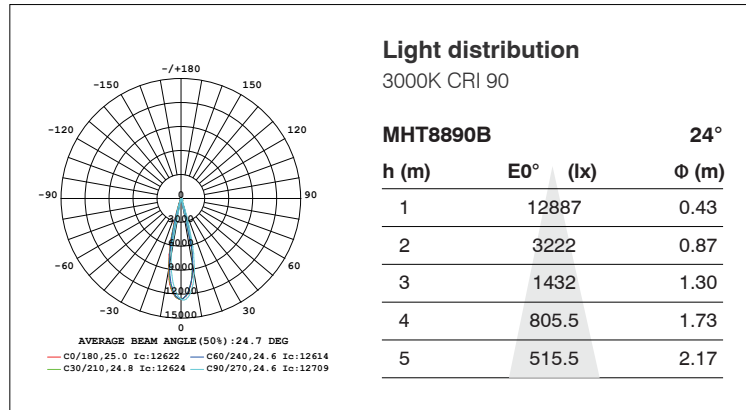


MHT8891B, 20W, 1642LUM

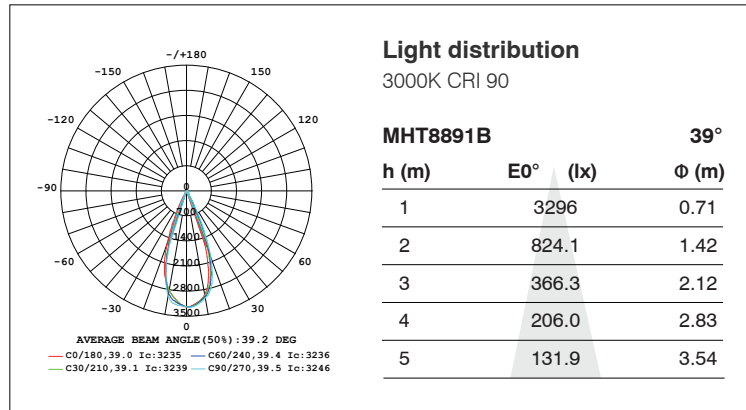


MHT8892B, 12W, 1043LUM

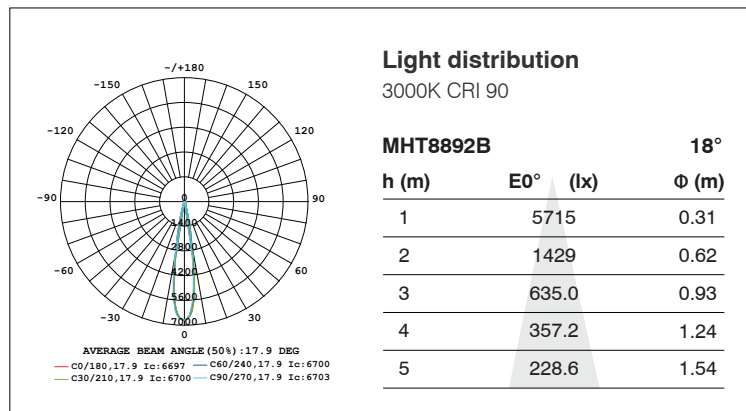

MHT8893B, 8W, 787LUM

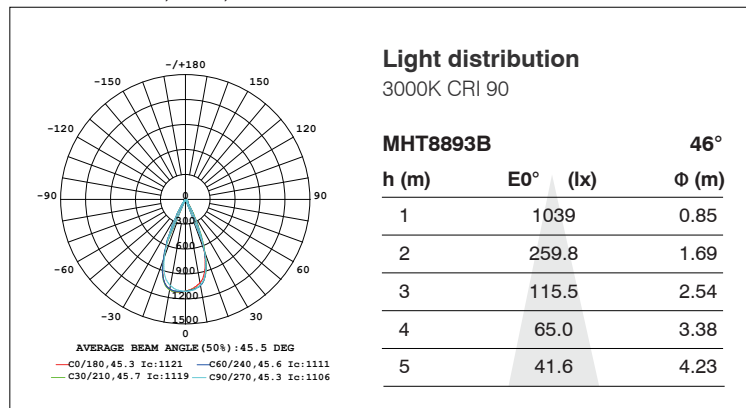

## Control Type




## Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
MHT8890B	28W	2896	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90
MHT8891B	20W	1642	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90
MHT8892B	12W	1043	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90
MHT8893B	8W	787	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90

All values are measured at 220V(+/- 10%).  
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
 Colour Rendering Index (CRI) CRI80, CRI90  
 Die-casting Aluminum

## Frame Finishing color


- Black RAL9005
- Grey RAL9006
- White RAL9016

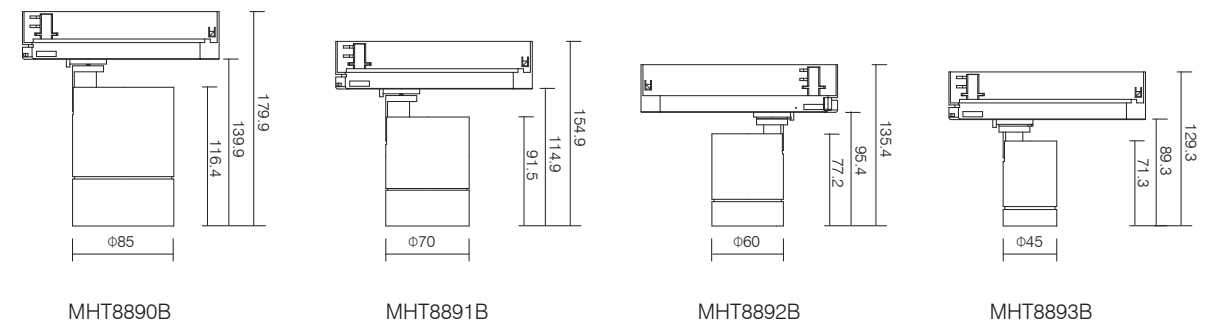


# Can Series




MHT8890C, 28W, 2397LUM

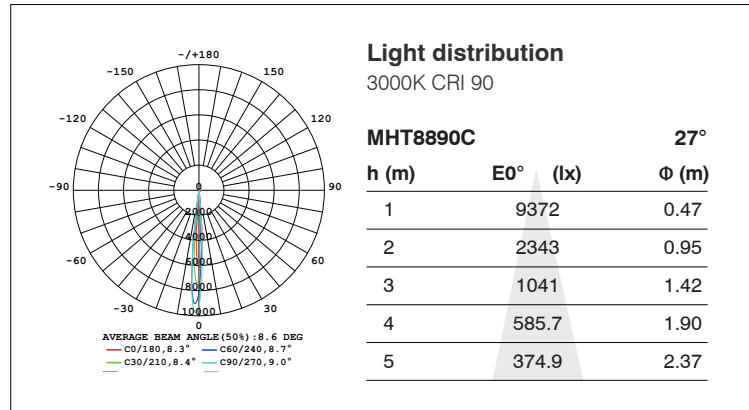


MHT8891C, 20W, 1511LUM

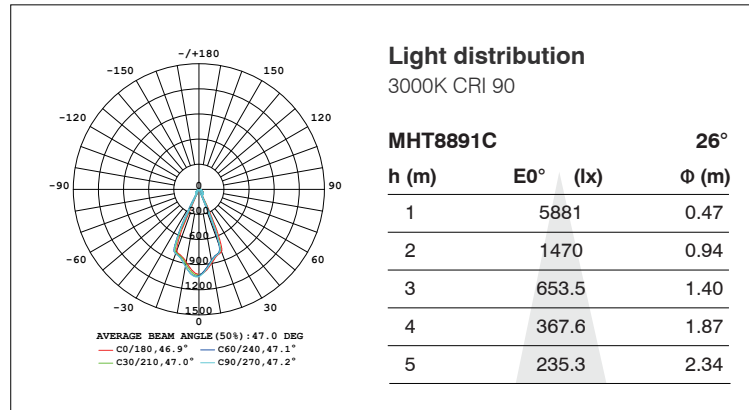


MHT8892C, 12W, 753LUM

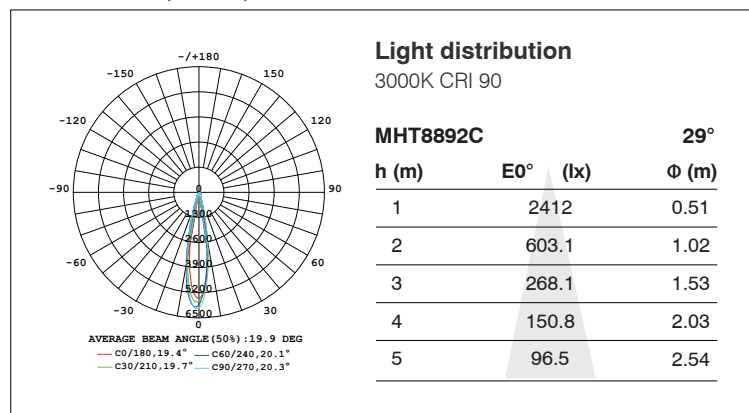

MHT8893C, 8W, 519LUM

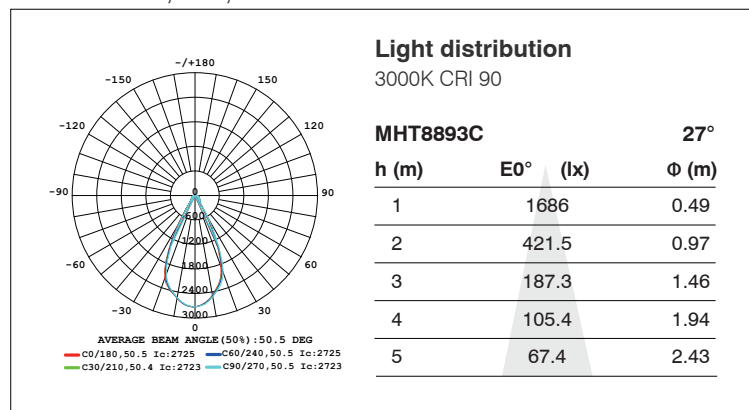

## Control Type




## Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
MHT8890C	28W	2397	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90
MHT8891C	20W	1511	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90
MHT8892C	12W	753	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90
MHT8893C	8W	519	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90

All values are measured at 220V(+/- 10%).  
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
 Colour Rendering Index (CRI) CRI80, CRI90  
 Die-casting Aluminum

## Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016

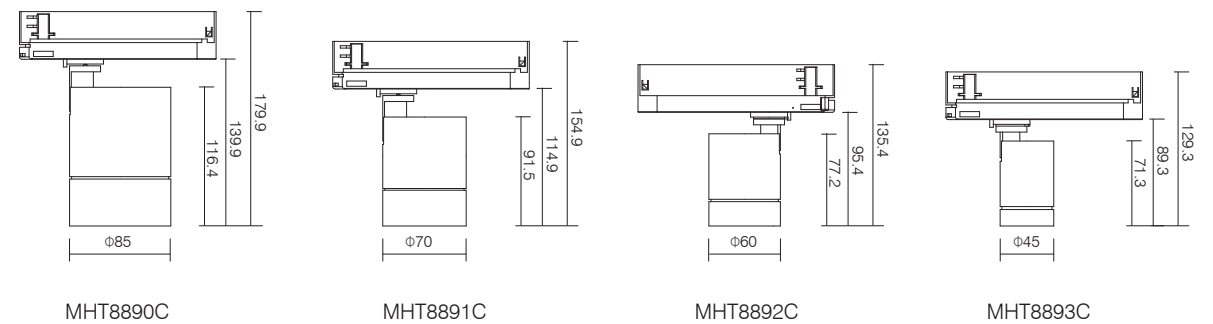

# Can Series



## Control Type




## Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
MHT8890E	28W	2085	3000K	16/24/40/60°	Bridgelux	TRIDONIC	90
MHT8891E	20W	1012	3000K	15/24/36/50°	Bridgelux	TRIDONIC	90


All values are measured at 220V(+/- 10%).  
Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
Colour Rendering Index (CRI) CRI80, CRI90  
Die-casting Aluminum

## Frame Finishing color


- Black RAL9005
- Grey RAL9006
- White RAL9016

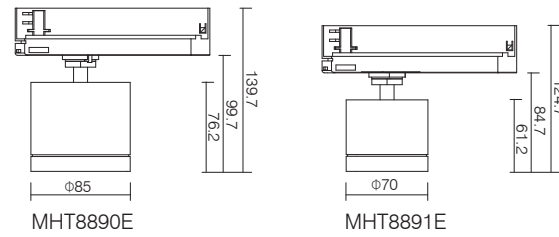

MHT8890E, 28W, 2085LUM

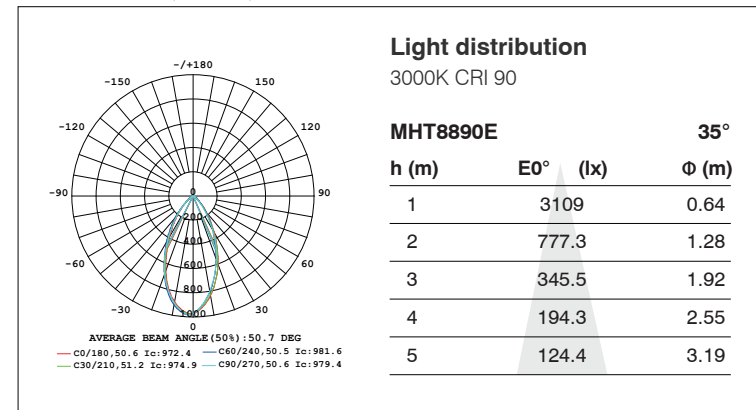

MHT8891E, 20W, 1012LUM

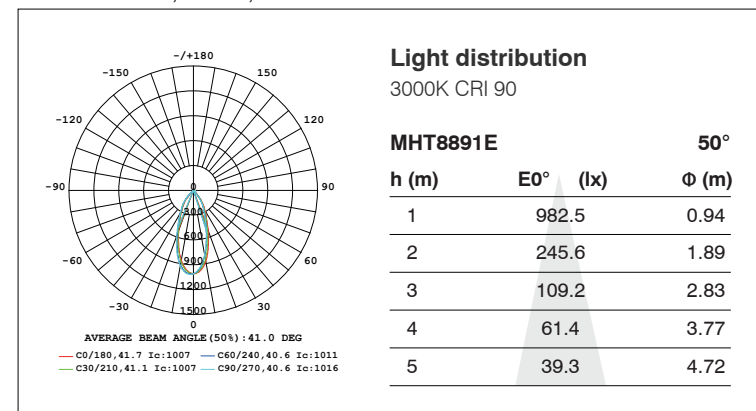


# Can Series




MHT8890A(High)

MHT8890A, 28W, 3716LUM

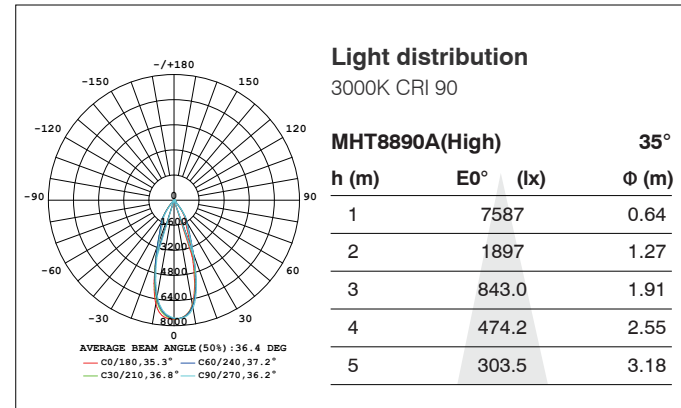


MHT8890B

MHT8890B, 28W, 2750LUM

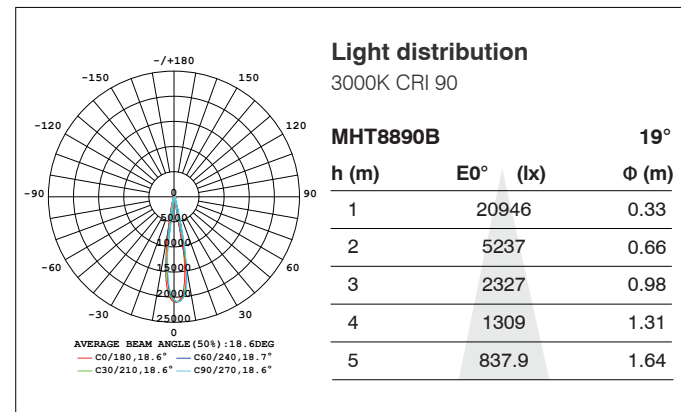

MHT8890C

MHT8890C, 28W, 2344LUM

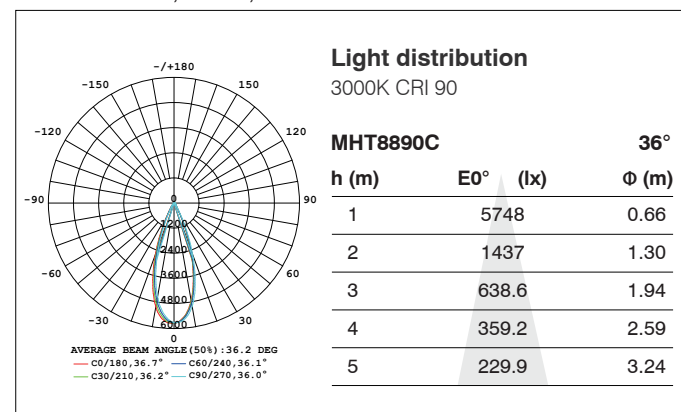

## Control Type




## Luminaire specifications

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	CRI
MHT8890A(High)	28W	3716	3000K	16/24/40/60°	LUMINUS	KGP	90
MHT8890B	28W	2750	3000K	10/15/24/36/50°	Bridgelux	KGP	90
MHT8890C	28W	2344	3000K	10/15/24/36/50°	Bridgelux	KGP	90


All values are measured at 220V(+/- 10%).  
 Color temperature range 2700K/3000K/3500K/4000K/5000K/6000K/Tunable White.  
 Colour Rendering Index (CRI) CRI80, CRI90  
 Die-casting Aluminum

## Frame Finishing color

- Black RAL9005
- Grey RAL9006
- White RAL9016

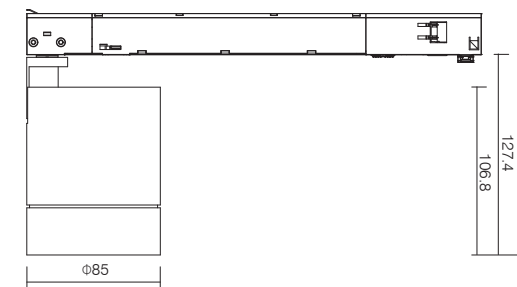

MHT8890A(High)

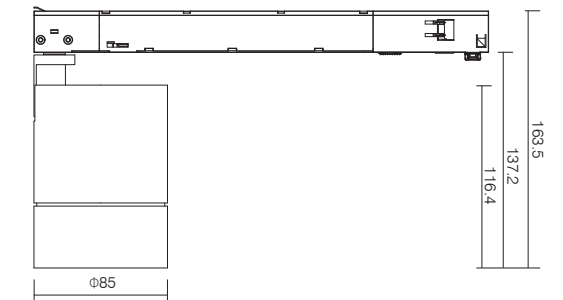

MHT8890B  
MHT8890C

Remark: ● Technical information may change, please refer to the datasheet.