

KETAI[®]

OSLO Series



Join Us!

KETAI INDUSTRIES LIGHTING CO.,LTD.
Ketai Building, 4 Mashe New Street, Lishui, Nanhai
Foshan, Guangdong, China 528244
T : +86 757 8560 7707
F : +86 757 8563 3675
E : sales@ketailighting.com
www.ketailighting.com

KETAI[®]

KETAI INDUSTRIES LIGHTING CO.,LTD.



The first generation

The ultra-thin lens matches the AC COB to achieve the ultimate lighting. Available in track, ceiling, and recessed installation. The color collocation is mainly black, white and grey. Applying black silkscreen glass makes the color and material matching more exquisite.



Second generation

Retain the original appearance designs, adopt integrated track driver, and upgrade COB, improving the product light effect. A variety of choices of diffuser and cut-shape are used with small-angle lens, and users can adjust the light spot according to actual needs.



Third Generation

The appearance and structure of the product are optimized, fashionable and youthful, with diverse colors. With Darkoo's ultra-thin lens, the spot effect is significantly improved, and the UGR of the product is improved. At the same time, the product series is more complete, adding wall lamps, pendant lamps, single / double head ceiling spotlights.



JION US

OSLO FAMILY

Our OSLO family are designed special for only you. It is DOB version without driver box attached which make it more slim shape.


There are 3 sizes options from 10w to 20w. This family also offer track and surface mounted, two installation options.



Track Light
KTK1 8834 10W 650LM
KTK1 8835 15W 975LM
KTK1 8836 20W 1200LM



Ceiling Light
XD2131 10W 650LM
XD2187 15W 975LM
XD2188 20W 1300LM

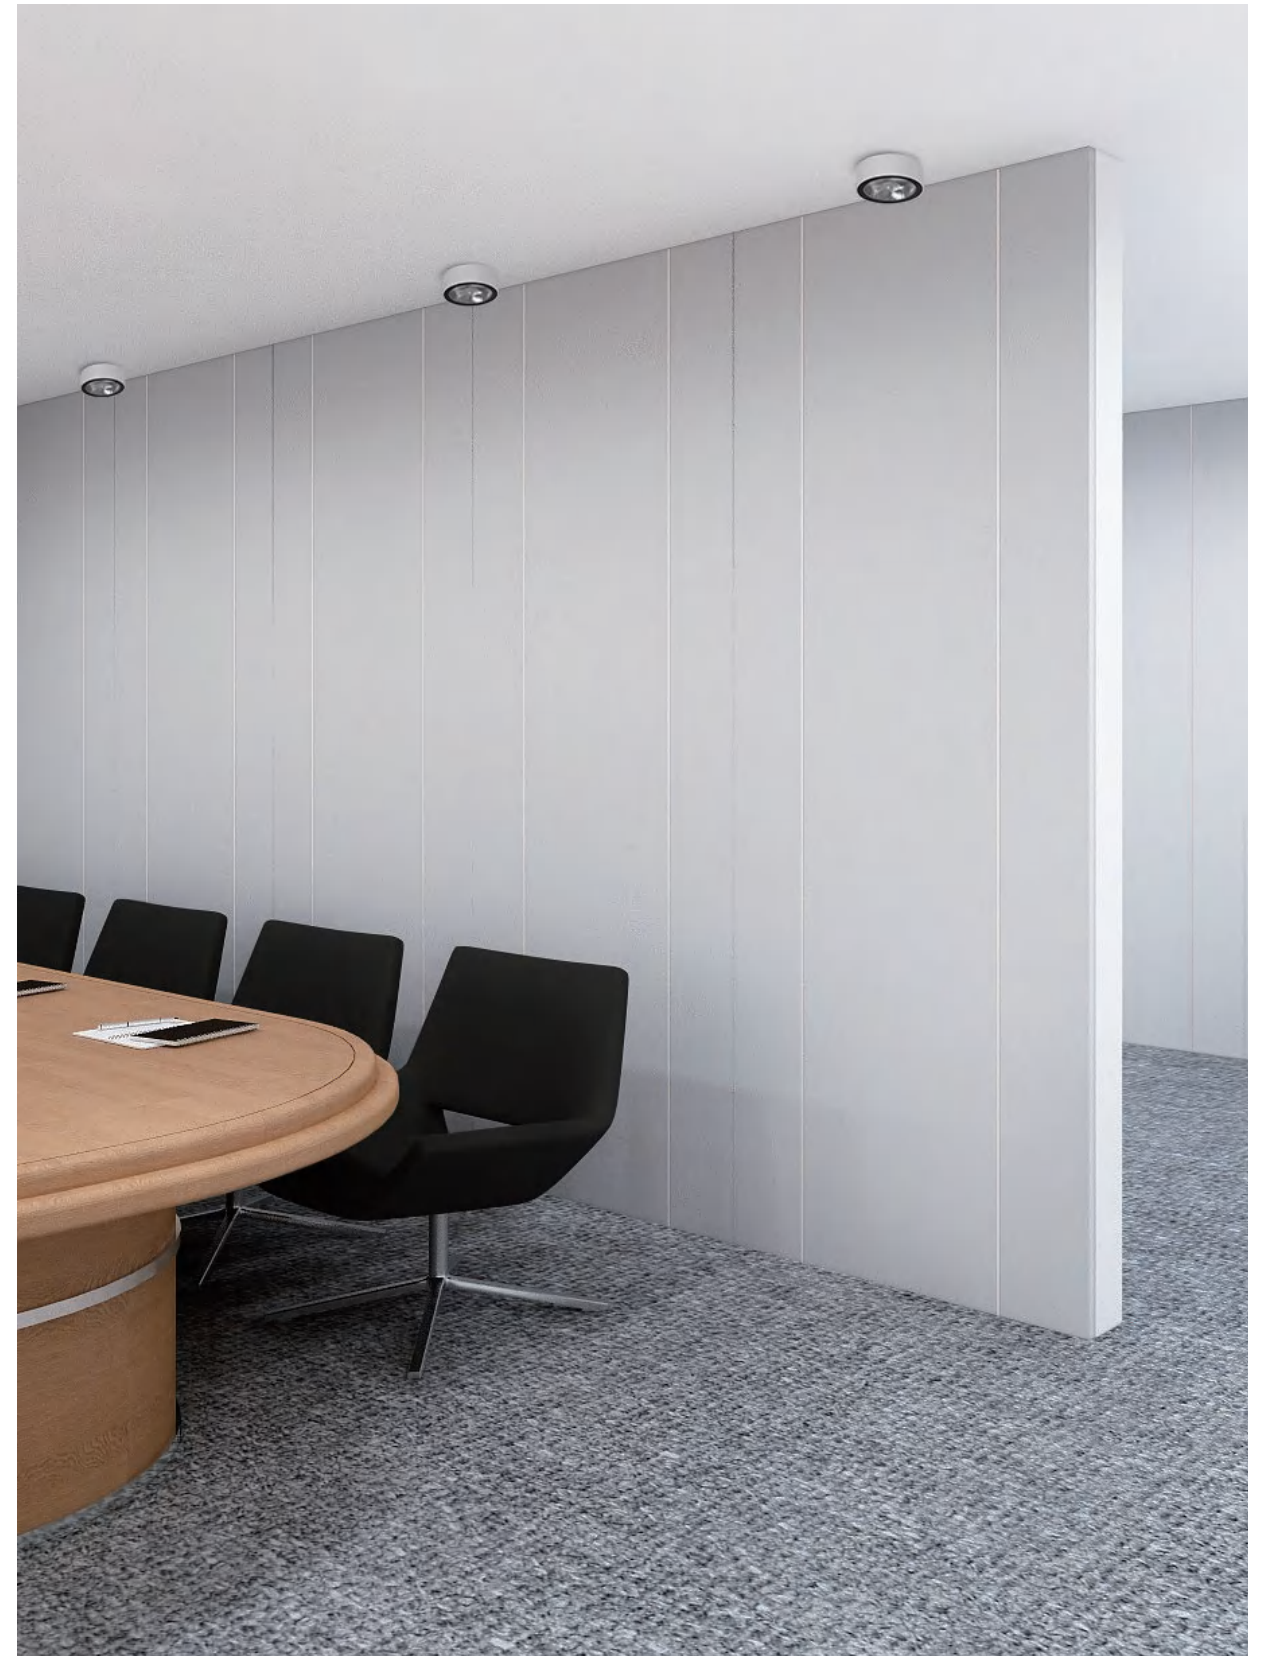



XD2131 / XD2187 / XD2188

- 30mm thickness
- DOB version without driver
- 3 installation options
- 3 sizes options (Φ90mm, Φ105mm, Φ120mm)



KTK1 8837 / KTK1 8835 / KTK1 8836




KT6793 / KT6794 / KT6795



OLSO FAMILY
TILTABLE & ROTATABLE TRACK LIGHT

TECH. DRAWING



OLSO FAMILY

LED AC 220-240 V IP20 ZMO


	W	LUM	CCT	BEAM	CRI	DIA	H	T
KTK1 8834	10	650	3000K	30°	80	Φ90mm	125mm	30mm
KTK1 8835	15	950	3000K	30°	80	Φ105mm	140mm	32mm
KTK1 8836	20	1200	3000K	30°	80	Φ120mm	155mm	33mm

OPTIONS

- Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 10° 20° 30°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION	LUMENS
DRIVER OPTION	/

REFERENCE DRAWING

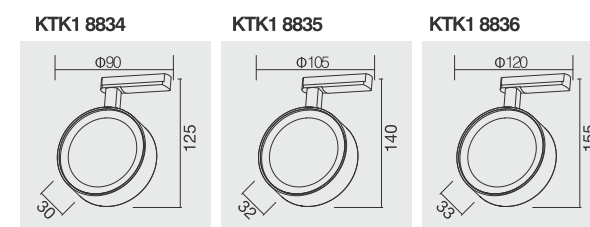


SURFACE MOUNTED LIGHT-2016



OLSO FAMILY FIXED CEILING LIGHT

TECH. DRAWING



OLSO FAMILY

LED AC 220-240 V IP20 ZMO


	W	LUM	CCT	BEAM	CRI	DIA	H
XD2131	10	650	3000K	30°	80	Φ90mm	30mm
XD2187	15	950	3000K	30°	80	Φ105mm	32mm
XD2188	20	1200	3000K	30°	80	Φ120mm	33mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 10° 20° 30°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION	LUMENS
DRIVER OPTION	/

REFERENCE DRAWING

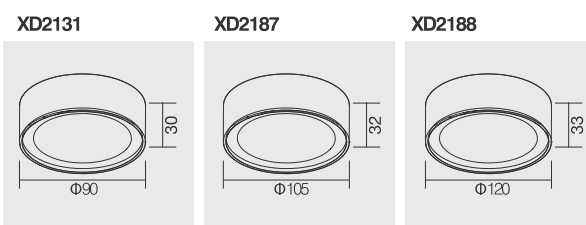


2016-RECESSED DOWNLIGHT



OLSO FAMILY TILTABLE & ROTATABLE DOWNLIGHT

TECH. DRAWING



OLSO FAMILY

LED AC 220-240 V IP20 ZMO


	W	LUM	CCT	BEAM	CRI	DIA	H	T	CUTOUT
KT6793	10	650	3000K	30°	80	Φ90mm	130mm	30mm	Φ98mm
KT6794	15	950	3000K	30°	80	Φ105mm	145mm	32mm	Φ98mm
KT6795	20	1200	3000K	30°	80	Φ120mm	160mm	33mm	Φ98mm

OPTIONS

Color RAL 9016 RAL 9006 RAL 9005
 Beam Angle 10° 20° 30°
 CCT 2700K 3000K 4000K
 CRI 80 90

SOURCE OPTION	LUMENS
DRIVER OPTION	/

REFERENCE DRAWING

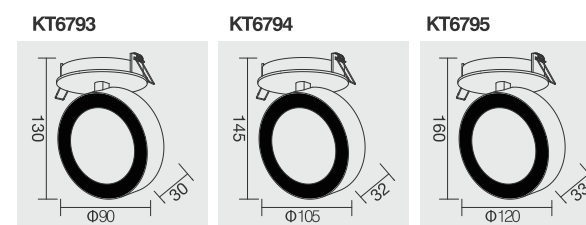




OSLO FAMILY



TECH. DRAWING

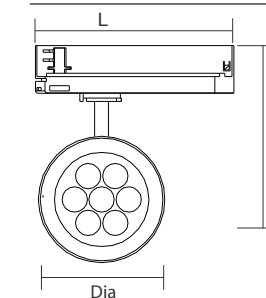

OSLO FAMILY

LED  220-240 V IP20 Bridgelux OSRAM

	W	LUM	CCT	BEAM	CRI	DIA	H	L
MHT8914	15	1180	3000K	23°	90	Φ105mm	181mm	165mm

OPTIONS

Color	<input type="radio"/> RAL 9016	<input type="radio"/> RAL 9006	<input type="radio"/> RAL 9005
Beam Angle	<input type="radio"/> 18°	<input type="radio"/> 23°	<input type="radio"/> 36°
CCT	<input type="radio"/> 2700K	<input type="radio"/> 3000K	<input type="radio"/> 4000K
CRI	<input type="radio"/> 80	<input type="radio"/> 90	


SOURCE OPTION


/

DRIVER OPTION

/

REFERENCE DRAWING

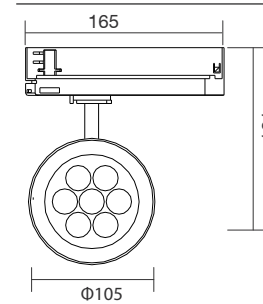

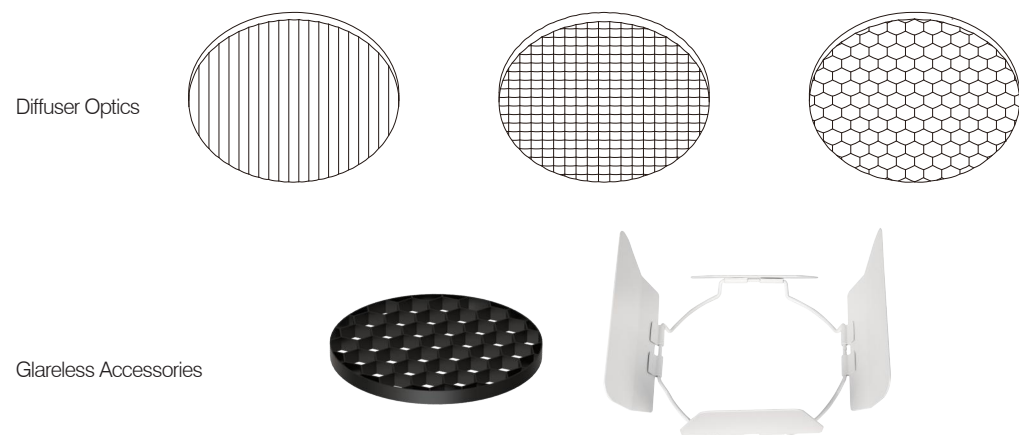


Freely replace optical lenses and accessories for perfect lighting

Simple and exquisite, it can easily realize the perfect conversion of 9 different light types in one step, making the lighting design of your museums and galleries more comfortable.

9 light types, flexible replacement, make the layout more flexible

Realize the multi-purpose of one lamp, reduce the lamp reserve of museums and art galleries, and greatly reduce the cost of lighting equipment.


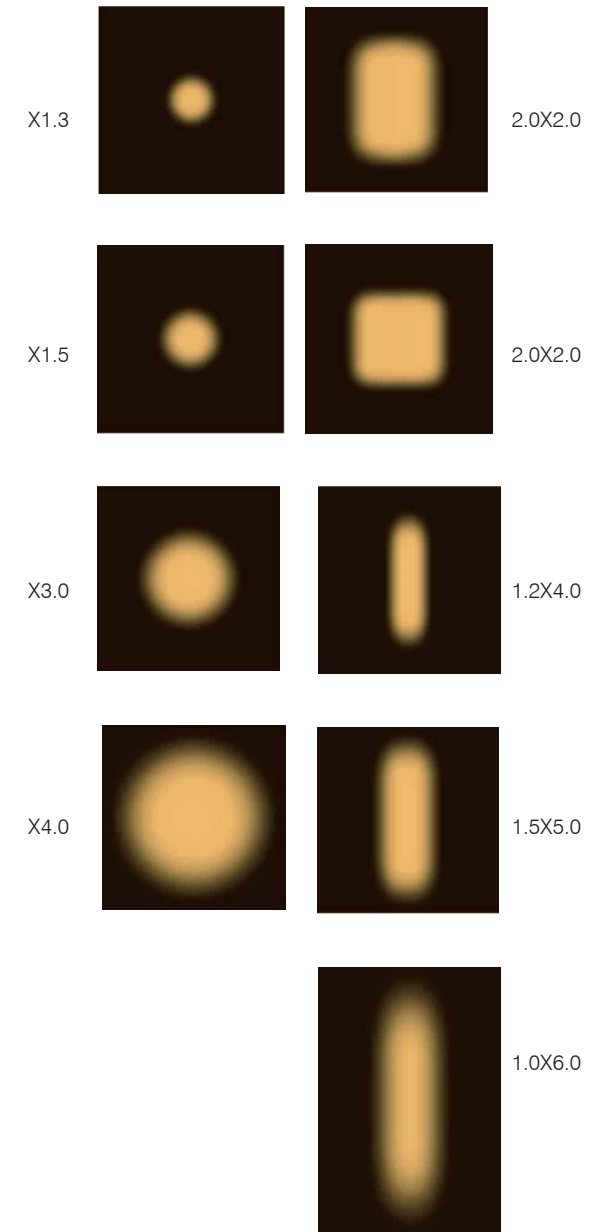





OSLO Series- Recessed fixed downlight




KT7374, 10W, 1027LM

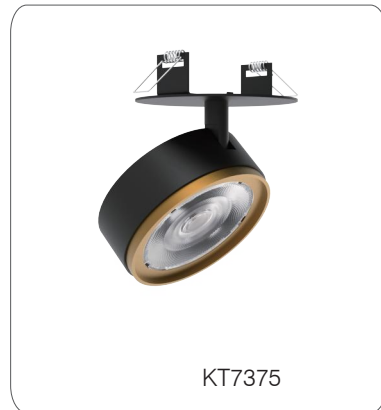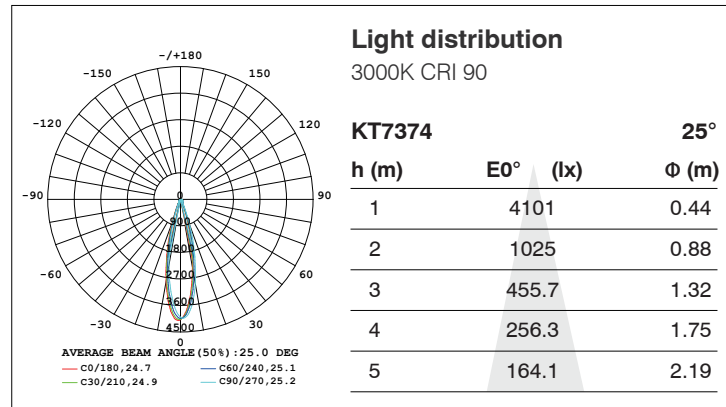


KT7375, 15W, 1476LM

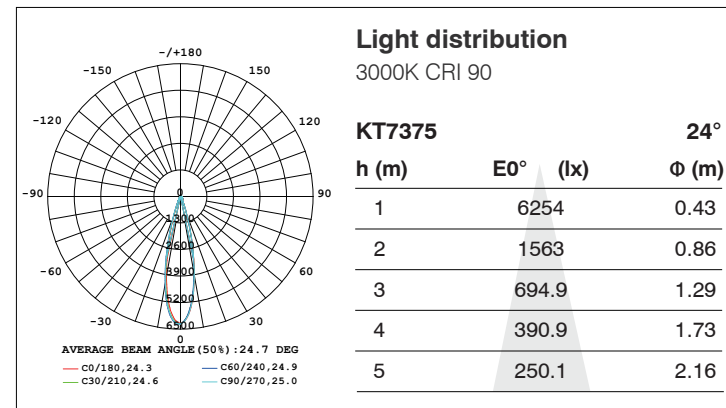

KT7376, 20W, 1996LM

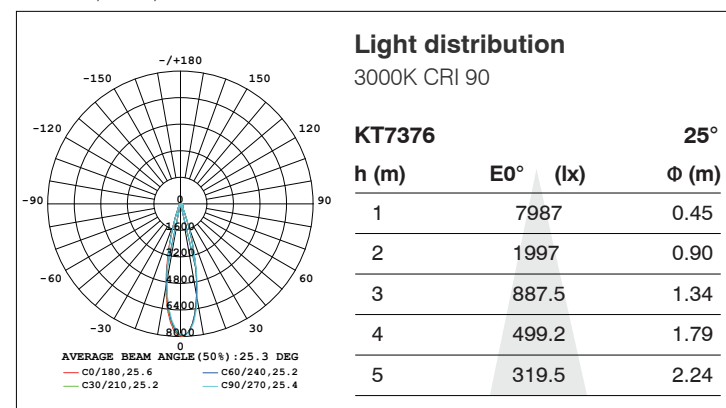


Control Type on request




Luminaire specifications

Model	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
KT7374	10W	1027	3000K	24°	Ø85	Bridgelux	KEGU	20	90
KT7375	15W	1476	3000K	24°	Ø85	Bridgelux	KEGU	20	90
KT7376	20W	1996	3000K	24°	Ø85	Bridgelux	KEGU	20	90

Frame finishing color

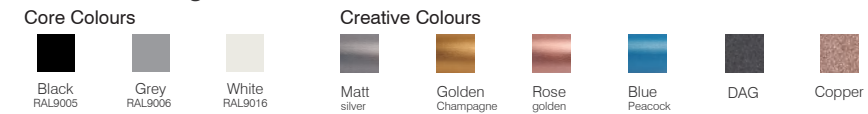

Color temperature range





Colour Rendering Index



Front Reflector color




Beam angle

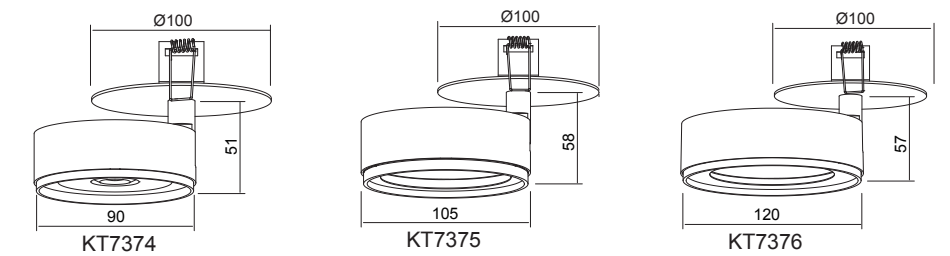


OSLO Series- Surface Mounted Light




XD2305, 10W, 1027LM

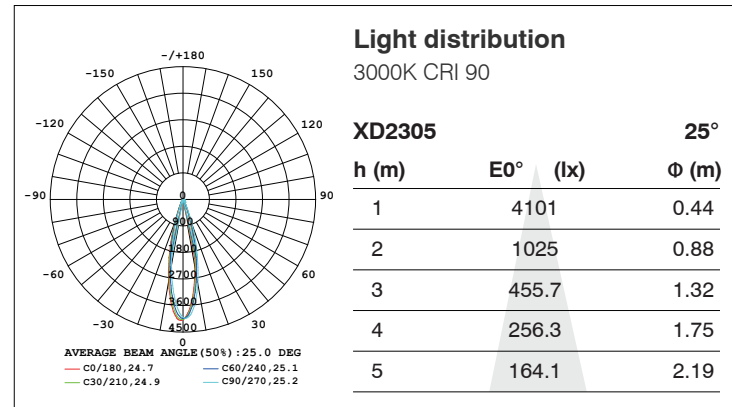


XD2307, 15W, 1476LM

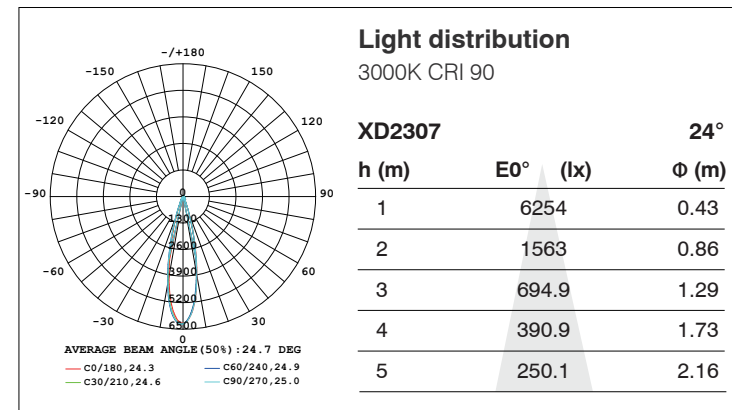

XD2309, 20W, 1996LM

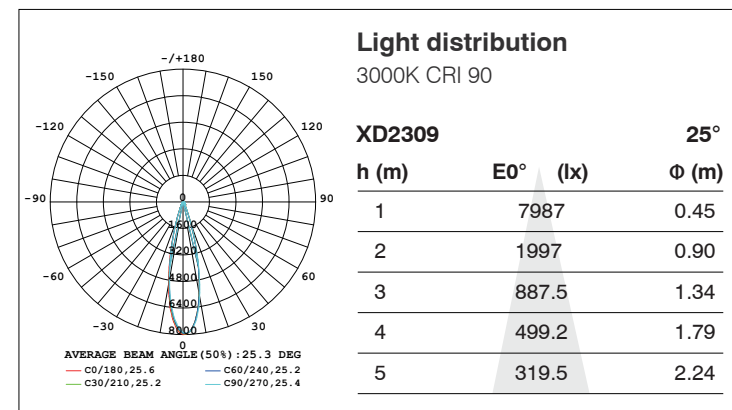

Control Type on request



Luminaire specifications


Model	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
XD2305	10W	1027	3000K	24°	Ø20	Bridgelux	KEGU	20	90
XD2307	15W	1476	3000K	24°	Ø20	Bridgelux	KEGU	20	90
XD2309	20W	1996	3000K	24°	Ø20	Bridgelux	KEGU	20	90

Frame finishing color


Core Colours




Creative Colours



Color temperature range




Colour Rendering Index



Front Reflector color




Beam angle

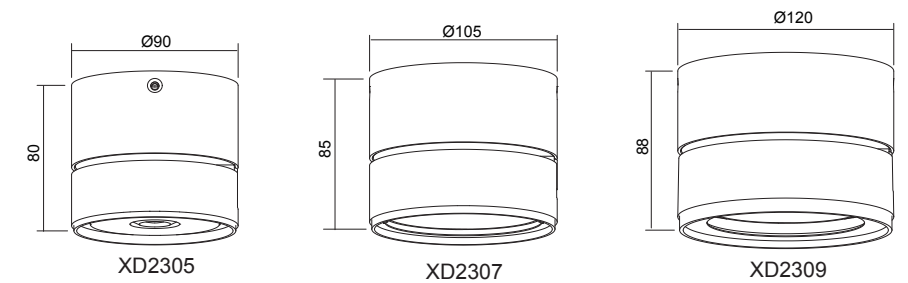


OSLO Series- Surface Mounted Light




XD2306, 10W, 1027LM

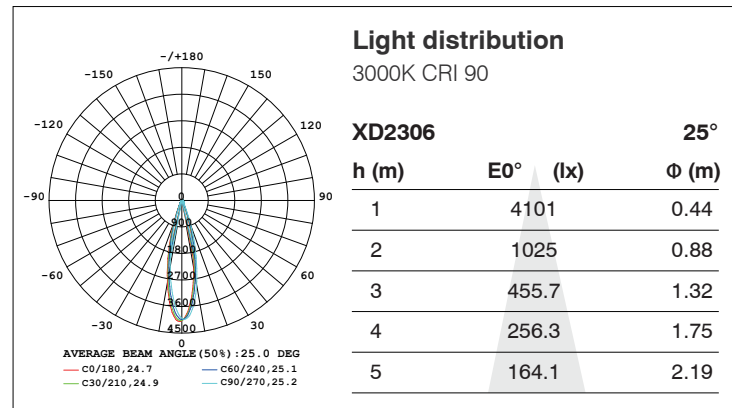


XD2308, 15W, 1476LM

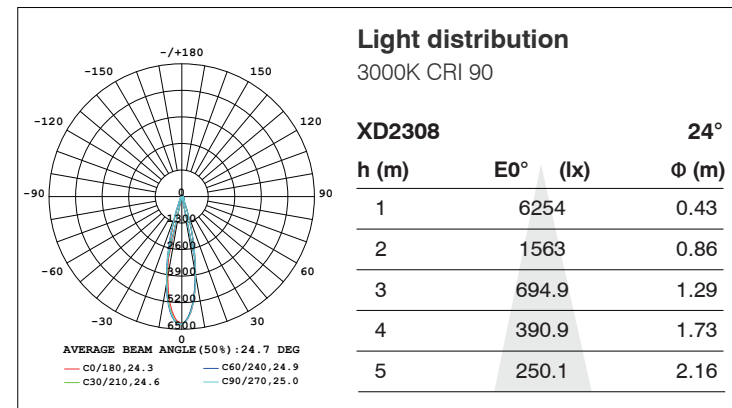

XD2310, 20W, 1996LM

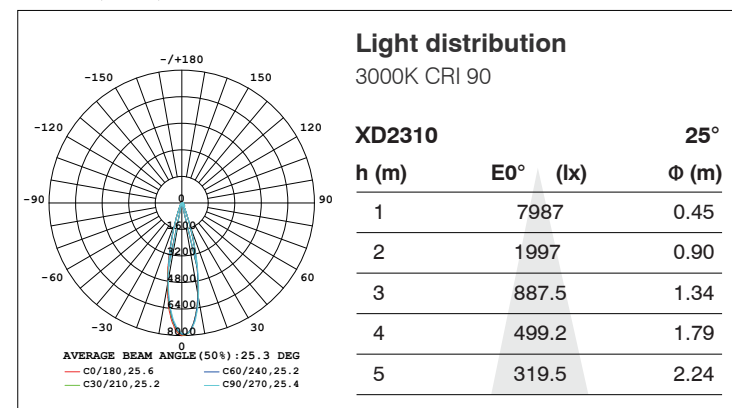

Control Type on request




Luminaire specifications

Model	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
XD2306	10W	1027	3000K	24°	Ø20	Bridgelux	KEGU	20	90
XD2308	15W	1476	3000K	24°	Ø20	Bridgelux	KEGU	20	90
XD2310	20W	1996	3000K	24°	Ø20	Bridgelux	KEGU	20	90

Frame finishing color



Color temperature range




Colour Rendering Index



Front Reflector color



Beam angle

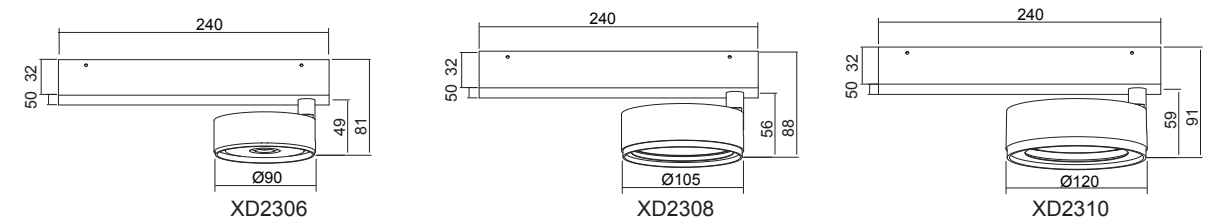


OSLO Series- Surface Mounted Light





XD2306-2

XD2306-2, 20W, 2400LM

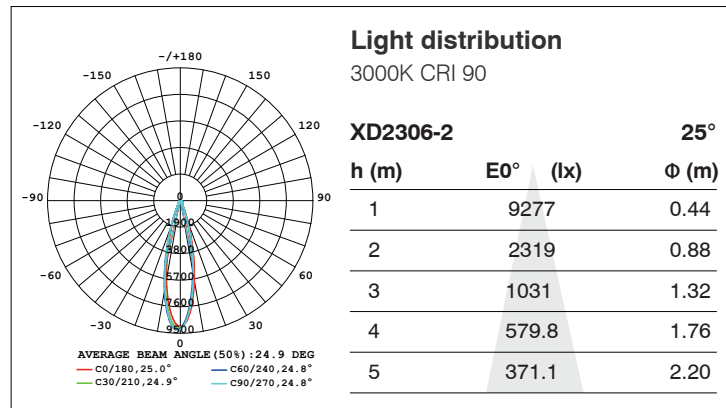


XD2308-2

XD2308-2, 30W, 2780LM

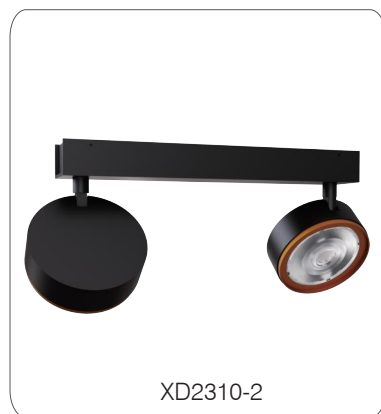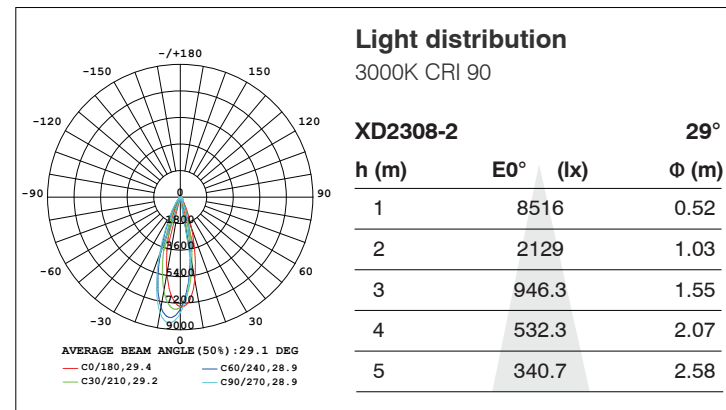


XD2310-2

XD2310-2, 40W, 4018LM

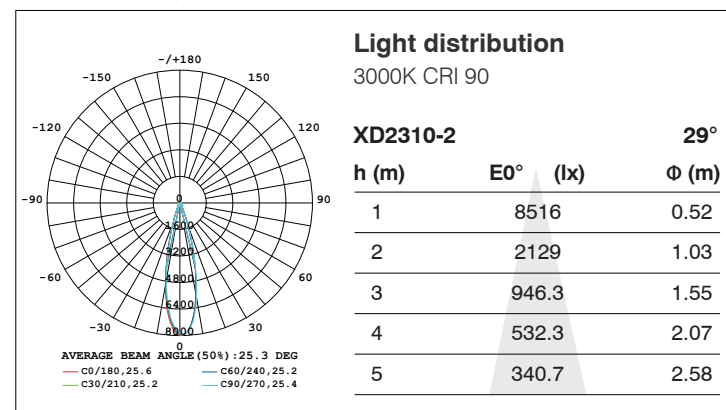

Control Type on request




Luminaire specifications

Model	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
XD2306-2	20W	2400	3000K	24°	Φ20	Bridgelux	KEGU	20	90
XD2308-2	30W	2780	3000K	24°	Φ20	Bridgelux	KEGU	20	90
XD2310-2	40W	4018	3000K	24°	Φ20	Bridgelux	KEGU	20	90


Frame finishing color



Color temperature range




Colour Rendering Index



Front Reflector color




Beam angle

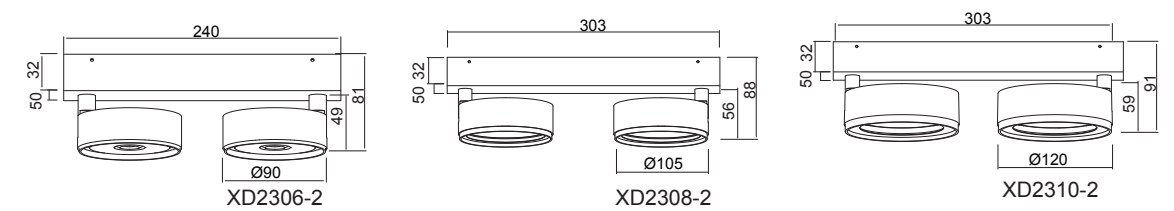


OSLO Series- Track downlight




MHT8971, 10W, 1027LM

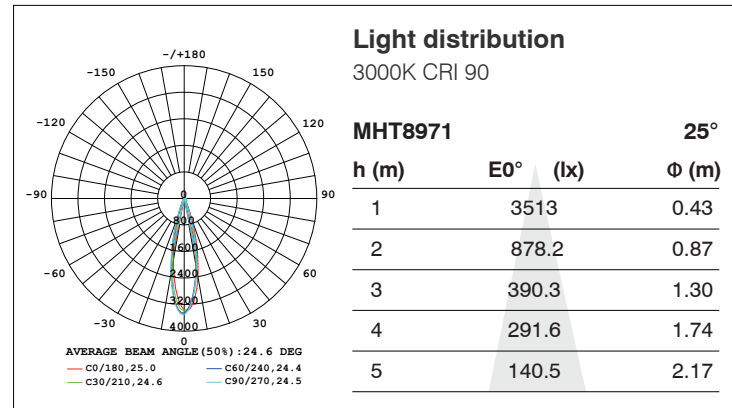


MHT8972, 15W, 1478LM

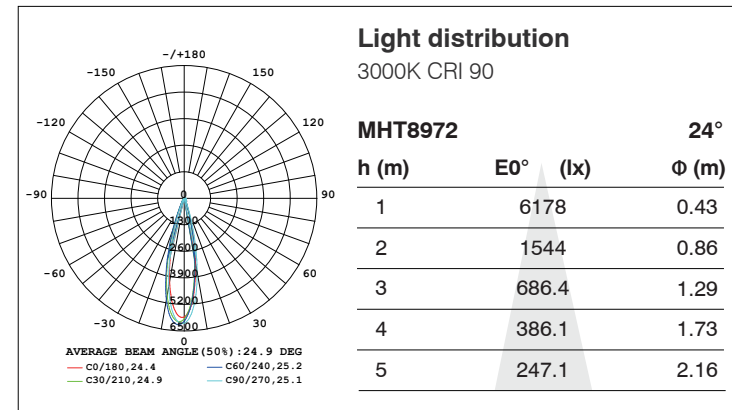

MHT8973, 20W, 1960LM

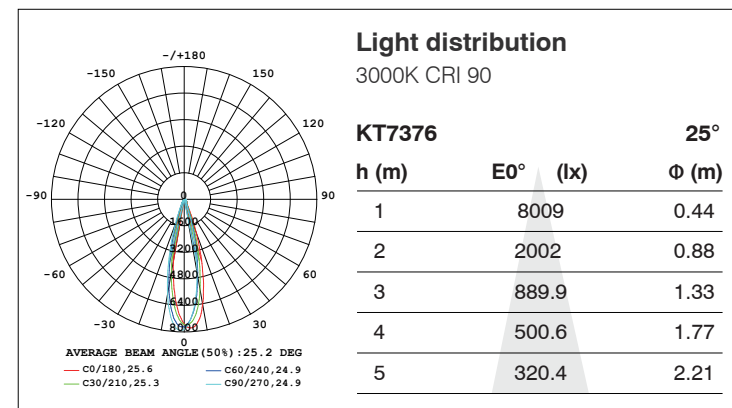

Control Type on request




Luminaire specifications

Model	Power	Lumen	CCT	BA.	Light Source	Driver	IP	CRI
MHT8971	10W	1027	3000K	24°	Bridgelux	KEGU	20	90
MHT8972	15W	1478	3000K	24°	Bridgelux	KEGU	20	90
MHT8973	20W	1960	3000K	24°	Bridgelux	KEGU	20	90

Frame finishing color



Color temperature range




Colour Rendering Index



Front Reflector color



Beam angle

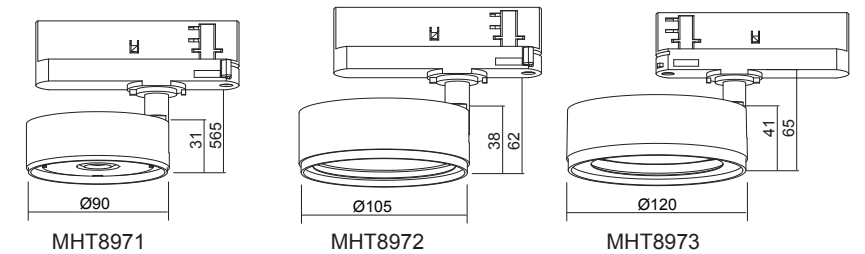


OSLO Series- Pendant Light




SL430

SL430, 10W, 1027LM

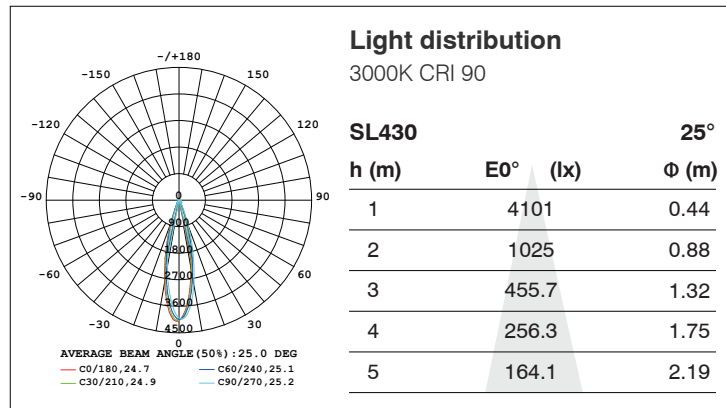


SL431

SL431, 15W, 1476LM

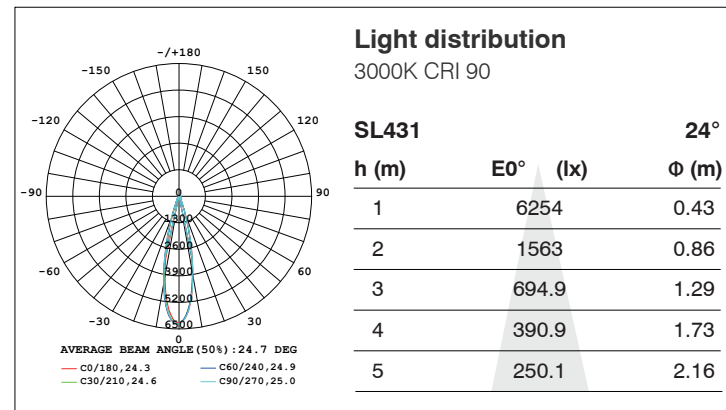


SL432

SL432, 20W, 1996LM

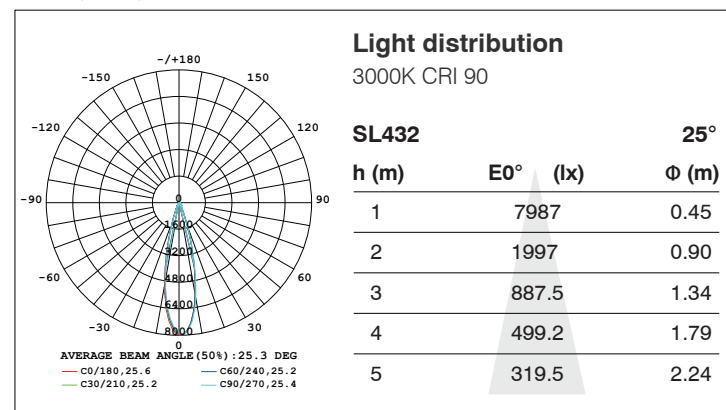


Control Type on request




Luminaire specifications

Model	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
SL430	10W	1027	3000K	24°	Ø20	Bridgelux	KEGU	20	90
SL431	15W	1476	3000K	24°	Ø20	Bridgelux	KEGU	20	90
SL432	20W	1996	3000K	24°	Ø20	Bridgelux	KEGU	20	90

Frame finishing color

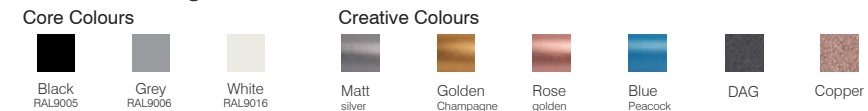

Color temperature range




Colour Rendering Index



Front Reflector color




Beam angle

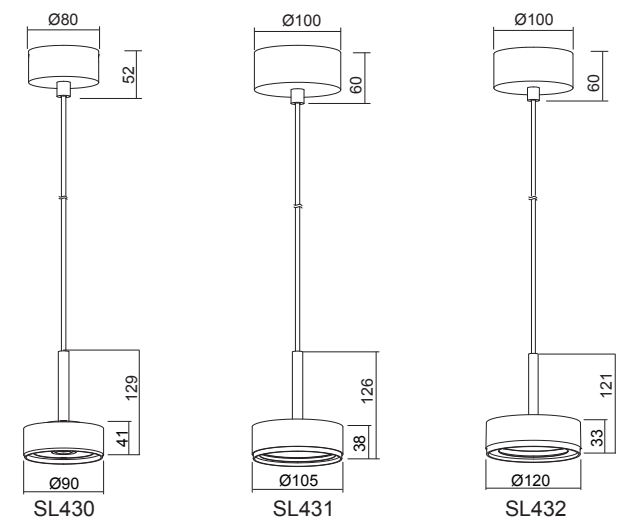

OSLO Series- Wall Mounted Light



WL675, 10W, 1027LM

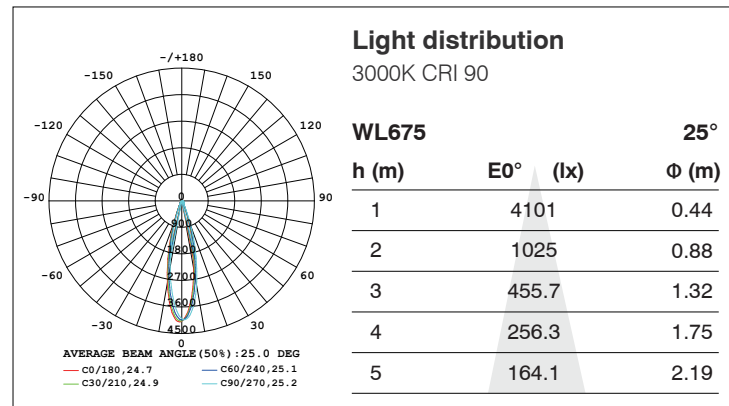


Control Type on request




Luminaire specifications

Model	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
WL675	10W	1027	3000K	24°	Ø20	Bridgelux	KEGU	20	90

Frame finishing color

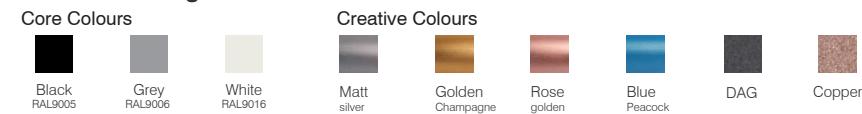

Color temperature range




Colour Rendering Index




Front Reflector color




Beam angle

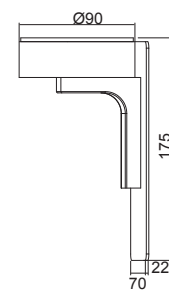


WL675

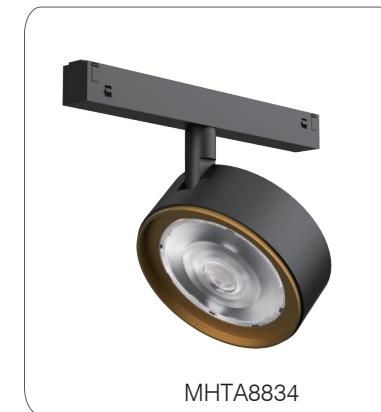

MHTA8834, 11W, 978LM

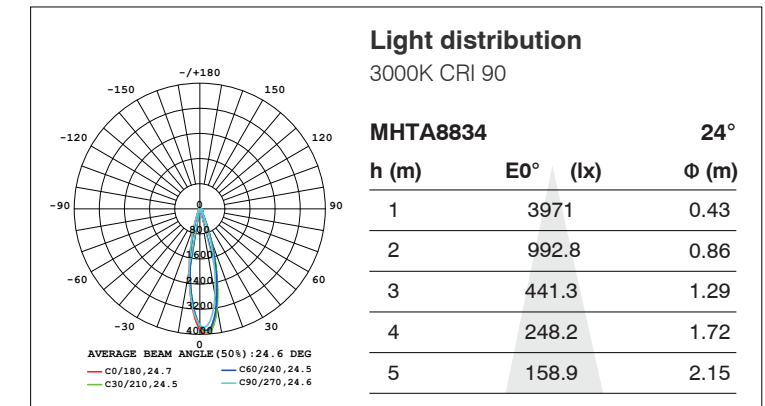


Control Type on request




Luminaire specifications

Model	Power	Lumen	CCT	BA.	Light Source	Driver	IP	CRI
MHTA8834	11W	978	3000K	24°	Bridgelux	KEGU	20	90


Frame finishing color

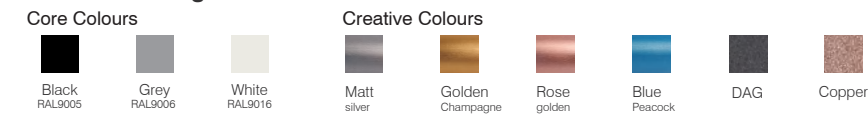

Color temperature range





Colour Rendering Index



Front Reflector color



Beam angle

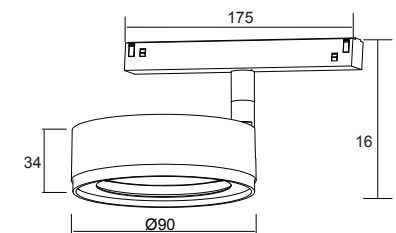

MHTA8834