

Ivory Series - Recessed Downlight



Light distribution
3000K CRI 90

h (m)	E0° (lx)	Φ (m)
1	2619	0.65
2	654.6	1.29
3	290.9	1.94
4	163.7	2.58
5	104.7	3.22

Light distribution
3000K CRI 90

h (m)	E0° (lx)	Φ (m)
1	2952	0.83
2	737.9	1.66
3	328.0	2.49
4	184.5	3.32
5	118.1	4.15

Light distribution
3000K CRI 90

h (m)	E0° (lx)	Φ (m)
1	6149	0.70
2	1537	1.41
3	683.2	2.11
4	384.3	2.81
5	246.0	3.52



Light distribution
3000K CRI 90

h (m)	E0° (lx)	Φ (m)
1	7995	0.72
2	1999	1.43
3	888.4	2.15
4	499.7	2.86
5	319.8	3.58

Light distribution
3000K CRI 90

h (m)	E0° (lx)	Φ (m)
1	8255	0.77
2	2064	1.54
3	917.3	2.31
4	516.0	3.09
5	330.2	3.86

Control Type



Luminaire specifications Die-casting Aluminum

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	IP	CRI
KT7216	12W	1356	3000K	36°	Bridgelux	AGT	20	90
KT7216A	15W	1725	3000K	45°	Bridgelux	AGT	20	90
KT7216B	25W	3125	3000K	39°	Bridgelux	AGT	20	90
KT7216C	40W	5000	3000K	39°	Bridgelux	AGT	20	90
KT7216D	45W	5760	3000K	42°	Bridgelux	AGT	20	90

Frame finishing colour


Core Colours




Creative Colours



Colour temperature range




Colour Rendering Index



Beam angle

KT7216/KT7216A/KT7216B/KT7216C/KT7216D

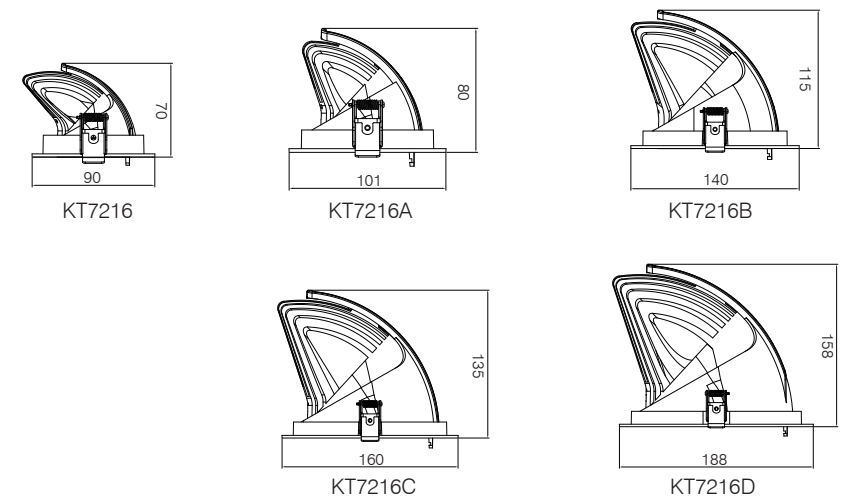

Remark: ● Technical information may change, please refer to the datasheet.