

# Less Series - Recessed Downlight



**Light distribution**  
3000K CRI 90

KT7387		25°	
h (m)	E0° (lx)	Φ (m)	
1	6702	0.49	
2	1676	0.90	
3	744.7	1.35	
4	418.9	1.80	
5	268.1	2.24	



**Light distribution**  
3000K CRI 90

KT7388		39°	
h (m)	E0° (lx)	Φ (m)	
1	6236	0.71	
2	1559	1.41	
3	692.9	2.15	
4	389.7	2.90	
5	249.4	3.53	



**Light distribution**  
3000K CRI 90

KT7389		38°	
h (m)	E0° (lx)	Φ (m)	
1	8432	0.69	
2	2108	1.37	
3	936.9	2.06	
4	527.0	2.80	
5	337.3	3.42	

**Control Type**




**Luminaire specifications** Die-casting Aluminum

Mode	Power	Lumen	CCT	BA.	Light Source	Driver	IP	CRI
KT7387	15W	2065	3000K	26°	Bridgelux	AGT	20	90
KT7388	20W	2700	3000K	39°	Bridgelux	AGT	20	90
KT7389	30W	4331	3000K	38°	Bridgelux	AGT	20	90

**Frame finishing colour**



**Colour temperature range**




**Colour Rendering Index**



**Beam angle**



**Front Ring Finishing color**

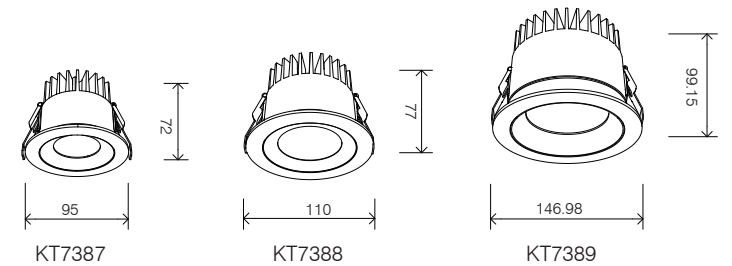

Remark: ● Technical information may change, please refer to the datasheet.

**KETAI**


Real time rendering



Transparent lighting  
Better effect



**KETAI**

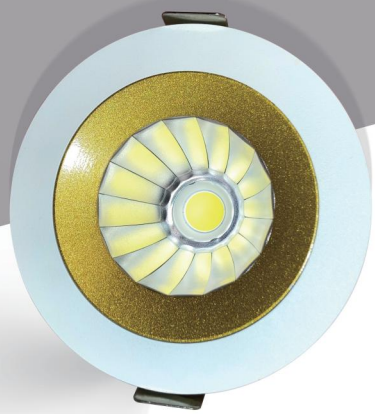

**KETAI**

