

Less Series - Recessed Downlight




Light distribution

3000K CRI 90

KT7390		35°
h (m)	E0° (lx)	Φ (m)
1	3386	0.63
2	846.6	1.26
3	376.3	1.90
4	211.7	2.53
5	135.5	3.16

Control Type



Luminaire specifications Die-casting Aluminum


Mode	Power	Lumen	CCT	BA.	Light Source	Driver	IP	CRI
KT7390	15W	1659	3000K	35°	Bridgelux	AGT	20	90

Frame finishing colour


Core Colours



Colour temperature range




Colour Rendering Index



Beam angle

KT7390

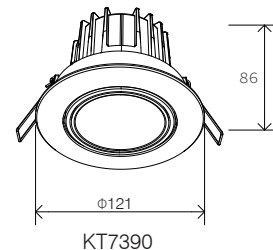

Remark: ● Technical information may change, please refer to the datasheet.

A01

KETAI[®]



LED DOWNLIGHT

Seeing light but not light, creating a sense of space




POWER
15W

LUMEN
1659LM

IP
20

KETAI[®]

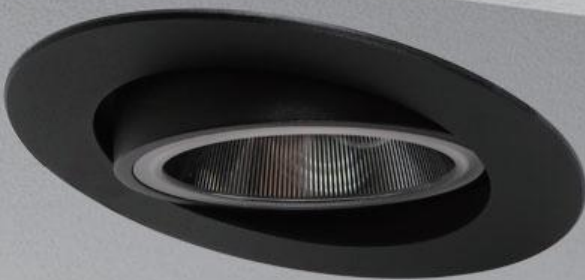

KETAI[®]



— Detail Display —

Adjustable Lighting Angle

Flexible Projection
Meet different irradiation needs



Rust proof buckle



Lens Optics


Good focusing effect;
Light refracts light more evenly
and softly



KETAI[®]

35 ° Comfort Beam Angle Professional wall washing effect

Improve the overall brightness of the space,
Helps to create a sense of hierarchy in home space.

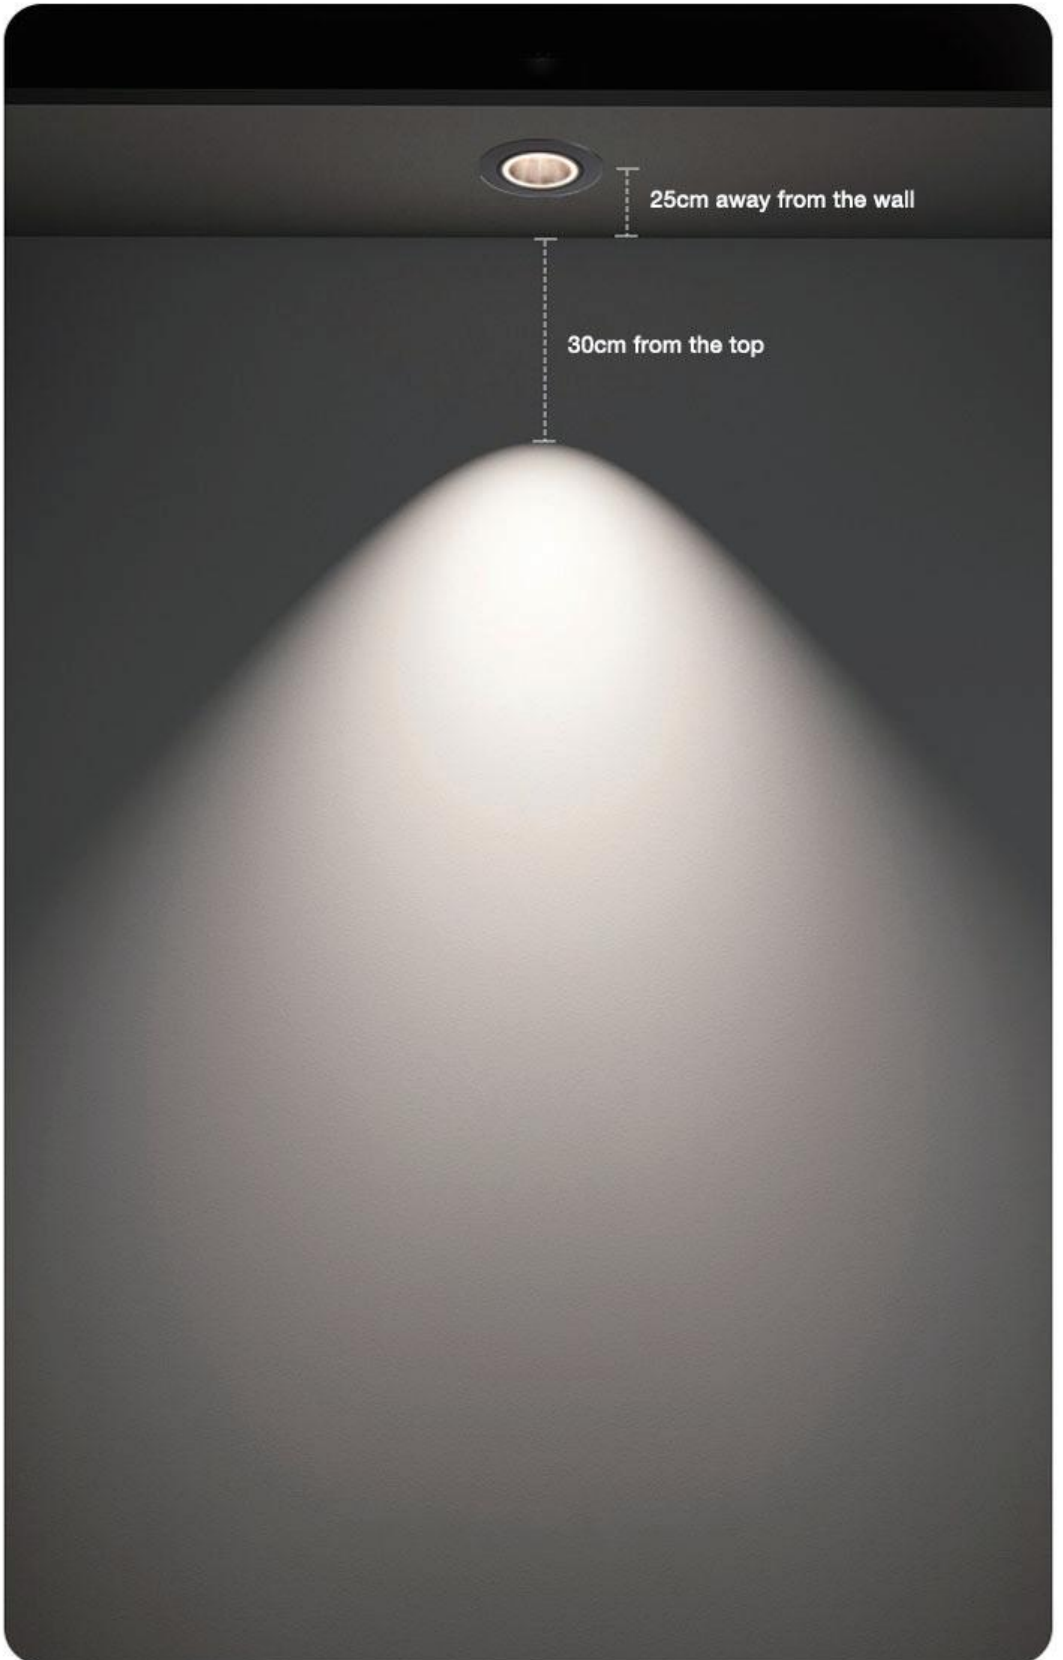


KETAI[®]



KETAI[®]



KETAI[®]

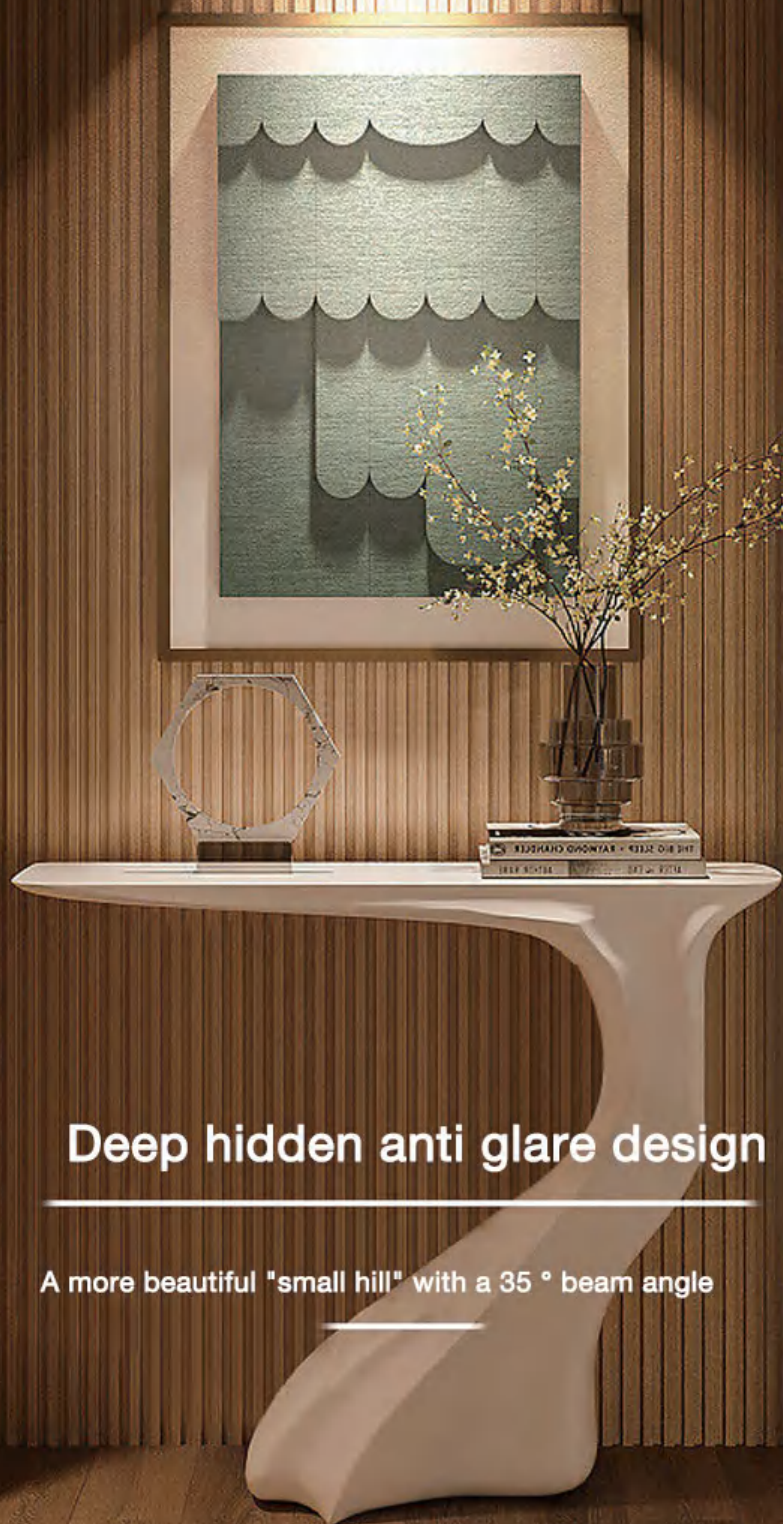

Deep hidden anti glare design

A more beautiful "small hill" with a 35 ° beam angle

KETAI[®]



