




Zoomer Series G3

Maintain Product Consistency To


Meet Different Application Scenarios

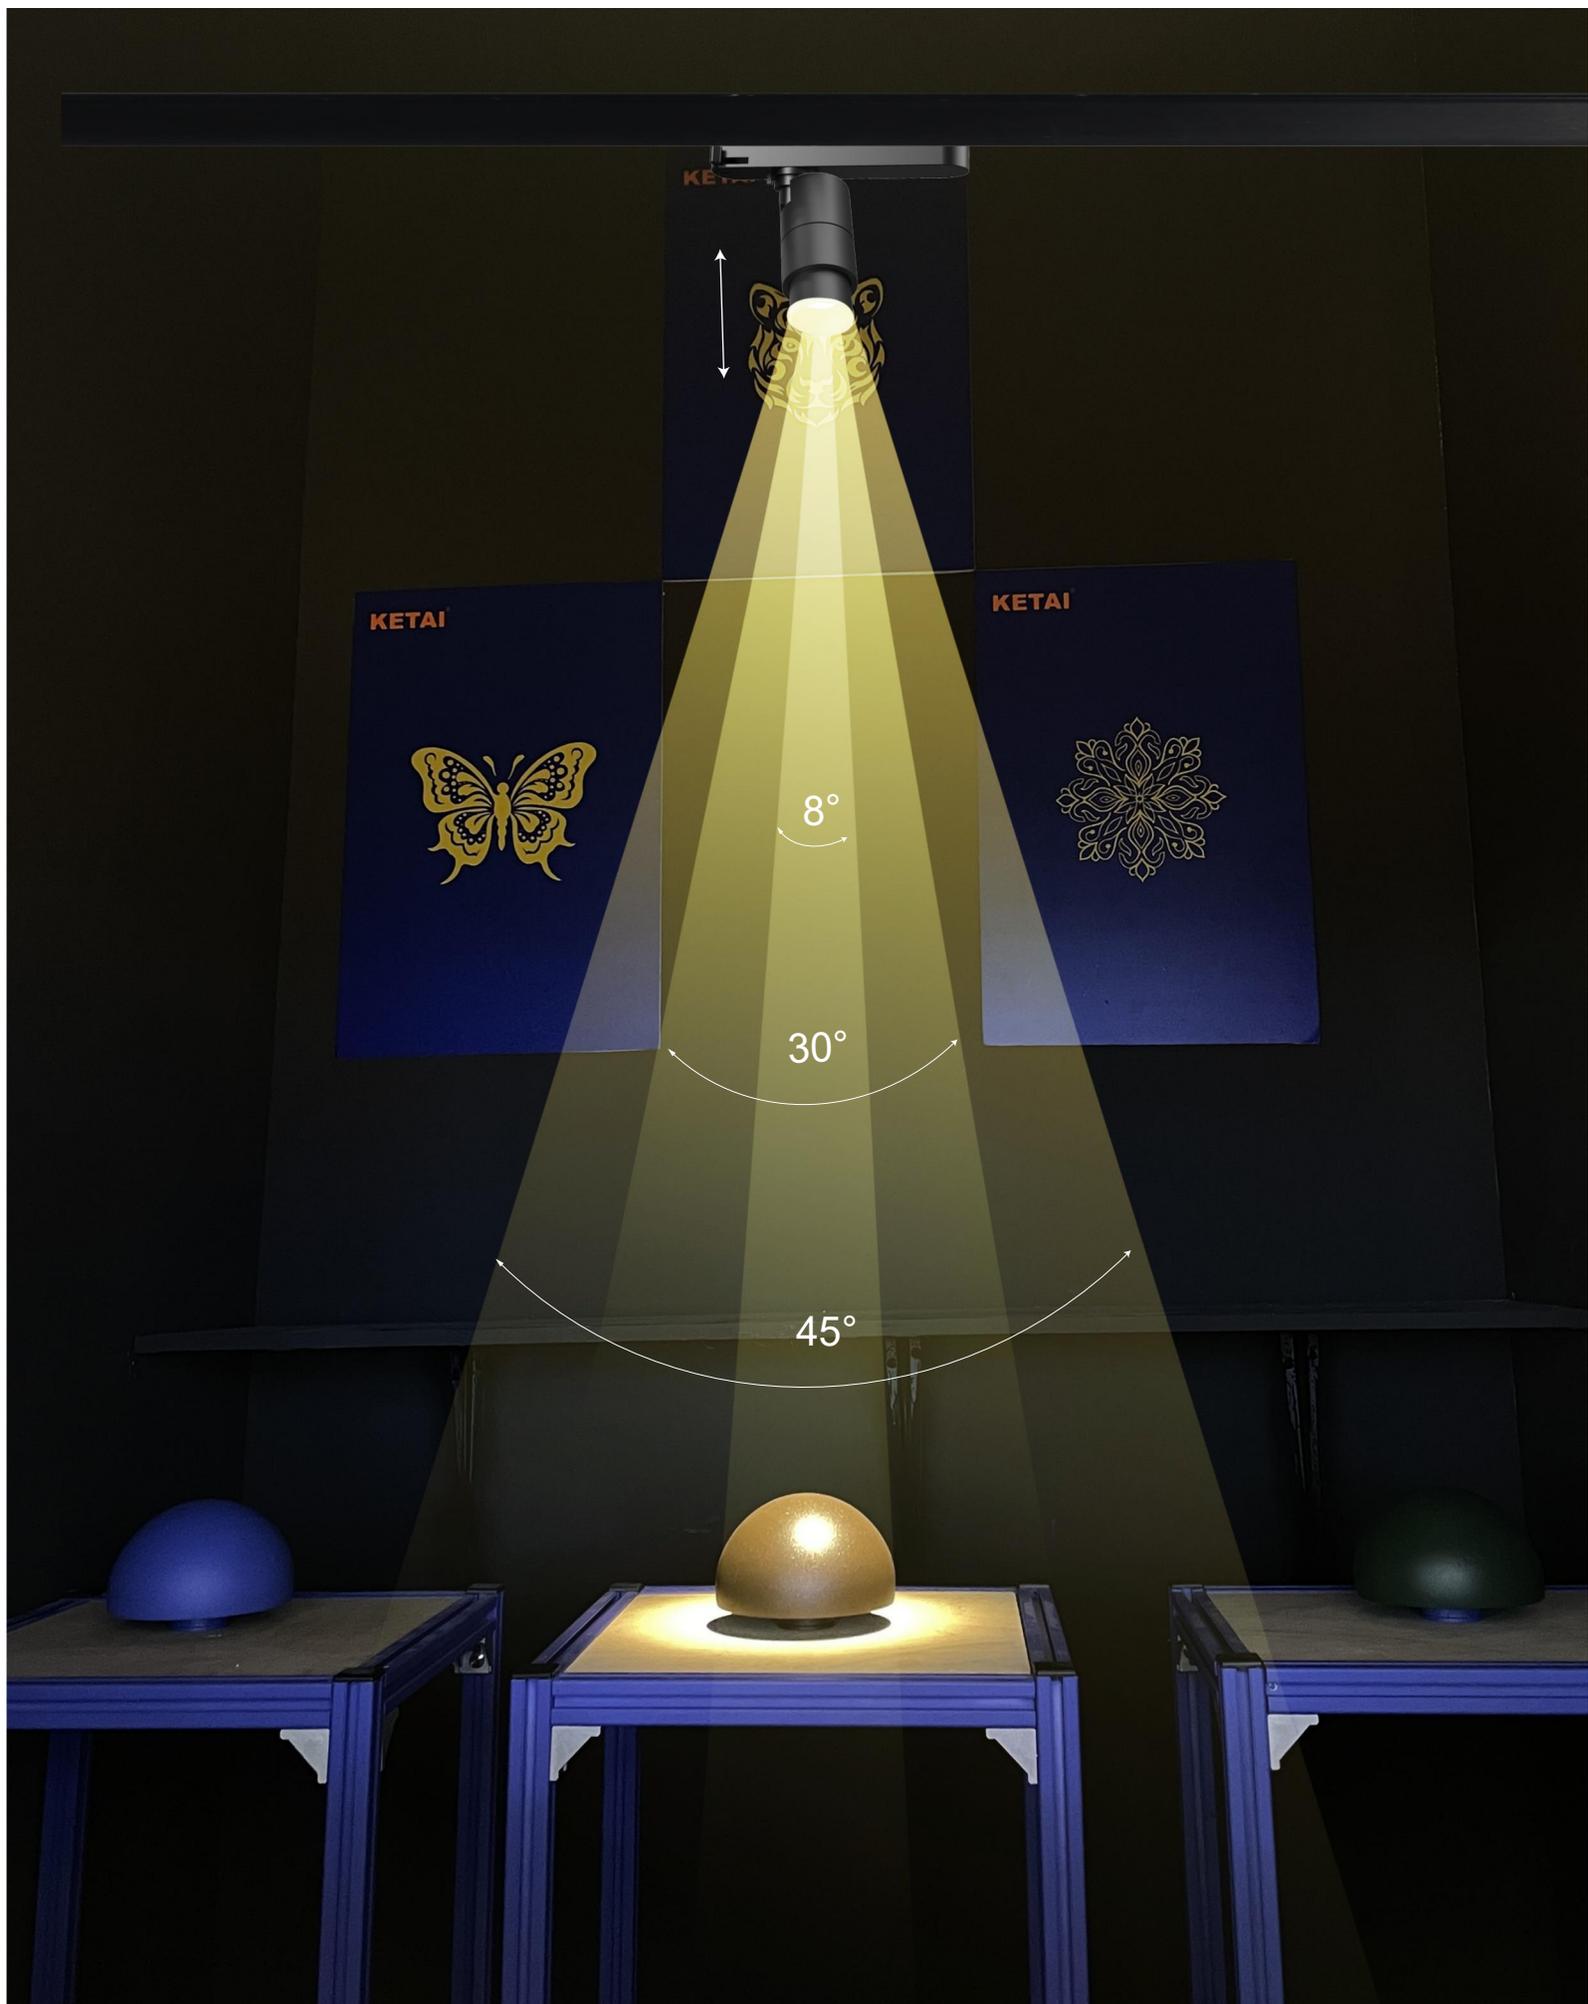

8° to 45° Focus



New color scheme

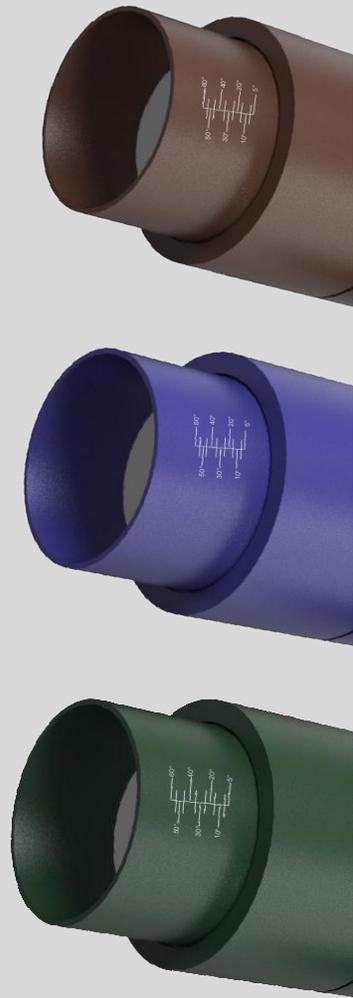

Available in customizable colors

Seamlessly blends functionality with aesthetics.



Black
RAL9005



Grey
RAL9006



White
RAL9016



Klein
Blue




Glass green
RAL6020



Sliver brown
RAL8028





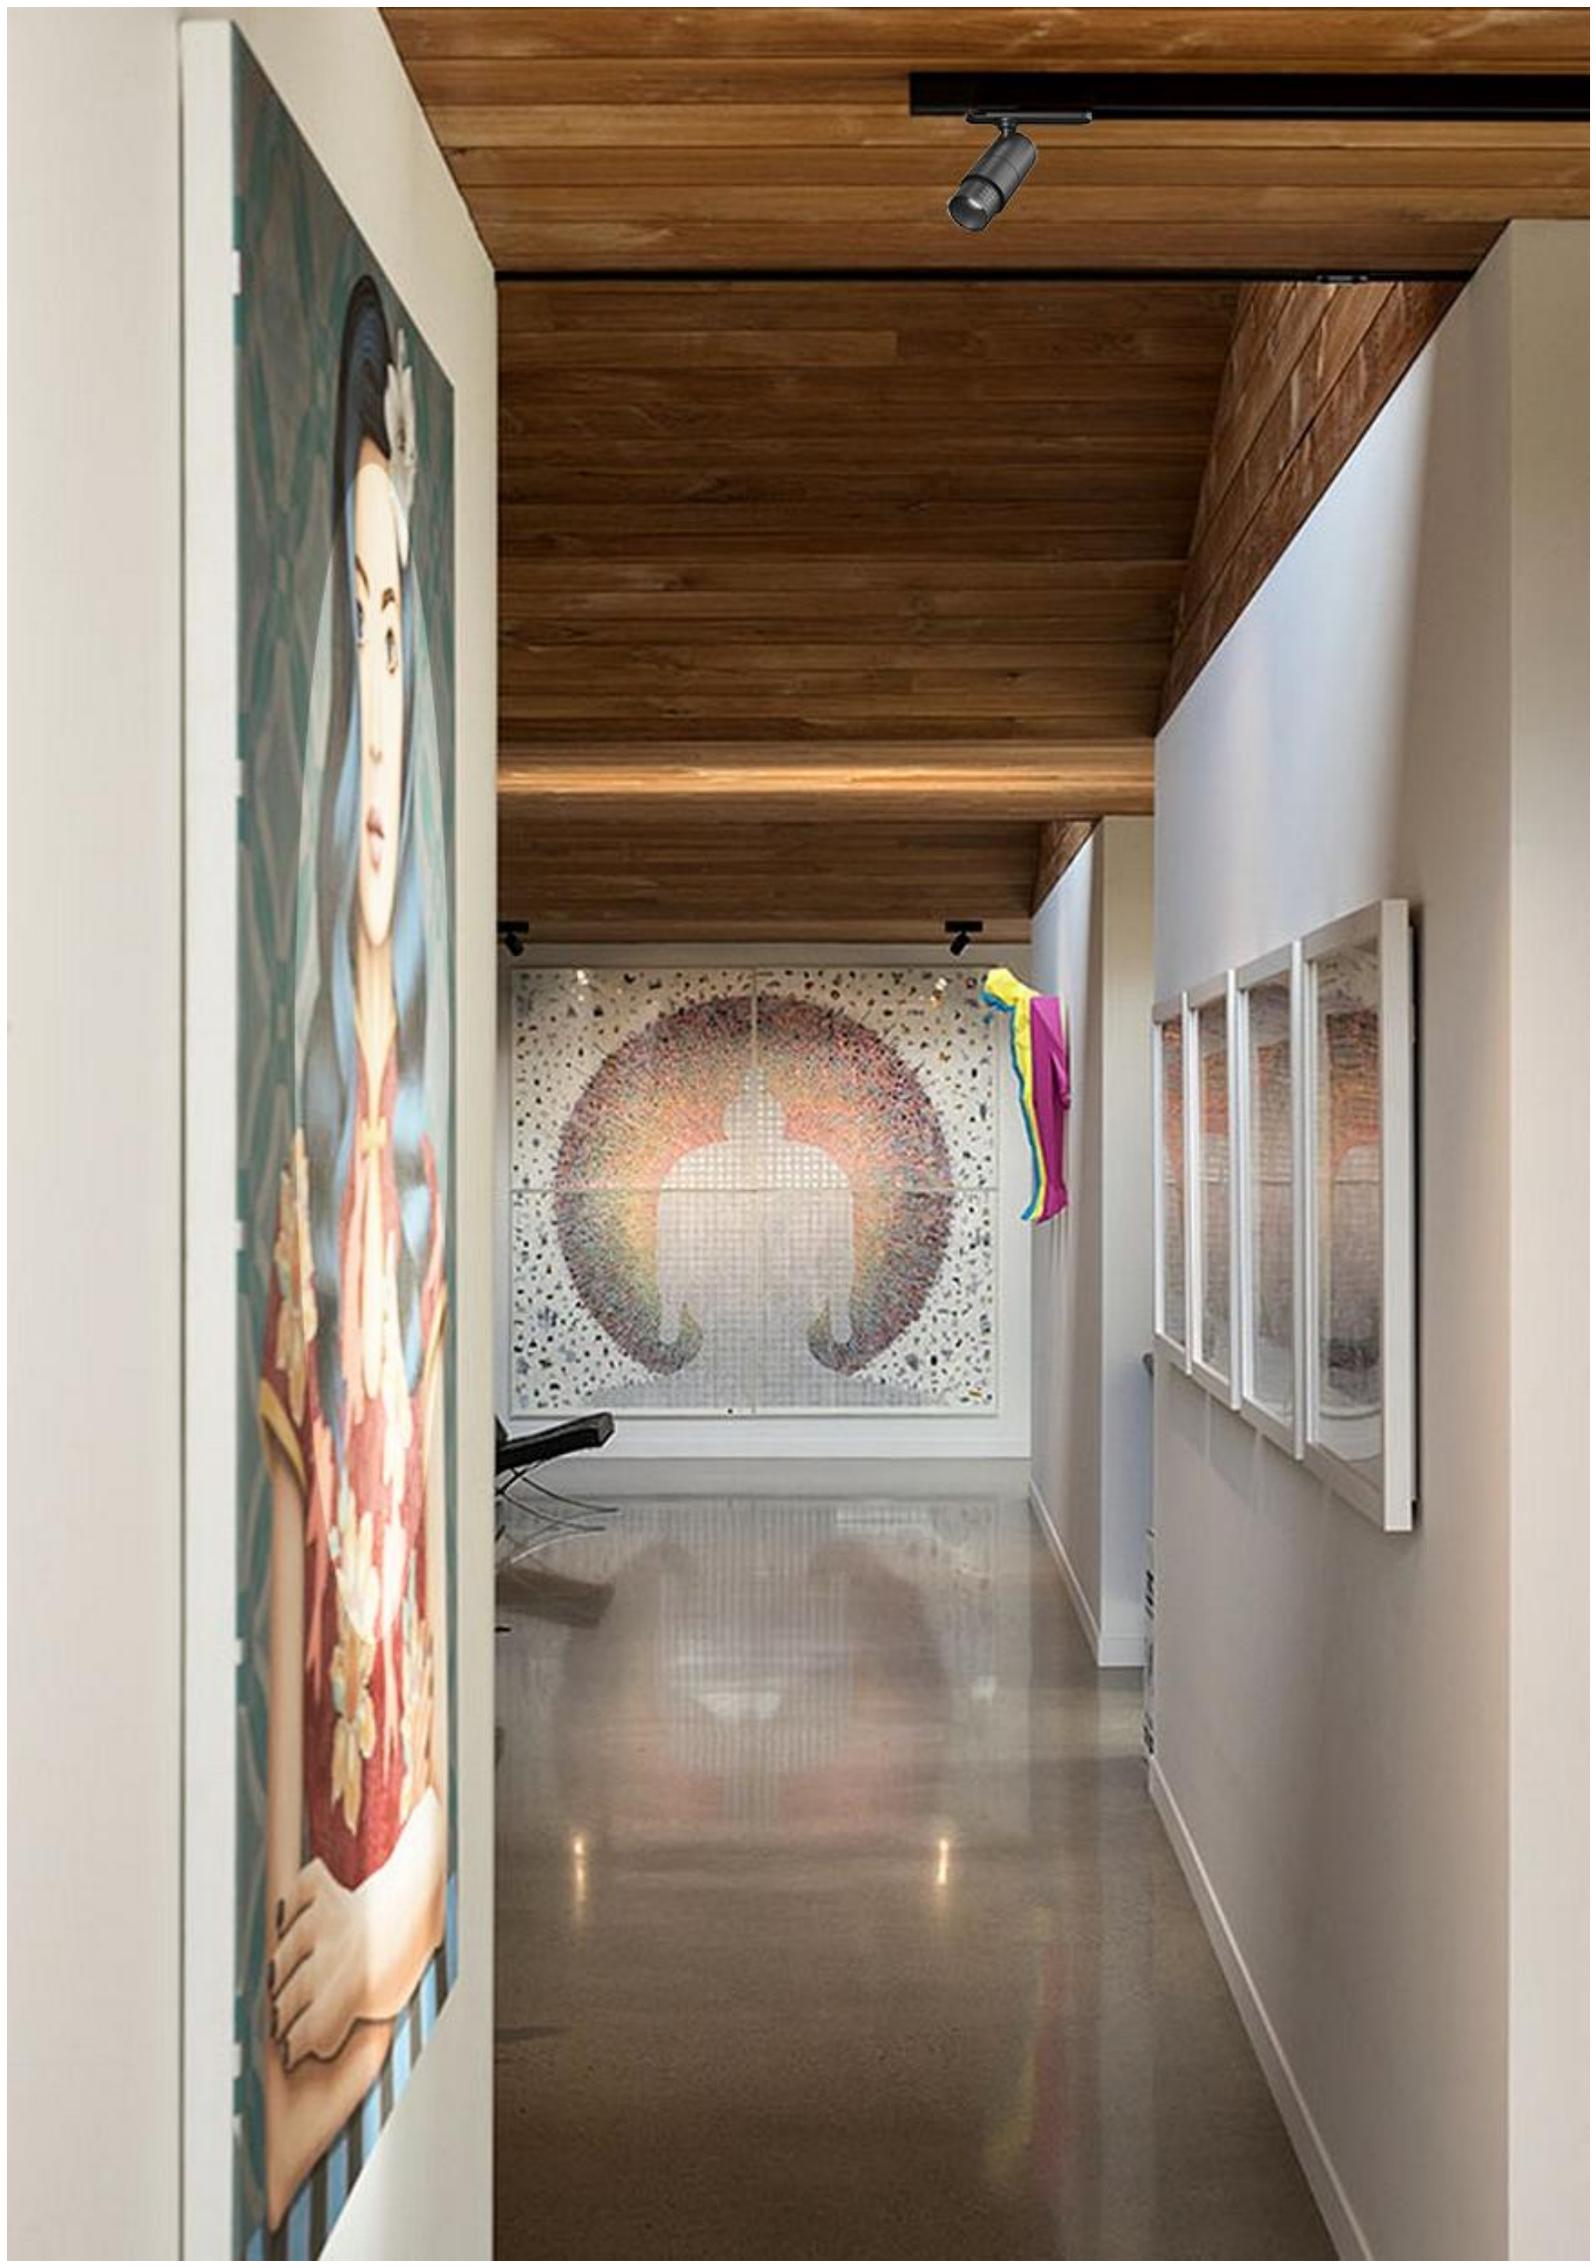

Zoomer Series G3 - Track Light



Light distribution

3000K CRI 90

MHT9029 3W		5°	
h (m)	E0° (lx)	Φ (m)	
1	5961	0.09	
2	1490	1.88	
3	662.4	2.81	
4	372.6	3.75	
5	238.5	4.69	

Light distribution

3000K CRI 90

MHT9029 3W		40°	
h (m)	E0° (lx)	Φ (m)	
1	211.5	0.71	
2	52.8	1.42	
3	23.5	2.13	
4	13.2	2.84	
5	8.5	3.55	



Light distribution

3000K CRI 90

MHT9028 7W		7°	
h (m)	E0° (lx)	Φ (m)	
1	7683	1.26	
2	1921	2.51	
3	853.7	3.77	
4	480.2	5.03	
5	307.3	6.30	

Light distribution

3000K CRI 90

MHT9028 7W		40°	
h (m)	E0° (lx)	Φ (m)	
1	632.9	0.71	
2	158.2	1.41	
3	70.3	2.12	
4	38.5	2.82	
5	25.3	3.53	



Light distribution

2700K CRI 90

MHT8837S 15W		8°	
h (m)	E0° (lx)	Φ (m)	
1	7891	1.23	
2	1973	2.47	
3	876.8	3.71	
4	493.2	4.95	
5	315.7	6.19	

Light distribution

2700K CRI 90

MHT8837S 15W		45°	
h (m)	E0° (lx)	Φ (m)	
1	996.6	0.81	
2	249.2	1.61	
3	110.7	2.42	
4	62.2	3.23	
5	39.8	4.03	



Light distribution

2700K CRI 90

MHT8837A 15W		8°	
h (m)	E0° (lx)	Φ (m)	
1	7891	1.24	
2	1973	2.45	
3	876.8	3.72	
4	493.2	4.95	
5	315.7	6.19	

Light distribution

2700K CRI 90

MHT8837A 15W		45°	
h (m)	E0° (lx)	Φ (m)	
1	996.6	0.81	
2	249.2	1.61	
3	110.7	2.42	
4	62.2	3.23	
5	39.8	4.03	



Control Type on request



Luminaire specifications

Model	Power	Lumen	CCT	BA.	Light Source	Driver	IP	CRI
MHT9029	3W	67 - 73	3000K	5° - 40°	Bridgelux	KEGU	20	90
MHT9028	7W	146 - 213	3000K	7° - 40°	Bridgelux	KEGU	20	90
MHT8837S	15W	214 - 610	3000K	8° - 45°	Bridgelux	KEGU	20	90
MHT8837	15W	214 - 610	3000K	8° - 45°	Bridgelux	KEGU	20	90

Frame finishing colour

Core Colours



Colour temperature range



Colour Rendering Index



CRI90

Beam angle

