



NEW

Muse

25° - 65°

Energy Saving
120lm/W

Free Zoomerabe
Adjustable by rotating the front ring

Great solution to reduce regular inventory



360° Rotatable



90° Up & Down

Retractable and adjustable
Achieve focusing and diffusing

25°

35°

45°

65°



1-10V Dimmable By Rotating Rod



CCT Changeable By Dip

2700K - 5000K

2700K - 4000K

Power Adjustable By Switch

Min 12W - Max 30W

Discover how our Muse can transform your inventory management.


A close-up, low-angle shot of a black office chair. The top part of the chair's backrest is visible, showing a control panel with a dial and a lever. The seat is in the foreground, angled downwards. The background is a light, textured surface.

Heat Dissipation & Durability

Efficient heat dissipation structure with a lifespan up to 50,000 hours




Museum Application

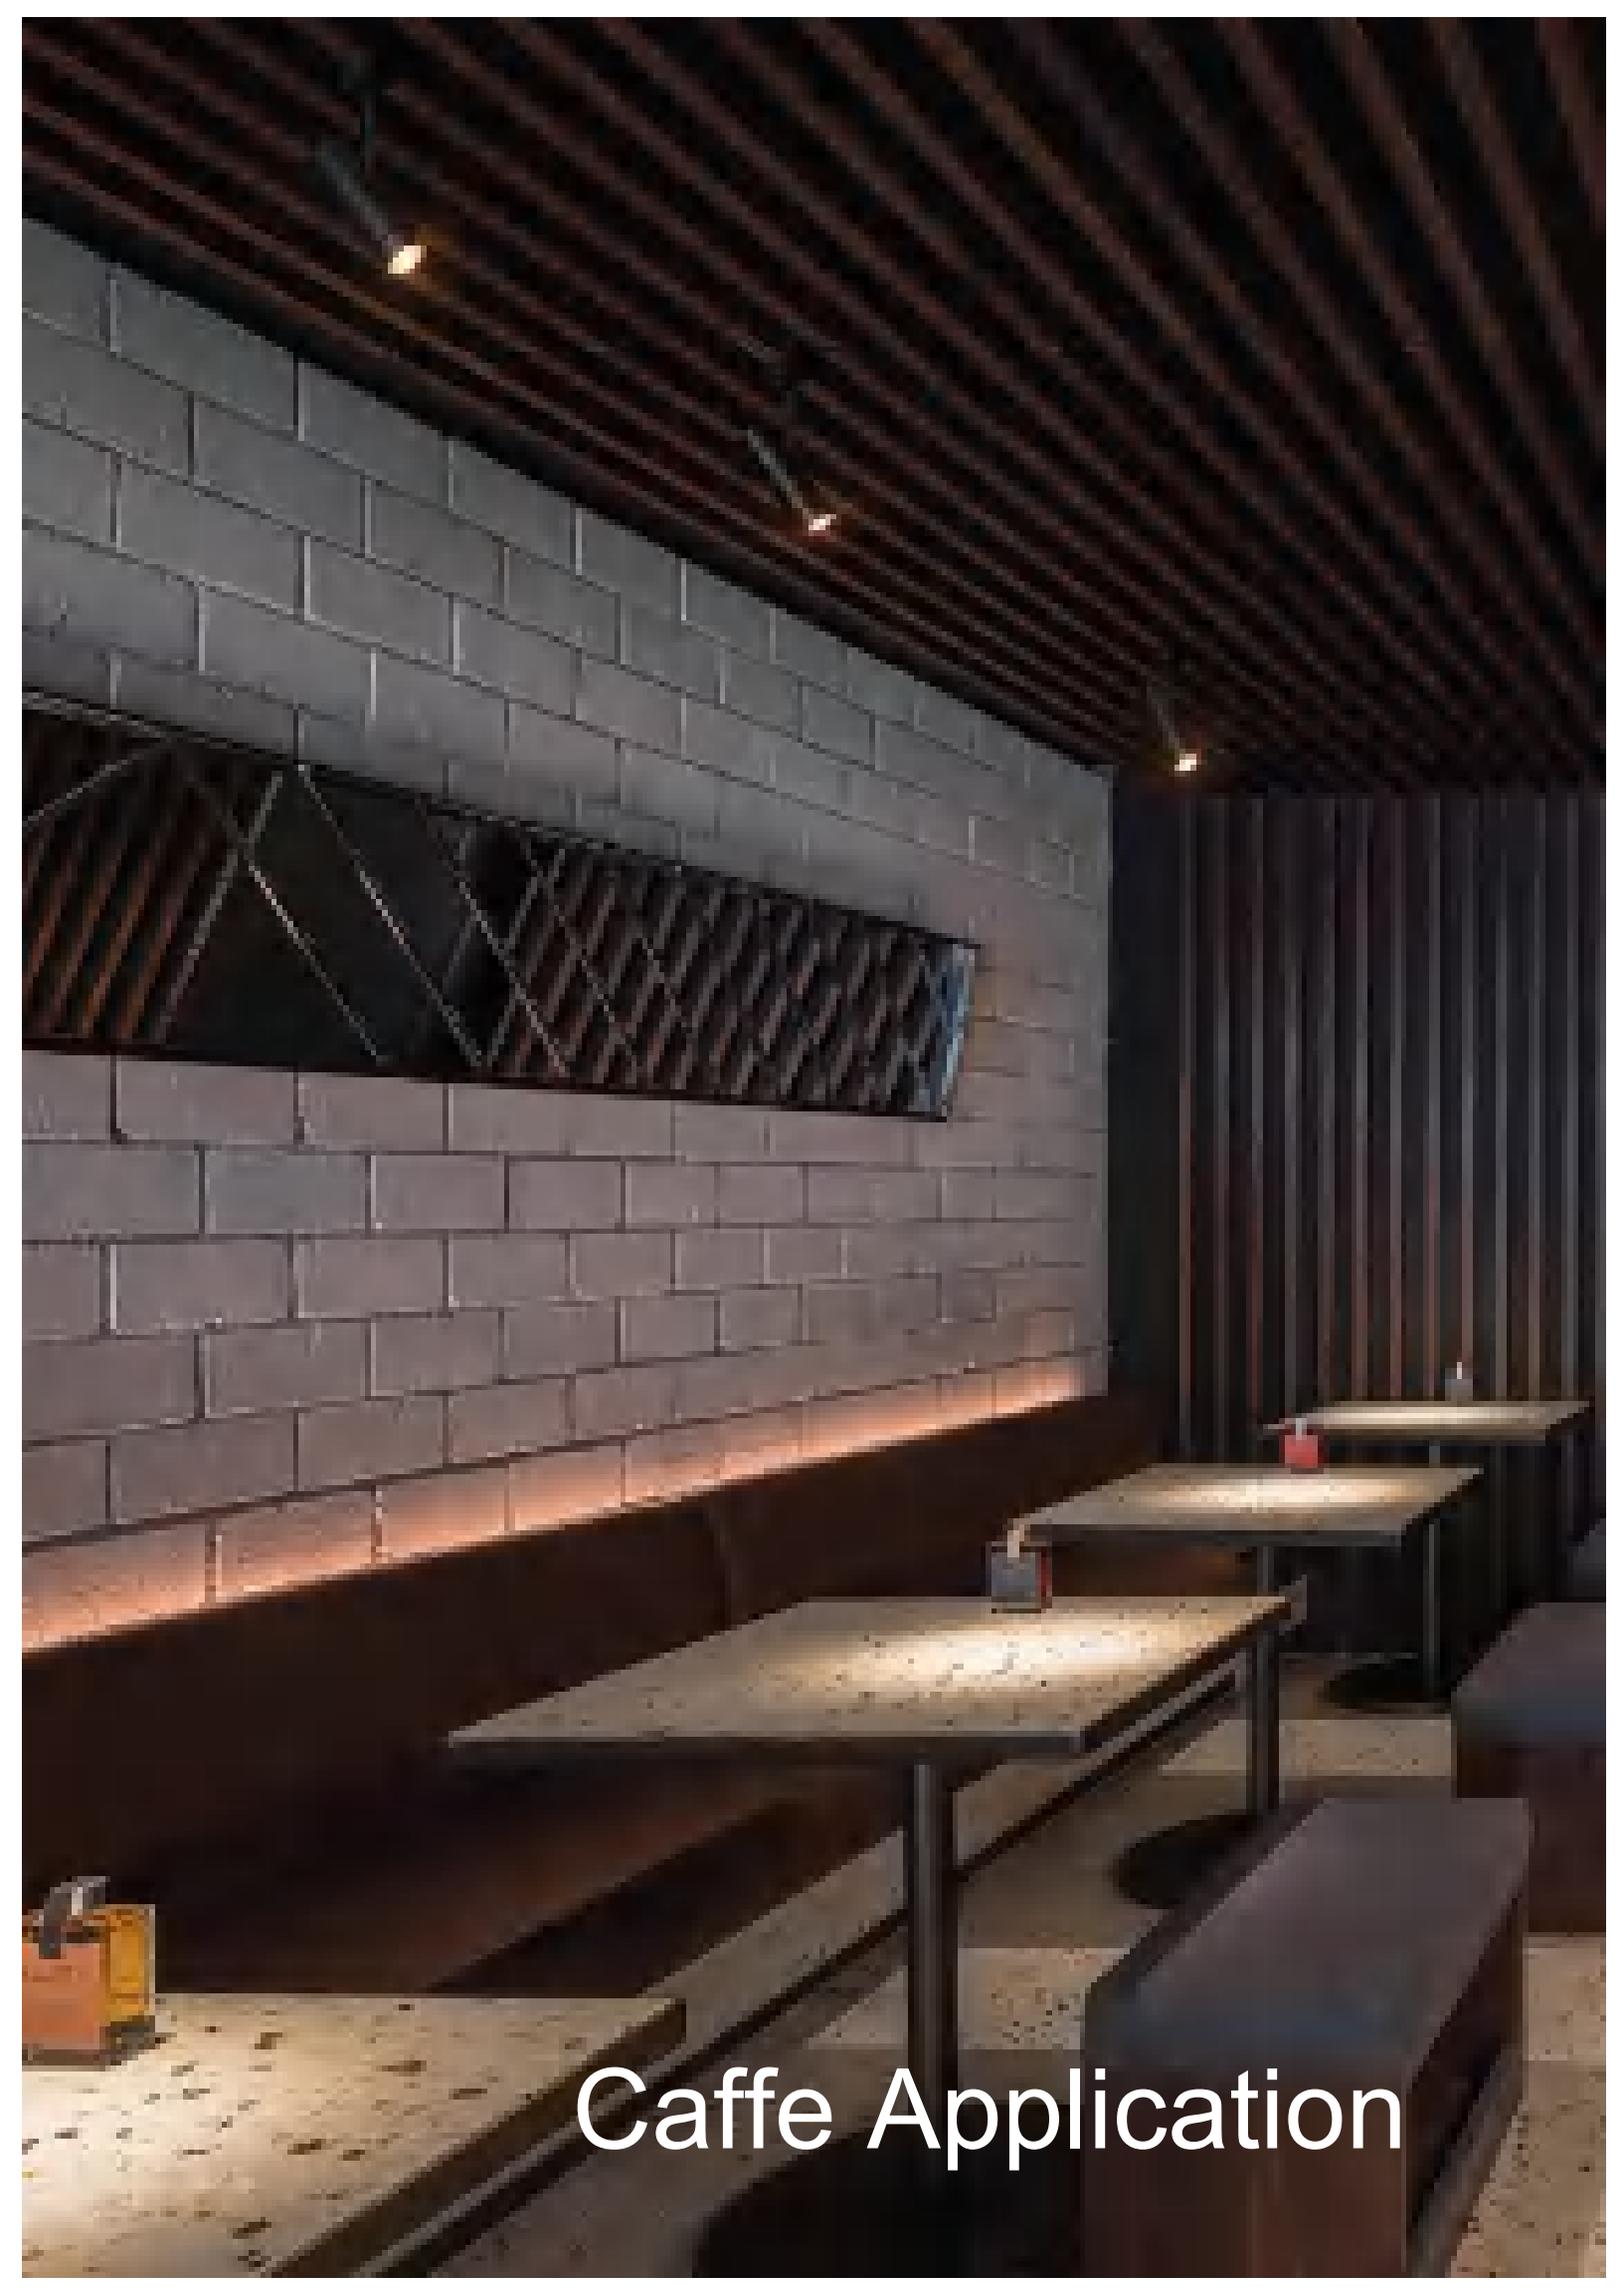

Caffe Application

Muse - Track Light

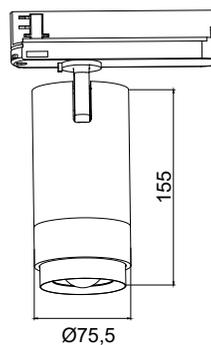

MHT9020

Light distribution

2700K CRI 90

MHT9020 28W		25°	
h (m)	E0° (lx)	Φ (m)	
1	5462	0.45	
2	1366	0.89	
3	606.9	1.34	
4	341.4	1.79	
5	218.5	2.24	

Light distribution

3500K CRI 90

MHT9020 28W		25°	
h (m)	E0° (lx)	Φ (m)	
1	6344	0.45	
2	1586	0.90	
3	704.9	1.36	
4	396.5	1.81	
5	253.8	2.26	

Light distribution

5000K CRI 90

MHT9020 28W		25°	
h (m)	E0° (lx)	Φ (m)	
1	6631	0.45	
2	1658	0.89	
3	737	1.34	
4	414.6	1.78	
5	265.3	2.23	

Light distribution

2700K CRI 90

MHT9020 28W		65°	
h (m)	E0° (lx)	Φ (m)	
1	2036	0.61	
2	509	1.23	
3	226.2	1.84	
4	127.3	2.45	
5	81.4	3.06	

Light distribution

3500K CRI 90

MHT9020 28W		65°	
h (m)	E0° (lx)	Φ (m)	
1	2431	1.29	
2	607.7	2.59	
3	270.1	3.88	
4	115.9	5.18	
5	97.2	6.47	

Light distribution

5000K CRI 90

MHT9020 28W		65°	
h (m)	E0° (lx)	Φ (m)	
1	2614	1.35	
2	653.4	2.70	
3	290.4	4.04	
4	163.3	5.39	
5	104.5	6.74	

Control Type on request

- On-off
- 0-10V
- Phase-Cut
- DALI
- Casambi



Luminaire specifications

Model	Power	Lumen	CCT	BA.	Light Source	Driver	IP	CRI
MHT9020	28W	1618	2700K	25°	Bridgelux	KGP	20	90
MHT9020	28W	2629	2700K	65°	Bridgelux	KGP	20	90
MHT9020	28W	1912	3000K	25°	Bridgelux	KGP	20	90
MHT9020	28W	2950	3000K	65°	Bridgelux	KGP	20	90
MHT9020	28W	1965	5000K	25°	Bridgelux	KGP	20	90
MHT9020	28W	3338	5000K	65°	Bridgelux	KGP	20	90

Frame finishing colour

Core Colours



Colour Rendering Index



Beam angle

MHT9020



Colour temperature range



Front Reflector color

