

KETAI[®]

DOWNLIGHT

XK SERIES

HIGH EFFICIENCY SERIALIZED SMD DOWNLIGHTS

CUTOUT SIZE FROM DIA.68MM TO DIA.210MM





Reflector Options



Chrome Black



White



Black



Bright Silver



Matte White









Matte Black








XK SERIES - Recessed Downlight



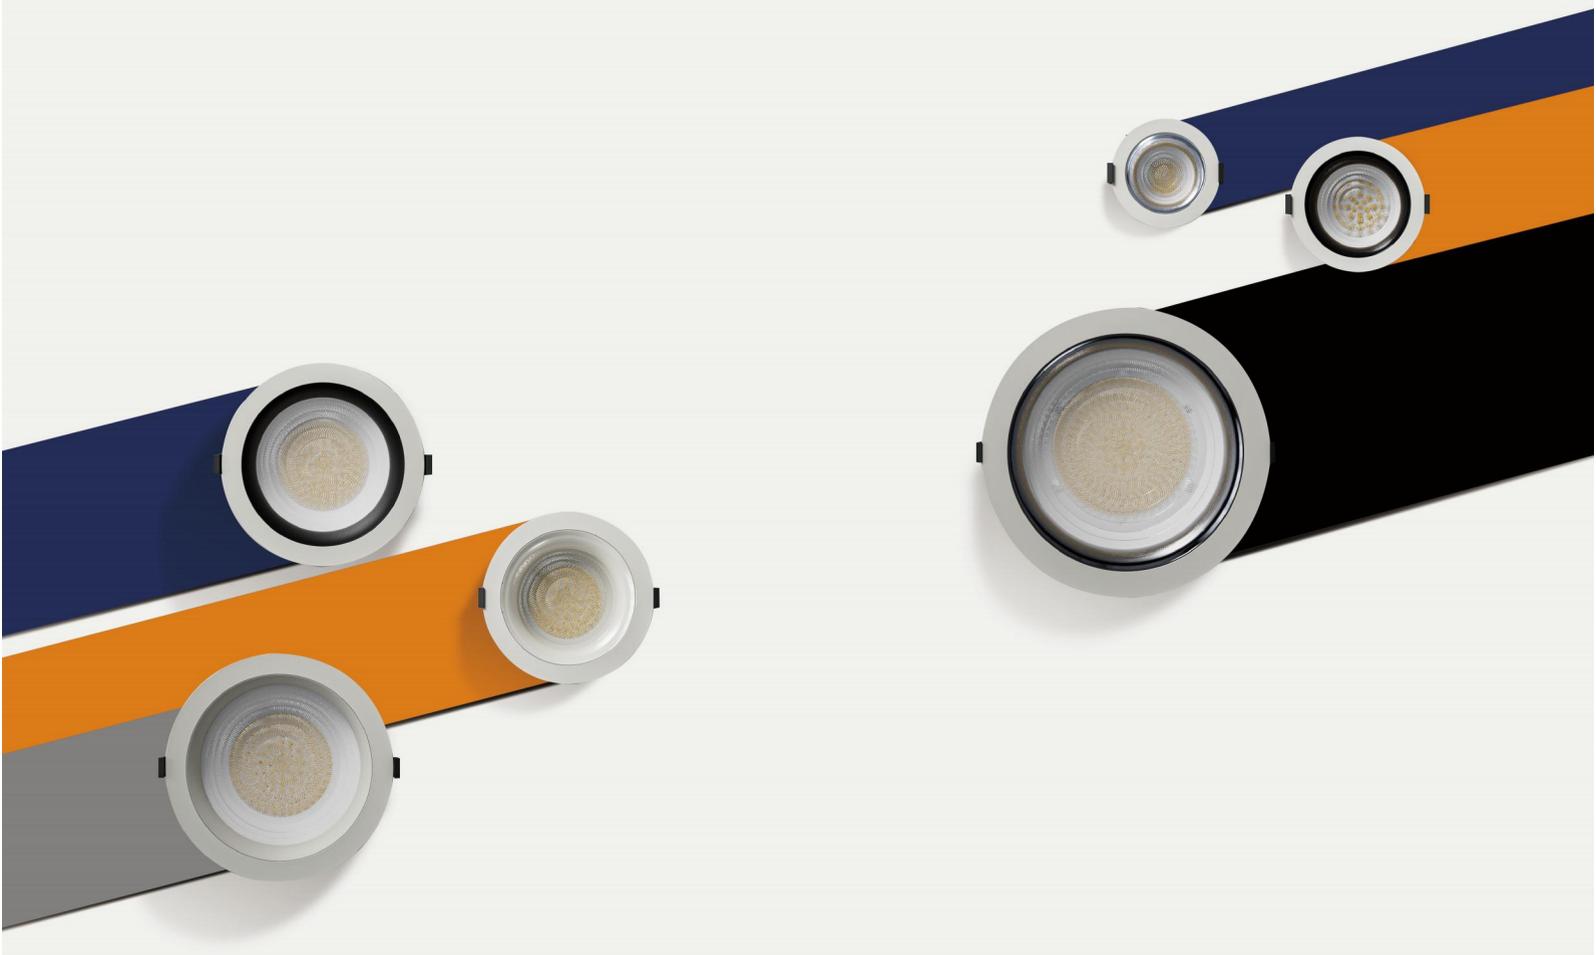

Control Type on request

- On-off
- 0-10V
- Phase-Cut
- DALI
- Casambi

Luminaire specifications

Model	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
KT7508	12W	1261	3000K	60°	Ø68-80	Bridgelux	KEGU	20	90
KT7509	20W	1682	3000K	75°	Ø90-100	Bridgelux	KEGU	20	90
KT7510	30W	2224	3000K	80°	Ø115-120	Bridgelux	KEGU	20	90
KT7511	35W	3147	3000K	90°	Ø140-150	Bridgelux	KEGU	20	90
KT7512	40W	3708	3000K	90°	Ø160-170	Bridgelux	KEGU	20	90
KT7513	45W	4402	3000K	95°	Ø200-210	Bridgelux	KEGU	20	90

Frame finishing colour

Core Colours




Front Reflector color



Colour temperature range



Beam angle



Colour Rendering Index

