


NEW





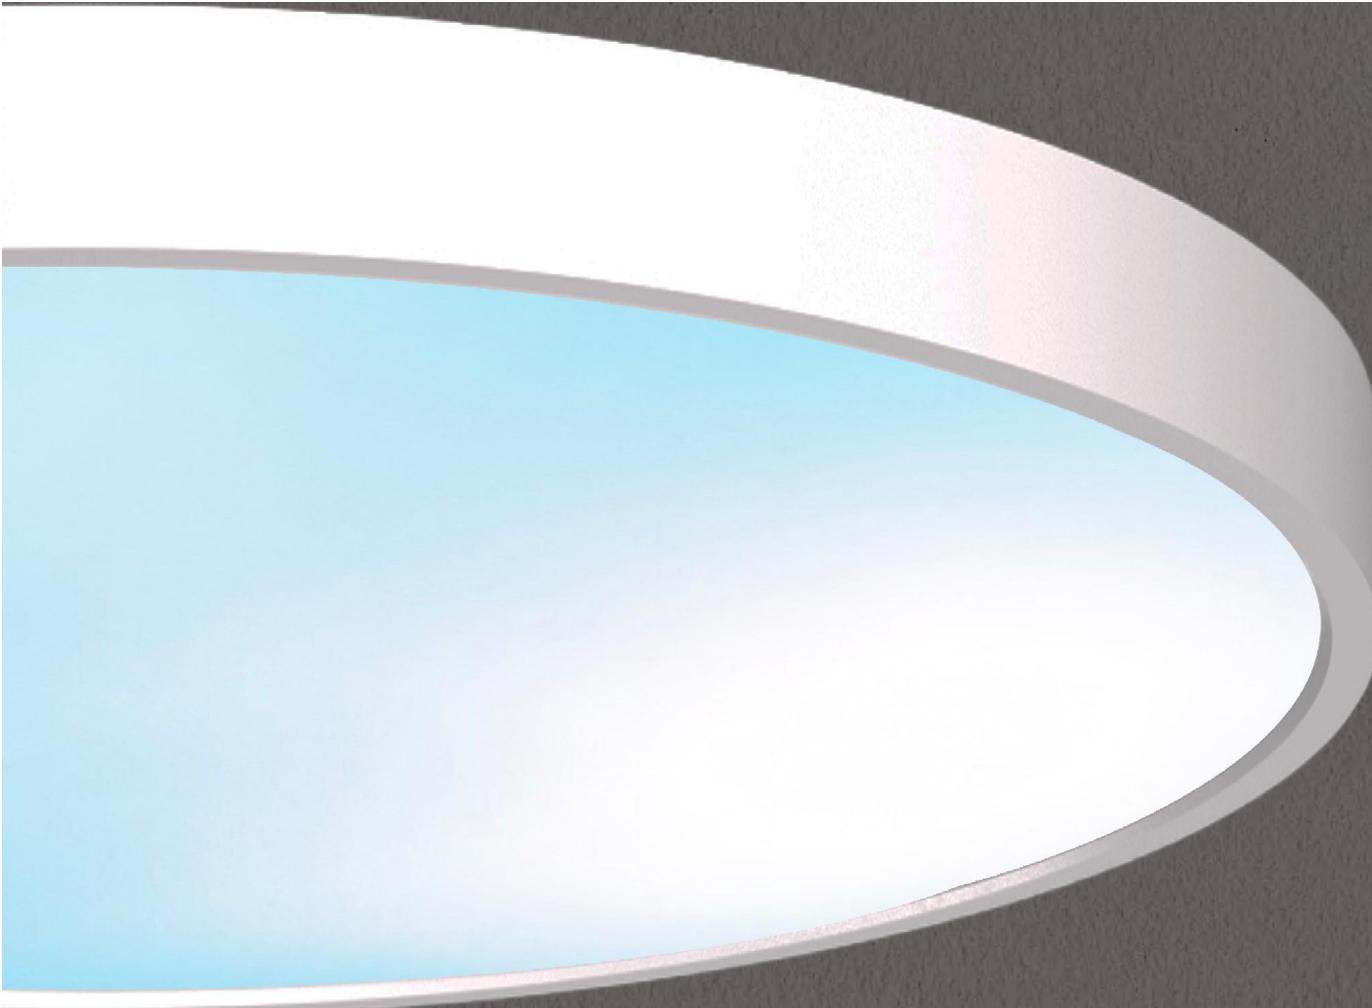

REMOTE CONTROL FOR PRECISE LIGHT COLOR CONTROL

Switch ←

← CCT



Brightness →

Six color options





DYNAMICS



NIGHT LIGHT




DAWN



CLEAR SKY



BLUE SKY



SUNSET GLOW



Precise dimming
flexible matching


Zero deviation, restoring the true color of the original body



Three sizes. multiple choices



High quality ABS frame

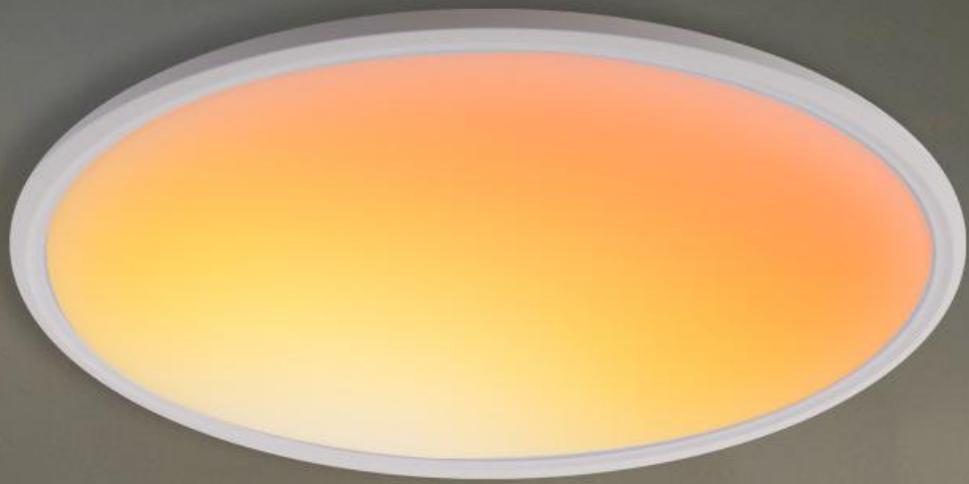

Cinco - Surface Mounted Light



Light distribution

3000K CRI 90

XD9037			113°
h (m)	E0° (lx)		Φ (m)
1	446.3		3.0
2	111.6		5.9
3	49.6		8.9
4	27.9		11.8
5	17.9		14.8



Light distribution

3000K CRI 90

XD9038			114°
h (m)	E0° (lx)		Φ (m)
1	1324		3.0
2	331		5.9
3	147.1		8.9
4	82.7		11.8
5	53		14.8



Light distribution

3000K CRI 90

XD9039			114°
h (m)	E0° (lx)		Φ (m)
1	1337		3.0
2	334.4		6.0
3	148.6		9.0
4	83.6		11.9
5	53.5		14.9

220V
240V



Control Type on request

- On-off
- 0-10V
- Phase-Cut
- DALI
- Casambi

Luminaire specifications

Model	Power	Lumen	CCT	BA.	Light Source	Driver	IP	CRI
XD9037	20W	1232	3000K	114°	KR3535	KGP	20	90
XD9038	50W	3736	3000K	114°	KR3535	KGP	20	90
XD9039	55W	3431	3000K	114°	KR3535	KGP	20	90

Frame finishing colour

Core Colours

- Black
RAL9005
- Grey
RAL9006
- White
RAL9016

Creative Colours

- Matt Silver
- Golden Champagne
- Rose Golden
- Blue Peacock
- DAG
- Copper

Colour temperature range

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 6000K
- Tuneable White

Colour Rendering Index


- CRI90
- CRI80

Front Reflector color


- Black
RAL9005
- White
RAL9016

Beam angle


XD9034/XD9035/XD9036/XD9037/XD9038/XD9039




XD9034




XD9037




XD9035

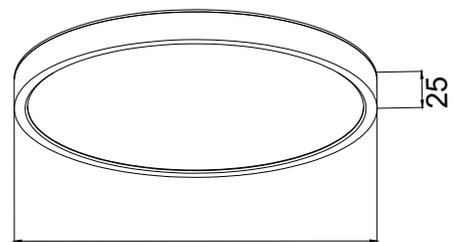

XD9038



XD9036

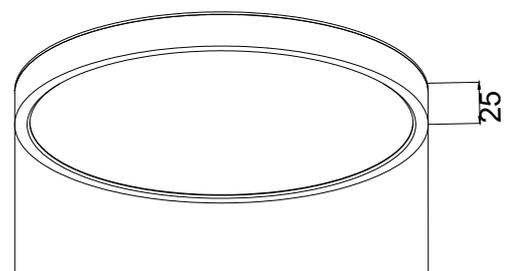

XD9039