

## OUTDOOR LIGHT

### LED garden light

Light emission on one side

CNC aluminium  
profile aluminum and safety glass

LED color temperature: 2200K, 2700K, 3000K

Finish color

■ RAL 9005 ■ RAL 7016 ■ RAL 6020 ■ RAL 8028

Standing resolute against the elements, it merges unwavering stability with graceful adaptability. Anchored by a robust heavy-duty ground spike, it installs instantly anywhere while its 360° adjustable head pivots effortlessly to defy wind, rain, or terrain—much like an umbrella steadfastly shielding its space from nature's whims.

The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires. For the products that you are interested in, you could find there all the needed information: power, luminous flux, CCT, CRI, etc.



LED III DC48V IP65

	W	LUM	CCT	BEAM	CRI	L	W	H
FL980	8	569	3000K	/	80	140	18	1000

## OUTDOOR LIGHT

### LED garden light

Light emission on one side

CNC aluminium  
profile aluminum and safety glass


LED color temperature: 2200K, 2700K, 3000K

Finish color

RAL 9005
  RAL 7016
  RAL 6020
  RAL 8028


Pillar B is designed to illuminate the pathways and garden borders with precision and style. Featuring a distinctive-slanted beam projection, this light casts a focused, downward glow exactly where needed, minimizing glare and light pollution.

The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires. For the products that you are interested in, you could find there all the needed information: power, luminous flux, CCT, CRI, etc.

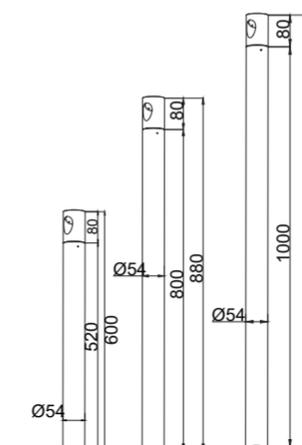

LED
⏚
AC 220-240 V
IP65

	W	LUM	CCT	BEAM	CRI	L	W	H
FL979-520	4	163	3000K	/	80	380	54	54
FL979-800	4	163	3000K	/	80	380	54	54
FL979-1000	4	163	3000K	/	80	380	54	54



## OUTDOOR LIGHT

### LED Garden Light

Light emission on one side

CNC aluminium  
profile aluminum and safety glass

LED color temperature: 2200K, 2700K, 3000K

Finish color


■ RAL 9005 ■ RAL 7016 ■ RAL 6020 ■ RAL 8028

Engineered for targeted brilliance, it features a unique downward-direction circular beam, casting a perfect halo of light around its base. The standout feature is its fully adjustable lamp head. Designed for ultimate versatility, the head swivels smoothly through 360 degrees, allowing you to precisely direct the light circle exactly where it's needed.

The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires. For the products that you are interested in, you could find there all the needed information: power, luminous flux, CCT, CRI, etc.

LED  AC 220-240 V IP65

	W	LUM	CCT	BEAM	CRI	L	W	H
<b>FL985-760</b>	9	382	3000K	/	80	1000	140	24
<b>FL985-1600</b>	9	382	3000K	/	80	1000	140	24

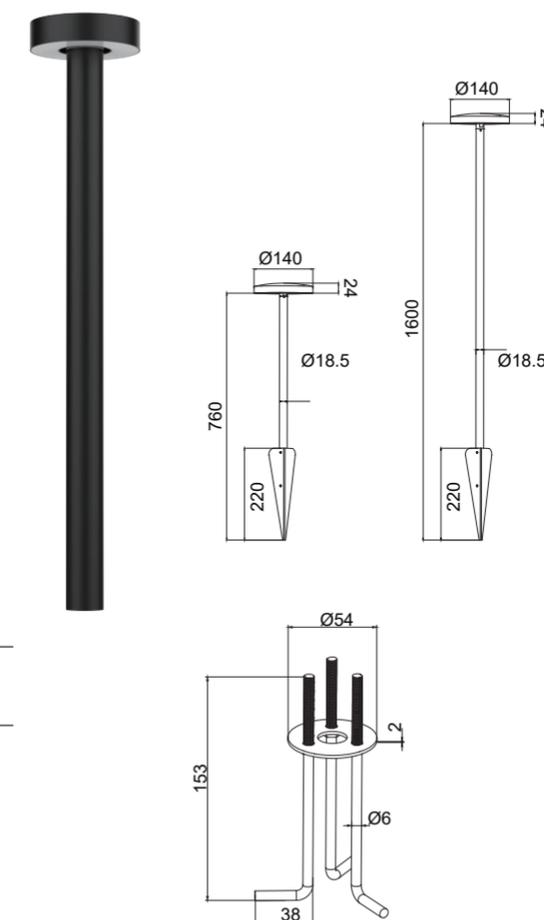



## OUTDOOR LIGHT

### LED wall light

Light emission on one side

Protection class IP 65  
 Aluminum and PMMA  
 3 years' availability guarantee

LED color temperature: 2200K, 2700K, 3000K


Finish color

RAL 9005
  RAL 7016
  RAL 6020
  RAL 8028



This light excels at its core purpose: providing just the right amount of light exactly where it's needed. Its gentle glow creates a harmonious ambiance, seamlessly integrating with your outdoor environment to highlight textures and architecture without harsh glare or light pollution. Its focused, low-level illumination clearly defines steps, pathways, and edges after dark, preventing missteps without overwhelming the senses.

The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires. For the products that you are interested in, you could find there all the needed information: power, luminous flux, CCT, CRI, etc.

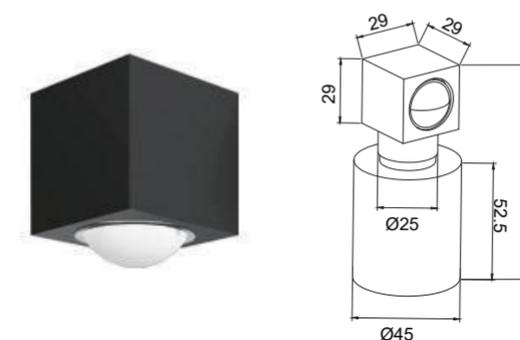

LED
III
DC48V
IP65

	W	LUM	CCT	BEAM	CRI	L	W	H
<b>FL981</b>	5	80	3000K	/	80	97.5	45	29

## OUTDOOR LIGHT

### LED garden light

Light emission on one side

Protection class IP 65  
aluminum and safety glass  
3 years' availability guarantee


LED color temperature: 2200K, 2700K, 3000K

Finish color

■ RAL 9005 ■ RAL 7016 ■ RAL 6020 ■ RAL 8028


Its clean design stands elegantly like a steadfast sentinel, adding a touch of modern sophistication while symbolically guarding your home's perimeter. Crafted for durability and weather resistance, this energy efficient LED light provides reliable, long-lasting ambient lighting to enhance safety and showcase your landscape's beauty after dusk

The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires. For the products that you are interested in, you could find there all the needed information: power, luminous flux, CCT, CRI, etc.

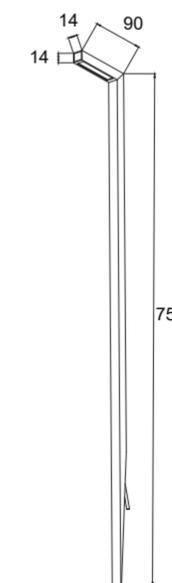

LED III DC48V IP65

	W	LUM	CCT	BEAM	CRI	L	W	H
FL984	8	398	3000K	/	80	603	148	83

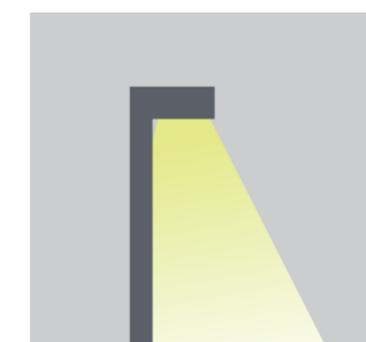

## OUTDOOR LIGHT

### LED garden light

Shielded light distribution

Protection class IP 65

Cast aluminum, aluminum and safety glass

3 years' availability guarantee


LED color temperature: 2200K, 2700K, 3000K

Finish color

RAL 9005
  RAL 7016
  RAL 6020
  RAL 8028


Adopted specially shielded optical design, this ensures light is directed exactly where it's needed – onto the ground and immediate surroundings – creating a safe, clearly defined pool of illumination without intrusive spill. The result is pure, functional light that respects the night sky and your home's tranquility. This discreet guardian casts its carefully contained beam downward and outward, illuminating pathways, borders, and garden features with precision while eliminating harsh glare and upward light loss.

The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires. For the products that you are interested in, you could find there all the needed information: power, luminous flux, CCT, CRI, etc.

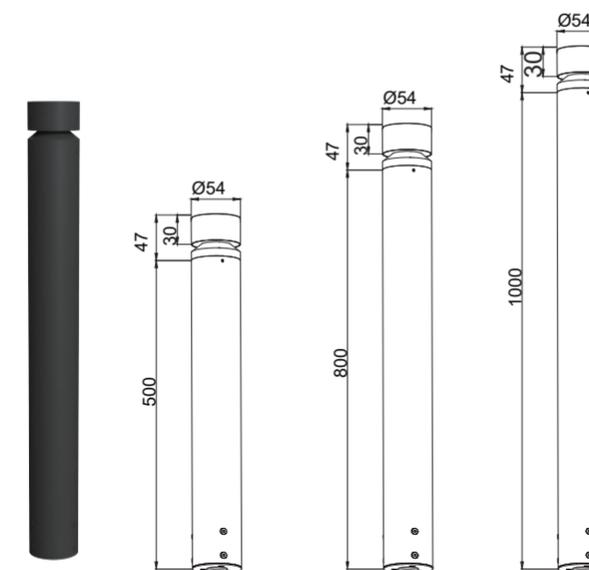

LED
⊕
AC 220-240 V
IP65

	W	LUM	CCT	BEAM	CRI	L	W	H
FL975-520	4	38	3000K	/	80	380	54	54
FL975-800	4	38	3000K	/	80	380	54	54
FL975-1000	4	38	3000K	/	80	380	54	54





## OUTDOOR LIGHT

### LED garden light

Shielded light distribution

Protection class IP 65  
 Cast aluminum, aluminum and safety glass  
 3 years' availability guarantee


LED color temperature: 2200K, 2700K, 3000K

Finish color

RAL 9005
  RAL 7016
  RAL 6020
  RAL 8028


This is a very special luminaire. The lighting part is surrounded and "protected" by a "handle". With the light shining downwards, it could be used in different ambience. Unique design, fashionable and reliable quality is the label of it. It really is a combination of "appearance and strength".

The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires. For the products that you are interested in, you could find there all the needed information: power, luminous flux, CCT, CRI, etc.

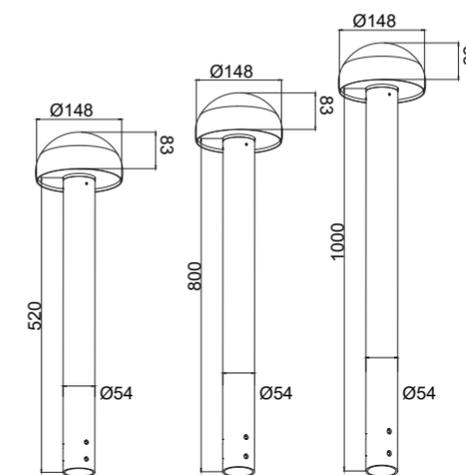

LED
⊕
AC 220-240 V
IP65

	W	LUM	CCT	BEAM	CRI	L	W	H
FL983-520	8	398	3000K	/	80	603	148	83
FL983-800	8	398	3000K	/	80	603	148	83
FL983-1000	8	398	3000K	/	80	603	148	83



## OUTDOOR LIGHT

### LED Wall light

Shielded light distribution

Protection class IP 65

Cast aluminum, aluminum and safety glass

3 years' availability guarantee


LED color temperature: 2200K, 2700K, 3000K

Finish color

■ RAL 9005 ■ RAL 7016 ■ RAL 6020 ■ RAL 8028

The soft curved outline of the mushroom shape exudes a warm and attractive glow. It embellishes the plain walls and makes the whole space warmer.

The design of the luminaires may get upgraded and the specifications of them may be adjusted by different degree. Please visit our website and check the detail description and specification of the luminaires. For the products that you are interested in, you could find there all the needed information: power, luminous flux, CCT, CRI, etc.

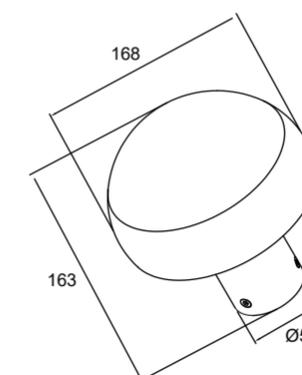

LED  AC 220-240 V IP65

	W	LUM	CCT	BEAM	CRI	L	W	H
WL685	8	398	3000K	/	80	603	148	83



CCT  
1800-2200-2700K

## Outdoor Light

LED outdoor lighting products, including the garden lights, ground lights and wall lights are the perfect solution for illuminating your garden, terrace and path and providing a tranquil backdrop to an evening spent relaxing outdoors.

OUTDOOR LIGHT

FL991

FL989

FL990

FL988

FL987

FL983

FL982

LED



DC24V

IP65

**NEW OUTDOOR LIGHT**

**LED garden light**

Shielded light distribution

Protection class IP 65

Cast aluminum, aluminum and safety glass

3 years' availability guarantee

LED color temperature: 2200K, 2700K, 3000K

Finish color

■ RAL 9005 ■ RAL 7016 ■ RAL 6020 ■ RAL 8028


The right choice of outdoor lighting can be adopted not only to bring a comfortable ambiance to our garden, but also to play a role as a guard in the dark, using selected pillar lights with a design for a safe entrance area.

LED III DC24V IP65


	W	LUM	CCT	BEAM	CRI	L	W	H
FL987-750	5	240	3000K	/	80	70	40	755
FL987-880	5	240	3000K	/	80	70	40	880
FL988-635	5	240	3000K	/	80	60	25	635
FL988-760	5	240	3000K	/	80	60	25	760
FL989-745	5	240	3000K	/	80	62	15	745
FL989-870	5	240	3000K	/	80	62	15	870
FL990-750	5	352	3000K	/	80	50	50	750
FL990-875	5	352	3000K	/	80	50	50	875
FL991-625	5	240	3000K	/	80	75X70	10	625
FL991-748	5	240	3000K	/	80	75X70	10	758
FL992-615	5	240	3000K	/	80	615	20	615
FL992-740	5	240	3000K	/	80	740	20	740
FL993-615	5	240	3000K	/	80	84	22	615
FL993-740	5	240	3000K	/	80	84	22	740




OUTDOOR LIGHT

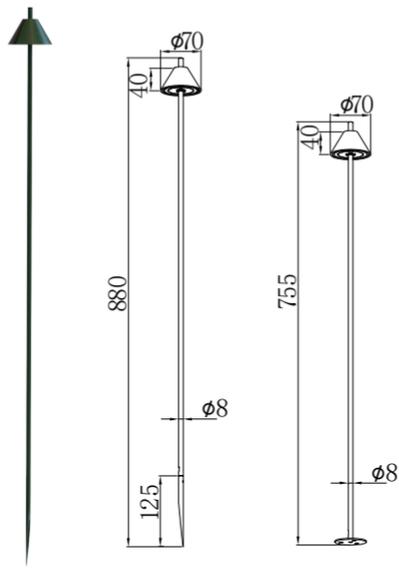


FL987

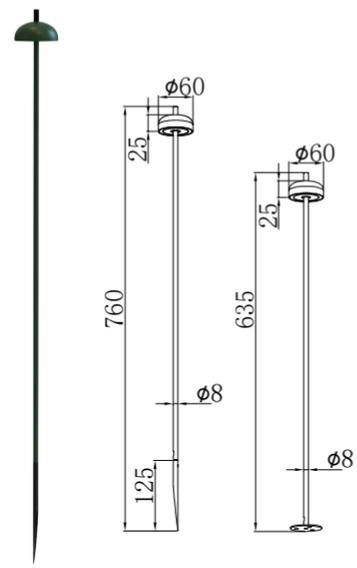


FL988

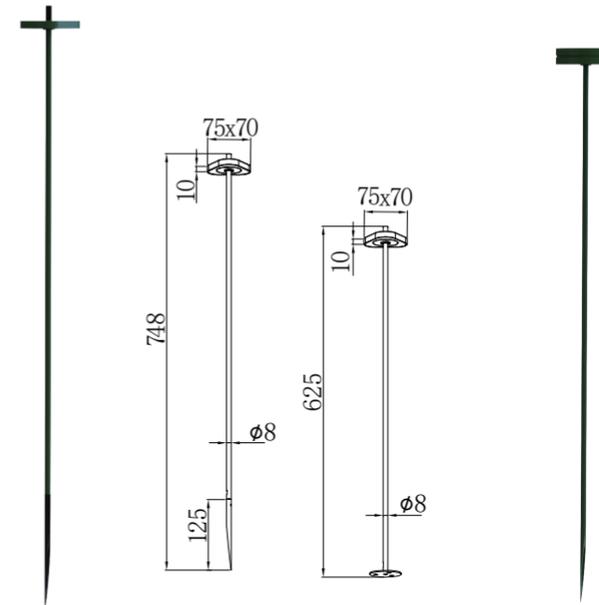


FL991

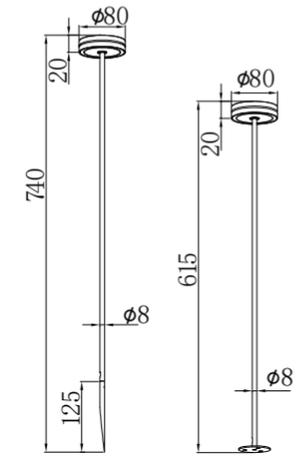


FL992

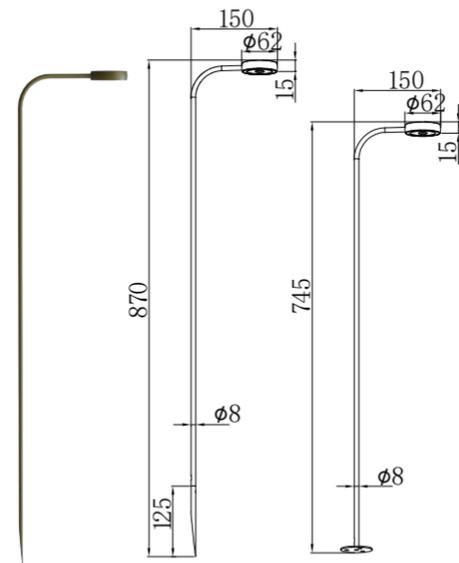

FL989

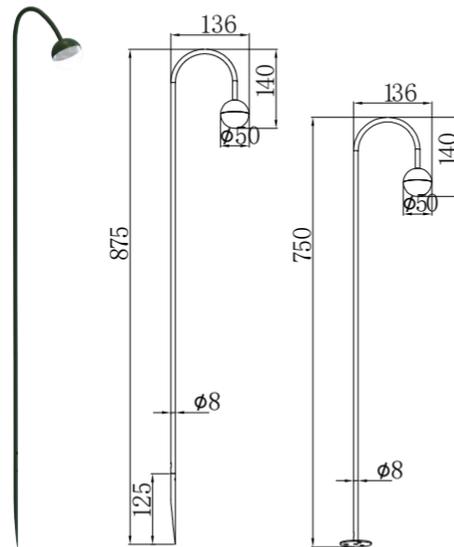

FL990

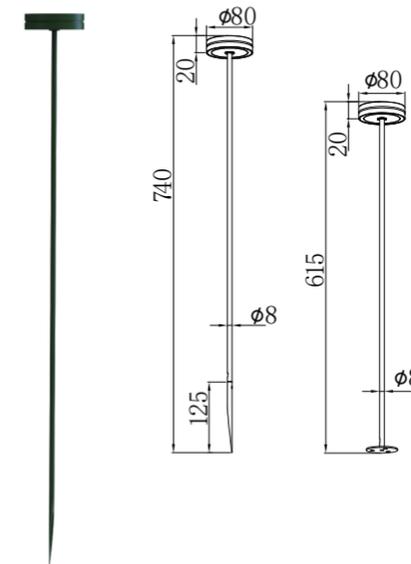

FL993

# 封底

9.5CM

# 封面

9.5CM

# 封面内页

9.5CM

# 封底内页

9.5CM

12.5CM

0.5CM

**KETAI®**

26

**NEW**



KETAI INDUSTRIES LIGHTING CO., LTD  
 Ketai Building, 4 Mashe New Street  
 Lishui, Nanhai, Post code 528244, Foshan  
 Guangdong, China  
 Phone: +86 757 8560 7707  
 Fax: +86 757 8560 3675  
 e-mail: sales@ketailighting.com

**OUTDOOR LIGHT**



**JOIN US**

1999	40,000m <sup>2</sup>	300+	60+
Founded	Area	Personnel	Patent

