


Echo

IP65 Downlight
135 lm/W 4000K
Fresnel Lens

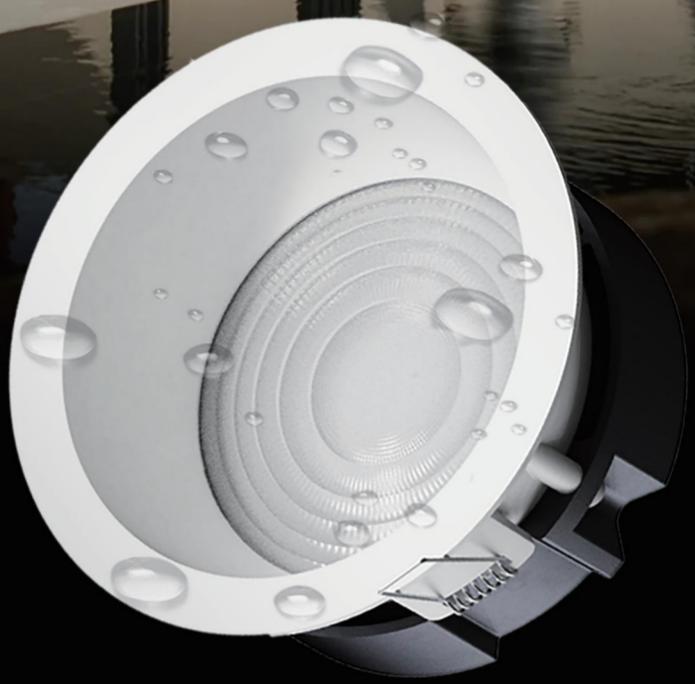

Unique Design Pattern

IP65






Star shaped petal pattern
heat sink



Every corner has potential!



Fresnel Lens



Cutout Size:
125mm/165mm/205mm

Power:20W/30W/40W

Application:
Bathroom, Eaves, Hospital..



Echo - Recessed Downlight



Light distribution

4000K CRI 90

KT7450 20W			80°
h (m)	E0° (lx)	Φ (m)	
1	1623	1.60	
2	405.7	3.21	
3	180.3	4.81	
4	101.4	6.41	
5	64.9	8.02	



Light distribution

4000K CRI 90

KT7451 30W			80°
h (m)	E0° (lx)	Φ (m)	
1	1623	1.60	
2	405.7	3.21	
3	180.3	4.81	
4	101.4	6.41	
5	64.9	8.02	



Light distribution

4000K CRI 90

KT7452 40W			50°
h (m)	E0° (lx)	Φ (m)	
1	3046	1.77	
2	761.5	3.55	
3	338.4	5.32	
4	190.4	7.10	
5	121.8	8.87	

Control Type on request

- On-off
- 0-10V
- Phase-Cut
- DALI
- Casambi

Luminaire specifications

Model	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
KT7450	20W	2682	4000K	80°	Φ125	SMD 2835	KEGU	65	90
KT7451	30W	4058	4000K	80°	Φ165	SMD 2835	KEGU	65	90
KT7452	40W	5400	4000K	80°	Φ195-Φ205	SMD 2835	KEGU	65	90

Frame finishing colour

Core Colours



Colour temperature range



Colour Rendering Index




Front Reflector color



Beam angle

KT7450/KT7451/KT7452

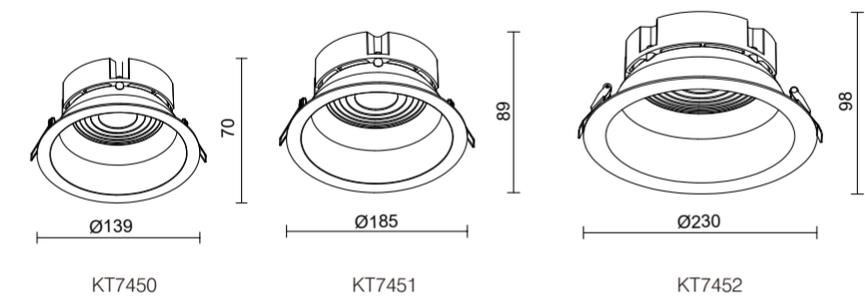

封底

9.5CM

封面

9.5CM

封面内页

9.5CM

封底内页

9.5CM

12.5CM

KETAI®

26
NEW

KETAI INDUSTRIES LIGHTING CO., LTD
Ketai Building, 4 Mashe New Street
Lishui, Nanhai, Post code 528244, Foshan
Guangdong, China
Phone: +86 757 8560 7707
Fax: +86 757 8560 3675
e-mail: sales@ketailighting.com

ECHO IP65 DOWNLIGHT
ECHO IP20 DOWNLIGHT

0.5CM

JOIN US

1999	40,000m ²	300+	60+
Founded	Area	Personnel	Patent

正面

63CM

36CM

Echo IP65
IP65 Downlight 135 LM/W 4000K

Ideal for demanding environments such as bathrooms, kitchens, hospitals and covered outdoor areas.

Available for Australian Market

Fresnel lens technology ensures precise light control and a sleek profile

Every corner has potential!

Brain Pattern Design - Patented Radiator

3 Versatile Sizes
3 CCT Switchable
High Efficiency & Distinctive Design

Echo IP65 - Recessed Downlight

Control Type on request
On-off, 0-10V, Phase-Cut, DALI, Casambi

Model	Power	Lumen	CCT	BA	Cutout	Light Source	Driver	IP	CR
KT7450	20W	2682	4000K	80°	Ø125	SMD 2835	KEGU	65	90
KT7451	30W	4058	4000K	80°	Ø165	SMD 2835	KEGU	65	90
KT7452	40W	5400	4000K	80°	Ø195-Ø205	SMD 2835	KEGU	65	90

KT7450: Ø139, 70mm height
KT7451: Ø185, 80mm height
KT7452: Ø230, 95mm height

Echo IP65 135 LM/W

Designed for superior performance and visual impact, our ECHO downlight series. These versatile fixtures deliver exceptional 135 lm/W efficiency while maintaining robust protection against dust and water ingress.

反面

63CM

36CM

DOWNLIGHT
Echo IP20
HIGH EFFICIENCY SERIALIZED SMD DOWNLIGHTS
CUTOUT SIZE FROM DIA.68MM TO DIA.210MM

**Sleek
Versatile
Affordable**

Echo IP20 - Recessed Downlight

KT7508 (Ø68-80), KT7509 (Ø90-100), KT7510 (Ø115-120)
KT7511 (Ø140-150), KT7512 (Ø160-170), KT7413 (Ø200-210)

Heatsink, Cover, Reflective Paper, SMD Chip, Spring, Lens, Deco-rings

Deco-rings Options
Chrome Black, White, Black, Bright Silver, Matte White, Matte Black

KT7508, KT7509, KT7510, KT7511, KT7512

Echo IP20

Sleek, Versatile, and Affordable.

IP20 ceiling lights in 5 sizes and 6 deco-rings colors—perfect for any space. Simple design, excellent heat dissipation. Unify your lighting style with ease.